

### Circuit-breaker, 3p, 250A

Part no. NZMN2-VEF250-NA Article no. 271130



Similar to illustration

Similar to illustration			
Delivery program			
Product range			Circuit-breaker
Protective function			Systems, cable, selectivity and generator protection
Standard/Approval			UL/CSA, IEC
Release system			Electronic release
Installation type			Fixed
Description			Switches conform to UL/CSA as well as the IEC regulations. IEC switching performance values are contained on the rating plate. Fixed overload releases Ir R.m.s. value measurement and "thermal memory" adjustable time delay setting to overcome current peaks tr: 2 – 20 s at 6 x Ir Adjustable delay time tsd: Steps: 0, 20, 60, 100, 200, 300, 500, 750, 1000 ms i <sup>2</sup> t constant function: fixed OFF
Frame size			NZM2
Number of poles			3 pole
Standard equipment			Screw connection
Switching capacity			
SCCR 480 V 60 Hz	I <sub>cu</sub>	kA	35
SCCR 600Y/347 V 60 Hz	I <sub>cu</sub>	kA	25
Rated current = rated uninterrupted current			
Rated current = rated uninterrupted current	$I_n = I_u$	Α	250
Setting range			
Overload trip			
中			
Overload release, min.	I <sub>r</sub>	Α	250
Short-circuit releases			
Non-delayed	$I_i = I_n x \dots$		3000 A fixed
Delayed	$I_{sd} = I_r x \dots$		2 - 10

### **Technical data**

General

	IEC/EN 60947
	Finger and back of hand proof to VDE 0106 Part 100
	Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
°C	- 40 - + 70
°C	-25 - +70
g	20 (half-sinusoidal shock 20 ms)
	°C °C

Between auxiliary contacts and main contacts		V AC	500	
between the auxiliary contacts		V AC	300	
Weight		kg	2.345	
Mounting position				
Mounting position			Vertical and 90° in all directions	With residual-current release XFI: - NZM1, N1, NZM2, N2: vertical and 90° in all directions with plug-in adapter elements - NZM1, N1, NZM2, N2: vertical, 90° right/left with withdrawable unit: - NZM3, N3: vertical, 90° left - NZM4, N4: vertical with remote operator: - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions
Direction of incoming supply			as required	
Degree of protection				
Device			In the operating controls area: IP2	0 (basic degree of protection)
Enclosures			With insulating surround: IP40 With door coupling rotary handle:	IP66
Terminations			Tunnel terminal: IP10 Phase isolator and strip terminal: I	P00
Other technical data (sheet catalogue)			Weight Temperature dependency, Deratin Effective power loss	g
Circuit-breakers				
Rated surge voltage invariability	$U_{\text{imp}}$			
Main contacts		V	8000	
Auxiliary contacts		V	6000	
Rated operational voltage	U <sub>e</sub>	V AC	690	
Overvoltage category/pollution degree			III/3	
Rated insulation voltage	Ui	V	1000	
Use in unearthed supply systems		V	≦ <sub>690</sub>	
Switching capacity				
Rated short-circuit making capacity	I <sub>cm</sub>			
240 V	I <sub>cm</sub>	kA	187	
400/415 V	I <sub>cm</sub>	kA	105	
440 V 50/60 Hz	I <sub>cm</sub>	kA	74	
525 V 50/60 Hz	I <sub>cm</sub>	kA	53	
690 V 50/60 H	Ic	kA	40	
Rated short-circuit breaking capacity I <sub>cn</sub>	I <sub>cn</sub>			
Icu to IEC/EN 60947 test cycle O-t-CO	lcu	kA		
240 V 50/60 Hz	I <sub>cu</sub>	kA	85	
400/415 V 50/60 Hz	I <sub>cu</sub>	kA	50	
440 V 50/60 Hz	I <sub>cu</sub>	kA	35	
525 V 50/60 Hz	I <sub>cu</sub>	kA	25	
690 V 50/60 Hz	I <sub>cu</sub>	kA	20	
lcs to IEC/EN 60947 test cycle 0-t-C0-t-C0	Ics			
1CS TO 1EL/EN 60947 TeST CYCIE U-T-LU-T-LU 240 V 50/60 Hz		kA kA	85	
	I <sub>cs</sub>			
400/415 V 50/60 Hz	I <sub>CS</sub>	kA	50	
440 V 50/60 Hz	I <sub>cs</sub>	kA	35	
525 V 50/60 Hz	I <sub>cs</sub>	kA	25	
690 V 50/60 Hz	I <sub>cs</sub>	kA	5	
Maximum low-voltage h.b.c. fuse		A gG/gL		ected short-circuit currents at the installation
			location exceed the switching cap	
Technical data that diverge from products for the IEC market Switching capacity of NA switches (UL489, CSA 22.2 No. 5.1) Short-circuit current rating SCCR				

SCOR 480 V80 No	SCCR 240 V 60 Hz	I <sub>cu</sub>	kA	85
SECON MINISTRATE OF THE PROPERTY OF THE PROP	SCCR 480 V 60 Hz		kA	35
Section   Sect				
1		¹cu	KA	23
Tell   1			I. A	10
Desiration category in ICP IN IDP 10 ICP IN IDP 11 ICP IN IDP 12 ICP IN ICP IN IDP 12 ICP IN ICP I		I <sub>CW</sub>		
Read output sound current		I <sub>cw</sub>	kA	
Read operational current				A
AC-1				
		I <sub>e</sub>	Α	
### 15 V MAP				
	400/415 V 50/60 Hz	l <sub>e</sub>	Α	300
AC-3  AC0115 V 50000 Hz  Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage released Lifespans, nechanical of Volucin max. 50 % trip by share/funder-voltage relea	415 V	l <sub>e</sub>	Α	300
March   1980   11	690 V 50/60 Hz	le	Α	250
Life page   mechanical for which max. 50 % trip by shuntfundervoltage release)	AC3			
Lifespan, mechanical (of which max, 50 % trip by shunt/undervoltage release)         Operations         20000           Lifespan, electrical         1         1           AC-1         400 V 50 00 H:         Operations         7500           402 V 50 00 H:         Operations         6500           415 V 50 00 H:         Operations         5000           482 V 50 00 H:         Operations         5000           483 V 50 00 H:         Operations         5000           484 V 50 00 H:         Operations         5000           Max operating frequency         Opul h         12           Terminal capacity         8         12           Terminal capacity         8         5000           Bot terminal         8         1 x (126)           Solid         8         1 x (126)           Stranded         9         1 x (126)           Bot terminal and rear-side connection         9         1 x (115)           Bot terminal and rear-side connection         9         1 x (115)           Bot ter	400/415 V 50/60 Hz	I <sub>e</sub>	Α	250
Lifespan, electrical  AC-1  400 V 50/00 Hz 680 V 50/00 Hz 680 V 50/00 Hz 680 V 50/00 Hz 690 V 50/00 Hz 7	690 V 50/60 Hz	l <sub>e</sub>	Α	250
Lifespan, electrical  AC-1  400 V 50/00 Hz 680 V 50/00 Hz 680 V 50/00 Hz 680 V 50/00 Hz 690 V 50/00 Hz 7	Lifespan, mechanical(of which max. 50 % trip by shunt/undervoltage release)			20000
AC-1 40 V 50/00 Hz 690 V 50/00 Hz 7500 AC-3 400 V 50/00 Hz AC-3 400 V 50/00				
AC-3				
AC-3		Operations		10000
400 V 50/500 Hz				7500
415 V 50/00 Hz   0 perations   0 500	AC3			
Second Solid Hz	400 V 50/60 Hz	Operations		6500
Second Solid Hz	415 V 50/60 Hz	Operations		6500
Max. operating frequency         Ops/h         120           Total downtime in a short-circuit         ms         < 10           Terminal capacity         Screw connection           Round copper conductor         Screw connection           Box terminal         Terminal         Terminal           Solid         mm²         1 x (126)           Stranded         mm²         1 x (4350)           Tunnel terminal         mm²         1 x (6350)           Stranded         mm²         1 x (4350)           Stranded         mm²         1 x (4350)           Bolt terminal and rear-side connection         mm²         1 x (4350)           Solid         mm²         1 x (116)           Stranded         mm²         1 x (4300)           Al conductors, Cu cable         mm²         1 x (4300)           Solid         mm²         1 x (6300)           Bolt terminal and rear-side connection         mm²         1 x (6300)           Flat copper strip, with holes         mm²         mm²         2 x 16 x 0.8           Rox terminal         mm²         2 x 9 x 0.8           Box terminal         mm²         1 0x 16 x 0.8           Box terminal         mm² <td>690 V 50/60 Hz</td> <td></td> <td></td> <td>5000</td>	690 V 50/60 Hz			5000
Total downtime in a short-circuit         ms         < 10           Terminal capacity           Standard equipment         Screw connection           Bout decopper conductor			Ops/h	120
Standard equipment         Service connection           Round copper conductor         Image: Conductor of the property of the copper conductor of the copper copper conductor of the copper co				<10
Box terminal         Feature (Company)         Feature (Company) <t< td=""><td></td><td></td><td></td><td></td></t<>				
Box terminal         mm²         1 x (12 6)           Stranded         mm²         1 x (4 350)           Tunnel terminal         mm²         1 x (6 350)           Stranded         mm²         1 x 16           Stranded         mm²         1 x (4 350)           Bolt terminal and rear-side connection         mm²         1 x (11 6)           Stranded         mm²         1 x (11 6)           Stranded         mm²         1 x (4 3/0)           Al conductors, Cu cable         mm²         1 x (4 3/0)           Solid         mm²         1 x (4 3/0)           Al conductors, Cu cable         mm²         1 x (4 3/0)           Solid mm²         1 x (4 3/0)           Al conductors, Cu cable         mm²         1 x (4 3/0)           Solid mm²         1 x (4 3/0)           Bolt terminal and rear-side connection         mm²         1 x (4 3/0)           Flat copper strip, with holes         min. mm         2 x 16 x 0.8           Flat copper strip, with holes         min. mm         2 x 16 x 0.8           Box terminal         min. mm         2 x 9 x 0.8           min. mm         0 x 16 x 0.8	Terminal capacity			
Solid   mm²   1x (12 6)     mm²   mm²   1x (13 350)     mm²   mm²   mm²   mm²   mm²   1x (13 350)     mm²				Screw connection
Stranded	Standard equipment			Screw connection
Tunnel terminal  Solid  Stranded  Stranded  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Stranded  Mm2  1 x (11 6)  Mm2  1 x (4 3/0)  All conductors, Cu cable  Solid  Mm2  1 x 16  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Flat copper strip, with holes  Box terminal  Min.  Mm  2 x 16 x 0.8  Max.  Mm  10 x 16 x 0.8  Box terminal  Min.  Mm  2 x 9 x 0.8  Box terminal  Min.  Mm  2 x 9 x 0.8  Max.  Mm  Min.  Min.  Mm  Min.  Mm  Min.	Standard equipment  Round copper conductor			Screw connection
Solid  Stranded  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Mm² 1x (4 350)  Mm² 1x (11 6)  The stranded  Mm² 1x (11 6)  The stranded  Mm² 1x (4 3/0)  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Min. mm 2x 16 x 0.8  Flat copper strip, with holes  Max. mm 10x 16x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  Min. mm 2x 9 x 0.8  Max. mm 10x 16x 0.8  Bolt terminal and rear-side connection	Standard equipment Round copper conductor Box terminal		mm <sup>2</sup>	
Solid  Stranded  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Mm² 1x (4 350)  Mm² 1x (11 6)  The stranded  Mm² 1x (11 6)  The stranded  Mm² 1x (4 3/0)  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Min. mm 2x 16 x 0.8  Flat copper strip, with holes  Max. mm 10x 16x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  Min. mm 2x 9 x 0.8  Max. mm 10x 16x 0.8  Bolt terminal and rear-side connection	Standard equipment  Round copper conductor  Box terminal  Solid			1 x (12 6)
Stranded mm²  Stranded mm²  1 x (4 350)  Bolt terminal and rear-side connection  Direct on the switch  Solid mm²  1 x (11 6)  Stranded mm²  1 x (4 3/0)  Al conductors, Cu cable  Solid mm²  1 x (4 3/0)  Al conductors, Cu cable  Solid mm²  1 x 16  Bolt terminal and rear-side connection  Flat copper strip, with holes min. mm 2 x 16 x 0.8  Flat copper strip, with holes max. mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  Bolt terminal and rear-side connection  min. mm 2 x 9 x 0.8  max. mm 10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded			1 x (12 6)
Stranded mm² 1 x (4 350)  Bolt terminal and rear-side connection  Direct on the switch  Solid mm² 1 x (1 30)  At conductors, Cu cable  Solid mm² 1 x (4 3/0)  At conductors, Cu cable  Solid mm² 1 x 16  Bolt terminal and rear-side connection  Flat copper strip, with holes min. mm 2 x 16 x 0.8  Flat copper strip, with holes max. mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min. mm 2 x 9 x 0.8  Bolt terminal and rear-side connection	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal		mm <sup>2</sup>	1 x (12 6) 1 x (4 350)
Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  max. mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min. mm 2 x 9 x 0.8  max. mm 10 x 16 x 0.8	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid		mm <sup>2</sup>	1 x (12 6) 1 x (4 350)
Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Solid  Mm² 1 x (4 3/0)  Al conductors, Cu cable  Solid  Mm² 1 x 16  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Min.  Mm 2 x 16 x 0.8  Flat copper strip, with holes  Max.  Mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  Min.  Mm 2 x 9 x 0.8  Max.  Mm 10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded		mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup>	1 x (12 6) 1 x (4 350) 1 x 16
Solid Stranded  Mm2  1 x (11 6)  mm2  1 x (4 3/0)  Al conductors, Cu cable  Solid  Mm2  1 x 16  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Min.  Mm  2 x 16 x 0.8  Flat copper strip, with holes  Max.  Mm  10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  Min.  Mm  2 x 9 x 0.8  Max.  Mm  10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded		mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup>	1 x (12 6) 1 x (4 350) 1 x 16
Stranded mm² 1 x (4 3/0)  Al conductors, Cu cable  Solid mm² 1 x 16  Bolt terminal and rear-side connection  Flat copper strip, with holes min. mm 2 x 16 x 0.8  Flat copper strip, with holes max. mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min. mm 2 x 9 x 0.8  Bolt terminal and rear-side connection	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection		mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup>	1 x (12 6) 1 x (4 350) 1 x 16
Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  min.  mm 2 x 16 x 0.8  Flat copper strip, with holes  max.  mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min.  mm 2 x 9 x 0.8  max.  mm 10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch		mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup>	1 x (12 6) 1 x (4 350) 1 x 16 1 x (4 350)
Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  min.  mm  2 x 16 x 0.8  Flat copper strip, with holes  max.  mm  10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min.  mm  2 x 9 x 0.8  max.  mm  10 x 16 x 0.8	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch		mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup> mm <sup>2</sup>	1 x (12 6) 1 x (4 350) 1 x 16 1 x (4 350)
Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  max.  mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min.  mm 2 x 9 x 0.8  max.  mm 10 x 16 x 0.8	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid		mm² mm² mm² mm² mm²	1 x (12 6) 1 x (4 350) 1 x 16 1 x (4 350) 1 x (11 6)
Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  max.  mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min.  mm 2 x 9 x 0.8  max.  mm 10 x 16 x 0.8	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded		mm² mm² mm² mm² mm²	1 x (12 6) 1 x (4 350) 1 x 16 1 x (4 350) 1 x (11 6)
Bolt terminal and rear-side connection  Flat copper strip, with holes  min.  mm 2 x 16 x 0.8  Flat copper strip, with holes  max.  mm 10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min.  mm 2 x 9 x 0.8  max.  mm 10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment  Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded		mm² mm² mm² mm² mm²	1 x (12 6) 1 x (4 350) 1 x 16 1 x (4 350) 1 x (11 6)
Flat copper strip, with holes  Flat copper strip, with holes  max.  mm  10 x 16 x 0.8  Cu strip (number of segments x width x segment thickness)  Box terminal  min.  mm  2 x 16 x 0.8  To x 16 x 0.8	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable		mm² mm² mm² mm² mm² mm²	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (4 350)  1 x (11 6) 1 x (4 3/0)
Flat copper strip, with holes  Cu strip (number of segments x width x segment thickness)  Box terminal  min. mm 2 x 9 x 0.8  max. mm 10 x 16 x 0.8	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid		mm² mm² mm² mm² mm² mm²	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (4 350)  1 x (11 6) 1 x (4 3/0)
Cu strip (number of segments x width x segment thickness)  Box terminal  min. mm 2 x 9 x 0.8  max. mm 10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection	min.	mm² mm² mm² mm² mm² mm² mm²	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (4 350)  1 x (11 6) 1 x (4 3/0)
Box terminal  min. mm 2 x 9 x 0.8  max. mm 10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes		mm² mm² mm² mm² mm² mm² mm² mma²	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (11 6) 1 x (4 3/0)  1 x 16  2 x 16 x 0.8
min. mm $2 \times 9 \times 0.8$ max. mm $10 \times 16 \times 0.8$ Bolt terminal and rear-side connection	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes		mm² mm² mm² mm² mm² mm² mm² mma²	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (11 6) 1 x (4 3/0)  1 x 16  2 x 16 x 0.8
max. mm 10 x 16 x 0.8  Bolt terminal and rear-side connection	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Cu strip (number of segments x width x segment thickness)		mm² mm² mm² mm² mm² mm² mm² mma²	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (11 6) 1 x (4 3/0)  1 x 16  2 x 16 x 0.8
Bolt terminal and rear-side connection	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Cu strip (number of segments x width x segment thickness)	max.	mm² mm² mm² mm² mm² mm² mm²	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (11 6) 1 x (4 3/0)  1 x 16  2 x 16 x 0.8  10 x 16 x 0.8
	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Cu strip (number of segments x width x segment thickness)	max.	mm² mm² mm² mm² mm² mm² mm² mm² mm² mm mm	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (11 6) 1 x (4 3/0)  1 x 16  2 x 16 x 0.8  10 x 16 x 0.8
The state of the s	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Cu strip (number of segments x width x segment thickness)  Box terminal	max.	mm² mm² mm² mm² mm² mm² mm² mm² mm² mm mm	1 x (12 6) 1 x (4 350)  1 x 16  1 x (4 350)  1 x (11 6) 1 x (4 3/0)  1 x 16  2 x 16 x 0.8  10 x 16 x 0.8
	Standard equipment Round copper conductor  Box terminal  Solid  Stranded  Tunnel terminal  Solid  Stranded  Stranded  Bolt terminal and rear-side connection  Direct on the switch  Solid  Stranded  Al conductors, Cu cable  Solid  Bolt terminal and rear-side connection  Flat copper strip, with holes  Flat copper strip, with holes  Cu strip (number of segments x width x segment thickness)  Box terminal  Bolt terminal and rear-side connection	max. min. max.	mm² mm² mm² mm² mm² mm² mm² mm mm	1 x (12 6)  1 x (4 350)  1 x 16  1 x (4 350)  1 x (4 350)  1 x (11 6)  1 x (4 3/0)  1 x 16  2 x 16 x 0.8  10 x 16 x 0.8  10 x 16 x 0.8

Flat copper strip, with holes	max.	mm	10 x 16 x 0.8
Copper busbar (width x thickness)	mm		
Bolt terminal and rear-side connection			
Screw connection			M8
Direct on the switch			
	min.	mm	16 x 5
	max.	mm	20 x 5
Control cables			
		$\text{mm}^2$	1 x (18 14) 2 x (18 16)

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	250
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	51.56
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects $\frac{1}{2} = \frac{1}{2} \left( \frac{1}{2} + \frac{1}{2} \right) \left( \frac{1}{2} + \frac{1}{2} + \frac{1}{2} \right) \left( \frac{1}{2} + \frac{1}$			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed. $\label{eq:constraint}$
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 6.0**

Low-voltage industrial components (EG000017) / Power circuit-breaker for trafo/generator/installation prot. (EC000228)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Circuit breaker for power transformer, generator and system protection (eci@ss8.1-27-37-04-09 [AJZ716010])


protection (eci@ss8.1-2/-3/-04-09 [AJZ/16010])		
Rated permanent current lu	A	250
Rated voltage	V	690 - 690
Rated short-circuit breaking capacity Icu at 400 V, 50 Hz	kA	50
Overload release current setting	Α	250 - 250
Adjustment range short-term delayed short-circuit release	Α	500 - 2500
Adjustment range undelayed short-circuit release	Α	3000 - 3000
Integrated earth fault protection		No


Type of electrical connection of main circuit	Screw connection
Device construction	Built-in device fixed built-in technique
Suitable for DIN rail (top hat rail) mounting	No
DIN rail (top hat rail) mounting optional	Yes
Number of auxiliary contacts as normally closed contact	0
Number of auxiliary contacts as normally open contact	0
Number of auxiliary contacts as change-over contact	0
Switched-off indicator available	No
With under voltage release	No
Number of poles	3
Position of connection for main current circuit	Front side
Type of control element	Rocker lever
Complete device with protection unit	Yes
Motor drive integrated	No
Motor drive optional	Yes
Degree of protection (IP)	IP20


# Approvals

Product Standards	UL 489; CSA-C22.2 No. 5-09; IEC 60947-2; CE marking
UL File No.	E31593
UL Category Control No.	DIVQ
CSA File No.	022086
CSA Class No.	1432-01
North America Certification	UL listed, CSA certified
Specially designed for North America	Yes
Suitable for	Feeder circuits, branch circuits
Current Limiting Circuit-Breaker	Yes
Max. Voltage Rating	600Y/347 V, 480 V
Degree of Protection	IEC: IP20; UL/CSA Type: -


#### Characteristics

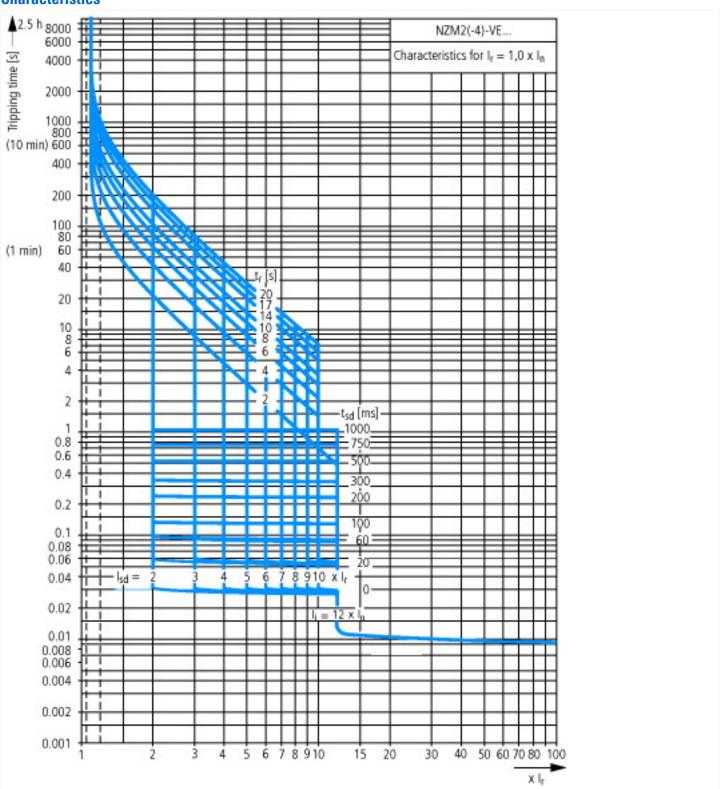

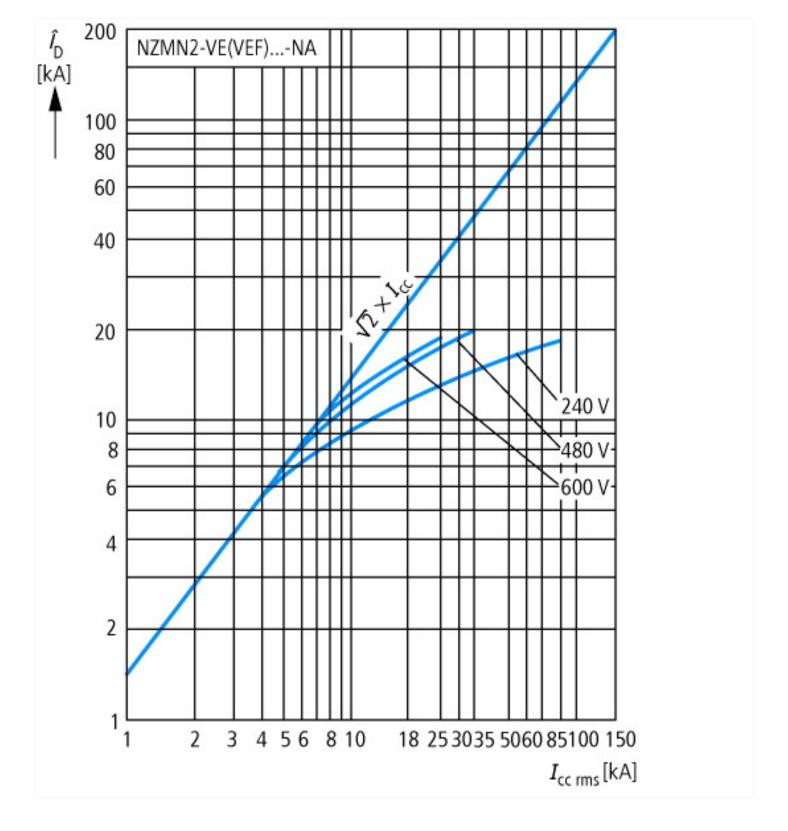

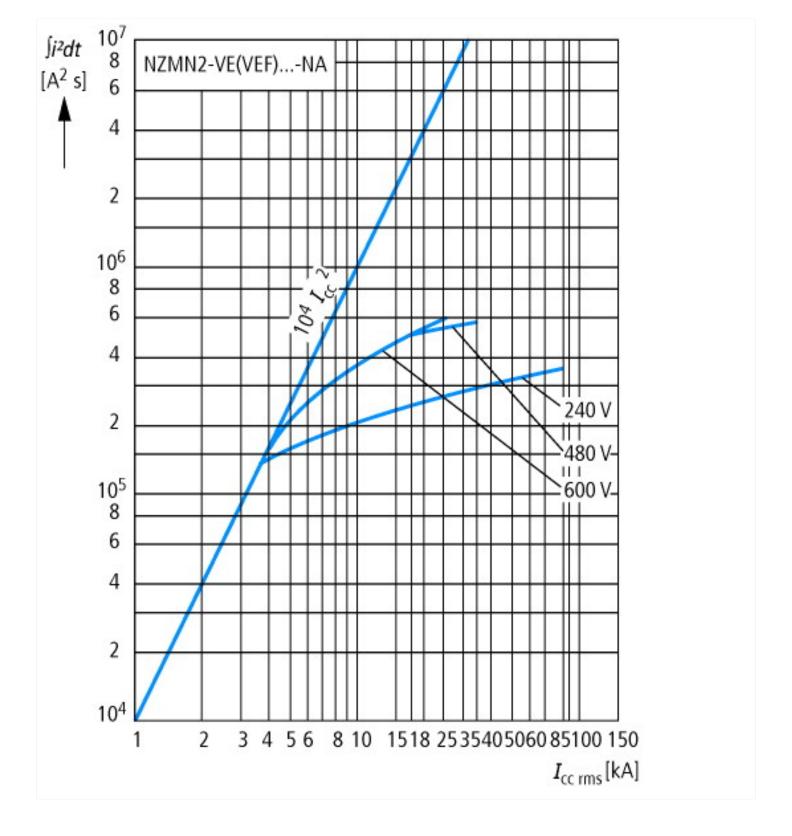


## **Dimensions**

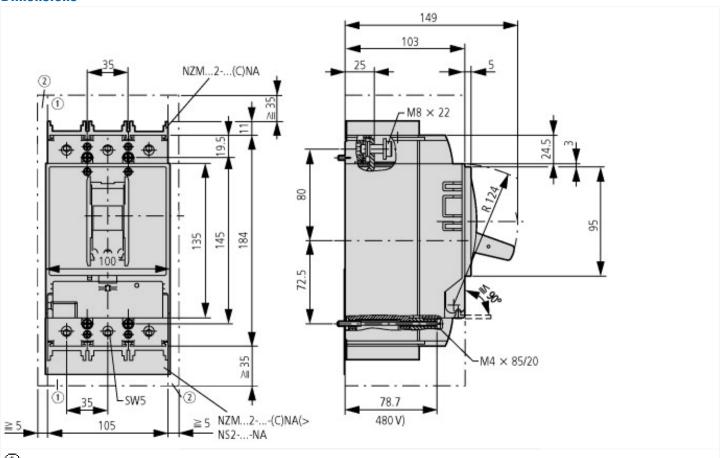

 $\begin{tabular}{c} \begin{tabular}{c} \begin{tabu$ 

 $\textcircled{2}_{\text{Minimum clearance to adjacent parts}}$ 

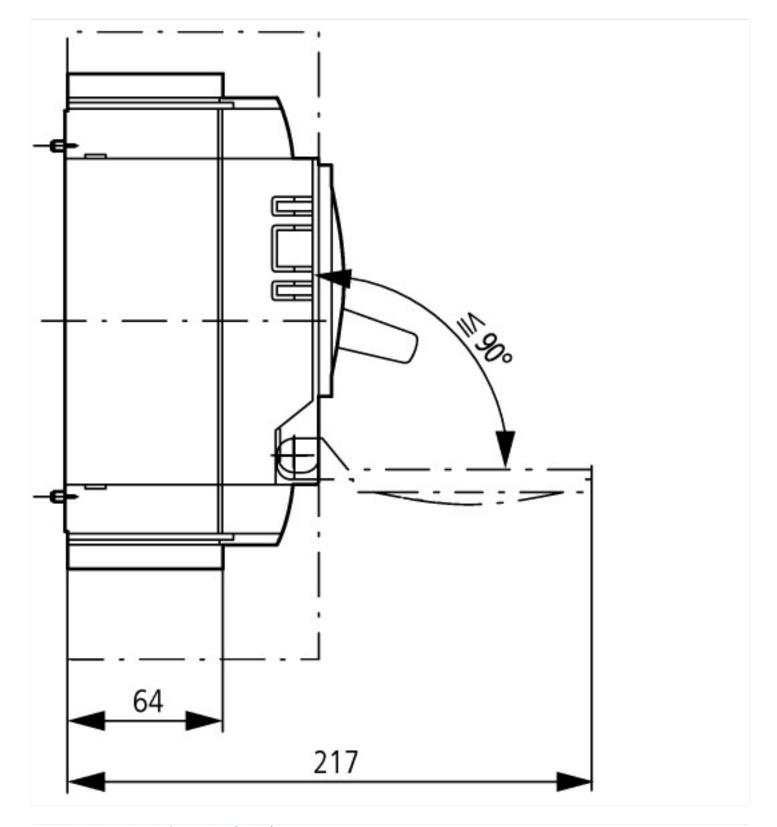

### **Additional product information (links)**

Additional product information (miks)				
IL01206006Z (AWA1230-1916) Circuit-Breaker, basic unit				
IL01206006Z (AWA1230-1916) Circuit-Breaker, basic unit	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01206006Z2015_11.pdf			
Weight	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.171			
Temperature dependency, Derating	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.172			
Effective power loss	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=17.174			