

1607418

https://www.phoenixcontact.com/us/products/1607418

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Contact insert set, Range of articles: VARIOCON, design: VC3, housing material: PA, number of positions: 32, min. conductor cross section: 0.14 mm², max. conductor cross section: 1.5 mm², rated voltage: 160, rated current: 10 A, Contact connection type: Pin. Connectors may only be connected/disconnected when under no load.



Commercial data

Item number	1607418
Packing unit	5 pc
Minimum order quantity	5 pc
Sales key	AB01
Product key	ABLADB
Catalog page	Page 24 (C-2-2013)
GTIN	4017918941130
Weight per piece (including packing)	59.12 g
Weight per piece (excluding packing)	60.94 g
Customs tariff number	85366990
Country of origin	PL



1607418

https://www.phoenixcontact.com/us/products/1607418

Technical data

Notes

General Connectors may only be connected/disconnected when under no load. Safety note WARNING: The connectors may not be plugged in or disconnected under load, ignoring the warning or improper use may damage persons and/or property. - WARNING: Commission property functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. - WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. - The products are suitable for applications in plant, controller, and electrical device engineering. - When operating the connectors in outdoor applications, they must be separately protected against environmental influences. - Assembled products may not be manipulated or improperly opened. - Only use mating connectors that are specified in the technical data of the standards itself (e.g. the online properly connect. - Only use mating connectors that are specified in the reduct accessories online at phoenixcontact.com/products. - When using the product in direct connection with third-party manufacturers, the user is responsible. - For operating voltages > 50 V AC, conductive connector housings must be grounded - Ensure that the protective or functional ground has been properly connected. - VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector - Observe the corresponding technical data. You will find information: - On the packing label - on the supplied documentation - Online at phoenixcontact.com/products under the product - On the packing label - on the supplied documenta	otes	
WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property. • WARNING: Commission property functioning products only. The products must be regularly inspected for damage. Decommission defective products inventicately. Replace damaged products. Repairs are not possible. • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. • The products are suitable for applications in plant, controller, and electrical device engineering. • When operating the connectors in outdoor applications, they must be separately protected against environmental influences. • Assembled products may not be manipulated or improperly opened. • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). • When using the product in direct connection with third-party manufacturers, the user is responsible. • For operating voltages > 50 V AC, conductive connector housings must be grounded • Ensure that the protective or functional ground has been properly connected. • VDE o100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: • On the product • On the product • On the supplied documentation • On the packing label • In the supplied documentation • Online at phoenixcontact.com/products under the product	General	
disconnected under load. Ignoring the warning or improper use may damage persons and/or property. •WARNING: Commission property functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. •WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. •The products are suitable for applications in plant, controller, and electrical device engineering. •When operating the connectors in outdoor applications, they must be separately protected against environmental influences. •Assembled products may not be manipulated or improperly opened. •Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). •When using the product in direct connection with third-party manufacturers, the user is responsible. •For operating voltages > 50 V AC, conductive connector housings must be grounded •Ensure that the protective or functional ground has been properly connected. •VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector •Observe the corresponding technical data. You will find information: •On the product •On the product •On the supplied documentation •On the supplied documentation	Safety note	
The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible. • WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. • The products are suitable for applications in plant, controller, and electrical device engineering. • When operating the connectors in outdoor applications, they must be separately protected against environmental influences. • Assembled products may not be manipulated or improperly opened. • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phenizontact.com/products). • When using the product in direct connection with third-party manufacturers, the user is responsible. • For operating voltages > 50 V AC, conductive connector housings must be grounded • Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: • On the product • On the product • On the product	Safety note	disconnected under load. Ignoring the warning or improper use
operate the product. They must observe the following safety notes. The qualified personnel rust be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product. • The products are suitable for applications in plant, controller, and electrical device engineering. • When operating the connectors in outdoor applications, they must be separately protected against environmental influences. • Assembled products may not be manipulated or improperly opened. • Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). • When using the product in direct connection with third-party manufacturers, the user is responsible. • For operating voltages > 50 V AC, conductive connector housings must be grounded • Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: • On the product • On the product • On the product		The products must be regularly inspected for damage. Decommission defective products immediately. Replace
and electrical device engineering. When operating the connectors in outdoor applications, they must be separately protected against environmental influences. Assembled products may not be manipulated or improperly opened. Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). When using the product in direct connection with third-party manufacturers, the user is responsible. For operating voltages > 50 V AC, conductive connector housings must be grounded Ensure that the protective or functional ground has been properly connected. VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector Observe the corresponding technical data. You will find information: On the product On the packing label In the supplied documentation Online at phoenixcontact.com/products under the product		operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are
must be separately protected against environmental influences. Assembled products may not be manipulated or improperly opened. Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). When using the product in direct connection with third-party manufacturers, the user is responsible. For operating voltages > 50 V AC, conductive connector housings must be grounded Ensure that the protective or functional ground has been properly connected. VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector Observe the corresponding technical data. You will find information: On the product On the product On the packing label In the supplied documentation Online at phoenixcontact.com/products under the product		·
opened. Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). When using the product in direct connection with third-party manufacturers, the user is responsible. For operating voltages > 50 V AC, conductive connector housings must be grounded Ensure that the protective or functional ground has been properly connected. VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector Observe the corresponding technical data. You will find information: On the product On the product On the packing label In the supplied documentation Online at phoenixcontact.com/products under the product		· · ·
data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products). • When using the product in direct connection with third-party manufacturers, the user is responsible. • For operating voltages > 50 V AC, conductive connector housings must be grounded • Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: • On the product • On the packing label • In the supplied documentation • Online at phoenixcontact.com/products under the product		
manufacturers, the user is responsible. • For operating voltages > 50 V AC, conductive connector housings must be grounded • Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: • On the product • On the product • On the packing label • In the supplied documentation • Online at phoenixcontact.com/products under the product		data of the standards listed (e.g. the ones listed in the product
housings must be grounded • Ensure that the protective or functional ground has been properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product		· ·
properly connected. • VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product		· · · · · ·
are applicable when combining several circuits in a cable and/or connector • Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product		
information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product		are applicable when combining several circuits in a cable and/or
Only use tools recommended by Phoenix Contact		information: o On the product o On the packing label o In the supplied documentation
		 Only use tools recommended by Phoenix Contact

• The installation notes/Design In documents online on the download page at phoenixcontact.com/products must be

Use a protective cap to protect connectors that are not in use.
 The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products
 Operate the connector only when it is fully plugged in.

observed for this product.



1607418

https://www.phoenixcontact.com/us/products/1607418


	 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	Observe the minimum bending radius of the cable. Lay the cable without twisting it.
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
oduct properties	
Туре	VC3
Product type	Contact insert
Product family	VARIOCON
Number of positions	32
Connection profile	31+PE
Number of module slots	4
Series	VC-D
nsulation characteristics	
Degree of pollution	3
Degree of pollution ctrical properties	3
ctrical properties Rated voltage (II/2)	320 V
ctrical properties Rated voltage (II/2) Rated voltage (III/2)	320 V 160 V
ctrical properties Rated voltage (II/2)	320 V 160 V 160 V
Ctrical properties Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3)	320 V 160 V 160 V 160 V
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD	320 V 160 V 160 V 160 V
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage	320 V 160 V 160 V 160 V 160 2.5 kV
Ctrical properties Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3)	320 V 160 V 160 V 160 V 160 2.5 kV 2.5 kV
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage (III/3)	320 V 160 V 160 V 160 V 160 2.5 kV 2.5 kV
Ctrical properties Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3)	320 V 160 V 160 V 160 V 160 2.5 kV 2.5 kV 2.5 kV
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage (III/3) Rated surge voltage (III/3)	320 V 160 V 160 V 160 V 160 2.5 kV 2.5 kV 2.5 kV 10 A 10 A
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated surge voltage Rated current	320 V 160 V 160 V 160 U 160 2.5 kV 2.5 kV 2.5 kV 10 A 10 A
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated current Nominal voltage U _N	320 V 160 V 160 V 160 V 160 U 160 U 2.5 kV 2.5 kV 10 A 10 A 10 A 10 A
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated current Nominal voltage U _N Nominal current I _N	320 V 160 V 160 V 160 U 160 2.5 kV 2.5 kV 2.5 kV 10 A 10 A
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated current Nominal voltage U _N Nominal current I _N	320 V 160 V 160 V 160 V 160 U 2.5 kV 2.5 kV 10 A 10 A 10 A 10 A 10 A
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated current Nominal voltage U _N Nominal current I _N nnection data Tightening torque	320 V 160 V 160 V 160 V 160 0 2.5 kV 2.5 kV 2.5 kV 10 A 10 A 10 A 10 A 10 A
Rated voltage (II/2) Rated voltage (III/2) Rated voltage (III/3) Nominal voltage ATD Rated surge voltage Rated surge voltage Rated surge voltage Rated current Nominal voltage U _N Nominal current I _N	320 V 160 V 160 V 160 V 160 U 2.5 kV 2.5 kV 10 A 10 A 10 A 10 A 10 A

Dimensions



1607418

https://www.phoenixcontact.com/us/products/1607418

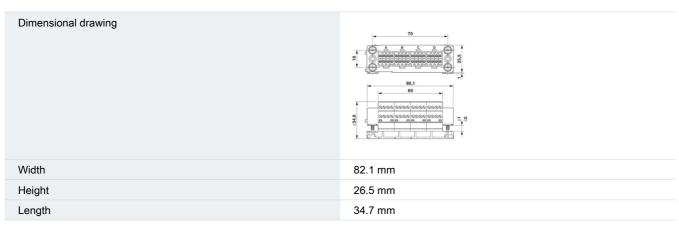

Material specifications

Color of the housing part	gray
Material	Polyamide
	Polyamide
Flammability rating according to UL 94	V0
Insulating material group	I / CTI 600
Contact material	CuZn
Contact surface material	nickel-plated
Contact carrier material	PA
Material for screw connection	1.5523 (19MNB4) 10.9
Housing material	PA

Cable/line

Single wire, cross section	0.14 mm² 1.5 mm²
Stripping length of the individual wire	7 mm

Mechanical properties

Mechanical data

iculatival data	
Insertion/withdrawal cycles	≥ 100

Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C 100 °C
---------------------------------	---------------



1607418

https://www.phoenixcontact.com/us/products/1607418

Classifications

UNSPSC 21.0

ECLASS

27440223	
27440223	
27440223	
ETIM	
EC003557	

39121400



1607418

https://www.phoenixcontact.com/us/products/1607418

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com