



Variable speed starter, single-phase mains connection, three-phase motor connection at 230 V, 9.6 A and 2.2 kW / 0.3 HP

Part no. DE1-129D6NN-N20N
Article no. 177364
Catalog No. DE1-129D6NN-N20N

Delivery program

Product range			Variable speed starter
Part group reference (e.g. DIL)			DE1
Rated operational voltage	U_e		230 V AC, 1-phase 240 V AC, single-phase
Output voltage with V_e	U_2		230 V AC, 3-phase 240 V AC, 3-phase
Mains voltage (50/60Hz)	U_{LN}	V	200 (-10%) - 240 (+10%)
Rated operational current			
At 150% overload	I_e	A	9.6
Note			Rated operational current at an operating frequency of 16 kHz and an ambient air temperature of +50 °C
Note			Overload cycle for 60 s every 600 s
Assigned motor rating			
Note			for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm ⁻¹ at 50 Hz or 1800 min ⁻¹ at 60 Hz
Note			Overload cycle for 60 s every 600 s
Note			at 230 V, 50 Hz
150 % Overload	P	kW	2.2
150 % Overload	I_M	A	8.7
Note			at 220 - 240 V, 60 Hz
150 % Overload	P	HP	3
150 % Overload	I_M	A	9.6
Degree of Protection			IP20/NEMA 0
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU
Frame size			FS2
Connection to SmartWire-DT			with SmartWire-DT module DX-NET-SWD3

Technical data

General

Standards			Specification for general requirements: IEC/EN 61800-2 EMC requirements: IEC/EN 61800-3 Safety requirements: IEC/EN 61800-5-1
Certifications			CE, UL, cUL, c-Track
Production quality			RoHS, ISO 9001
Climatic proofing	ρ_w	%	< 95%, average relative humidity (RH), non-condensing, non-corrosive
Ambient temperature			
operation (150 % overload)	θ	°C	-10 - +60
Storage	θ	°C	-40 - +70
Radio interference level			
Radio interference class (EMC)			C1, C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary.
Environment (EMC)			1st and 2nd environments
maximum motor cable length	l	m	C1 ≤ 5 m C2 ≤ 10 m C3 ≤ 25 m
Mechanical shock resistance		g	15 (11 m/s, EN 60068-2-27)
Vibration			EN 61800-5-1

Altitude		m	0 - 1000 m above sea level Above 1000 m: 1% derating for every 100 m max. 2000 m
Degree of Protection			IP20/NEMA 0
Protection against direct contact			BGV A3 (VBG4, finger- and back-of-hand proof)

Main circuit

Supply			
Rated operational voltage	U_e		230 V AC, 1-phase 240 V AC, single-phase
Mains voltage (50/60Hz)	U_{LN}	V	200 (-10%) - 240 (+10%)
Input current (150% overload)	I_{LN}	A	23.2
Supply frequency	f_{LN}	Hz	50/60
Frequency range	f_{LN}	Hz	45 - 66
Mains switch-on frequency			Maximum of one time every 30 seconds
Power section			
Overload current (150% overload)	I_L	A	14.4
max. starting current (High Overload)	I_H	%	200
Note about max. starting current			for 1.875 seconds every 600 seconds
Output voltage with V_e	U_2		230 V AC, 3-phase 240 V AC, 3-phase
Output Frequency	f_2	Hz	0 - 50/60 (max. 300)
Switching frequency	f_{PWM}	kHz	16 adjustable 4 - 32 (audible)
Operation Mode			U/f control Speed control with slip compensation
Frequency resolution (setpoint value)	Δf	Hz	0.025
Rated operational current			
At 150% overload	I_e	A	9.6
Note			Rated operational current at an operating frequency of 16 kHz and an ambient air temperature of +50 °C
Maximum leakage current to ground (PE) without motor	I_{PE}	mA	< 3,5 AC, < 10 DC
Frame size			FS2
Motor feeder			
Note			for normal internally and externally ventilated 4 pole, three-phase asynchronous motors with 1500 rpm ⁻¹ at 50 Hz or 1800 min ⁻¹ at 60 Hz
Note			Overload cycle for 60 s every 600 s
Note			at 230 V, 50 Hz
150 % Overload	P	kW	2.2
Note			at 220 - 240 V, 60 Hz
150 % Overload	P	HP	3
Apparent power			
Apparent power at rated operation 230 V	S	kVA	3.82
Apparent power at rated operation 240 V	S	kVA	3.99
Braking function			
Standard braking torque			max. 30 % M_N
DC braking torque			adjustable to 100 %

Control section

Reference voltage	U_s	V	10 V DC (max. 0.2 mA)
Analog inputs			1, parameterizable, 0 - 10 V DC, 0/4 - 20 mA
Digital inputs			4, parameterizable, 10 - 30 V DC
Relay outputs			1, parameterizable, N/O, 6 A (250 V, AC-1) / 5 A (30 V, DC-1)
Interface/field bus (built-in)			OP-Bus (RS485)/Modbus RTU

Assigned switching and protective elements

Power Wiring			
Safety device (fuse or miniature circuit-breaker)			
IEC (Type B, gG), 150 %			FAZ-B32/1N
UL (Class CC or J)		A	35
Mains contactor			

150 % overload (CT/I _H , at 50 °C)		DILEM-... + P1DILEM
110 % overload (VT/I _L , at 40 °C)		DILM7-... + DILM12-XP1
Main choke		
150 % overload (CT/I _H , at 50 °C)		DX-LN1-024
Radio interference suppression filter (external, 150 %)		DX-EMC12-025-FS2
Note regarding radio interference suppression filter		Optional external radio interference suppression filter for longer motor cable lengths and for use in different EMC environments
Motor feeder		
motor choke		
150 % overload (CT/I _H , at 50 °C)		DX-LM3-011

Design verification as per IEC/EN 61439

Technical data for design verification		
Operating ambient temperature min.	°C	-10
Operating ambient temperature max.	°C	50

Technical data ETIM 6.0


Low-voltage industrial components (EG000017) / Frequency converter =< 1 kV (EC001857)		
Electric engineering, automation, process control engineering / Electrical drive / Static frequency converter / Static frequency converter = < 1 kv (ecl@ss8.1-27-02-31-01 [AKE177011])		
Mains voltage	V	200 - 240
Mains frequency		50/60 Hz
Number of phases input		1
Number of phases output		3
Max. output frequency	Hz	300
Max. output voltage	V	230
Rated output current I _{2N}	A	9.6
Max. output at quadratic load at rated output voltage	kW	0.5
Max. output at linear load at rated output voltage	kW	0.5
With control unit		No
Application in industrial area permitted		Yes
Application in domestic- and commercial area permitted		Yes
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		Yes
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		Yes
Number of HW-interfaces industrial Ethernet		0
Number of HW-interfaces PROFINET		0

Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		1
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		0
Number of HW-interfaces parallel		0
Number of HW-interfaces other		0
With optical interface		No
With PC connection		Yes
Integrated breaking resistance		No
4-quadrant operation possible		No
Type of converter		U converter
Degree of protection (IP)		IP20
Height	mm	230
Width	mm	90
Depth	mm	168
Relative symmetric net frequency tolerance	%	5
Relative symmetric net current tolerance	%	10

Approvals

Product Standards		UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking
UL File No.		E172143
UL Category Control No.		NMMS, NMMS7
CSA File No.		UL report applies to both US and Canada
North America Certification		UL listed, certified by UL for use in Canada
Specially designed for North America		No
Suitable for		Branch circuits
Max. Voltage Rating		1~ 240 V AC IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wey)
Degree of Protection		IEC: IP20

Dimensions

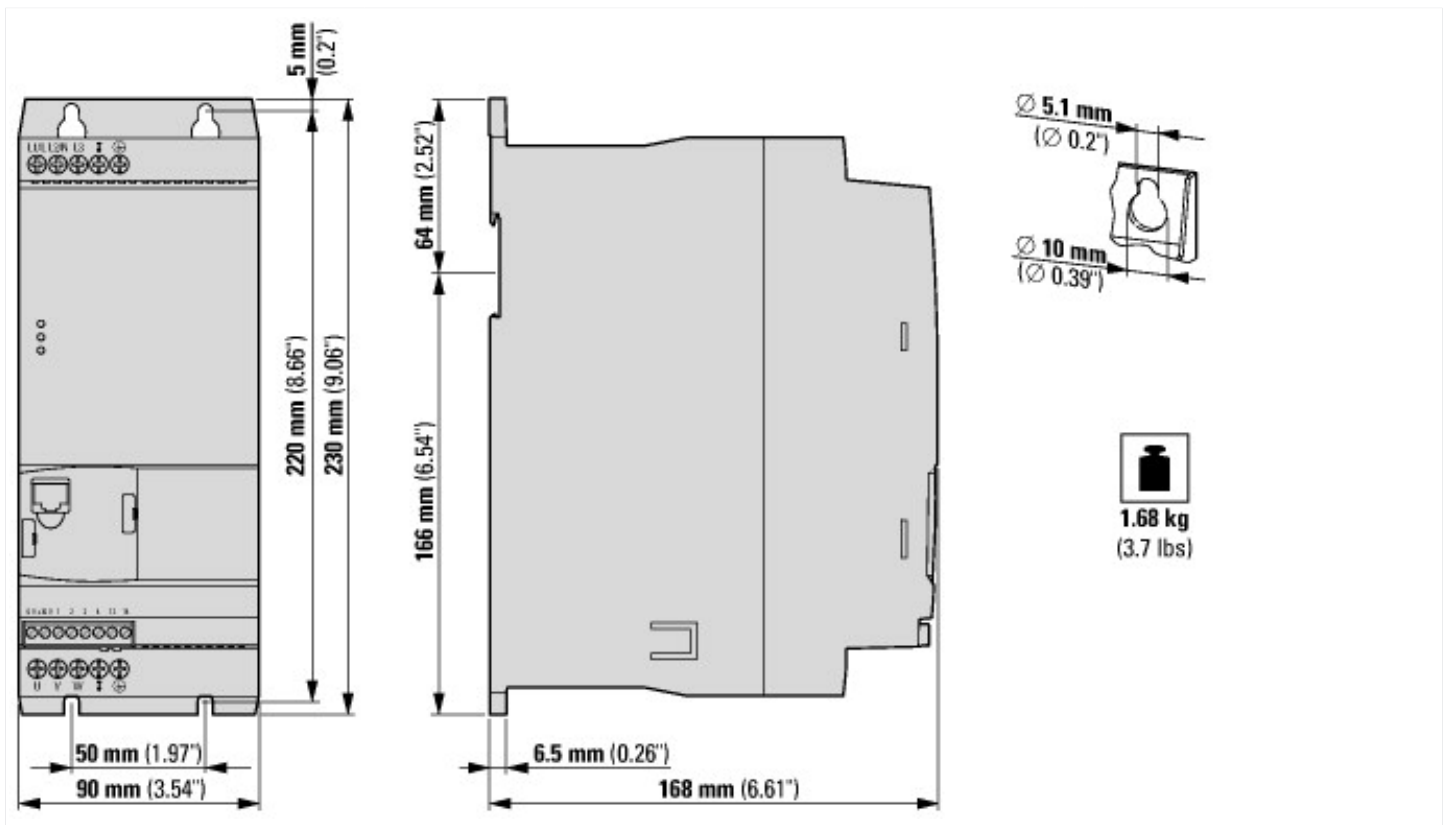

Additional product information (links)

IL040005ZU DE1 variable frequency drive

IL040005ZU DE1 variable frequency drive	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL040005ZU2016_03.pdf
MN040011 DE1 Variable speed starter, Manual	
MN040011 Drehzahlstarter DE1, Handbuch - Deutsch	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN040011_DE.pdf
MN040011 DE1 Variable speed starter, Manual - English	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN040011_EN.pdf
MN040011 Démarreur à vitesse variable DE1, manuel d'utilisation - français	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN040011_FR.pdf
MN040011 Avviatore a velocità variabile DE1, Manuale - italiano	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN040011_IT.pdf
MN040011 DE1 Variable speed starter, Manual	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN040011_NO.pdf
MN040011 Rozrusznik silnikowy z regulacją prędkości DE1, podręcznik - polski	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN040011_PL.pdf
MN040011 DE1 Variable speed starter, Manual - русский	ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN040011_RU.pdf
CA04020001Z-DE Sortimentskatalog: Antriebstechnik effizient gestalten, Motoren starten und steuern	http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238_de.pdf