

Part no. Article no. Catalog No. FAZ-B16/1N 278648 FAZ-B16/1N



Similar to illustration

Delivery program

| Basic function | | | Miniature circuit breakers |
|---|----------------|----|--|
| Number of poles | | | 1 pole+N |
| Tripping characteristic | | | В |
| Application | | | Switchgear for industrial and advanced commercial applications |
| Rated current | I _n | А | 16 |
| Rated switching capacity acc. to IEC/EN 60947-2 | | kA | 15 |
| Product range | | | FAZ |

Technical data

| Electrical | | | |
|---|----------------|-----------------|---|
| Standards | | | IEC/EN 60947-2 IEC/EN 60898 |
| Rated operational voltage | U _e | V | |
| | U _e | V AC | 230/400 |
| | | V DC | 48 (per pole) |
| Rated switching capacity acc. to IEC/EN 60947-2 | | kA | 15 |
| Operational switching capacity | | kA | 7.5 |
| Characteristic | | | B, C, D |
| Max. back-up fuse | | A gL/gG | 125 |
| Selectivity Class | | | 3 |
| Lifespan | Operations | | > 10000 |
| Direction of incoming supply | | | as required |
| Mechanical | | | |
| Standard front dimension | | mm | 45 |
| Enclosure height | | mm | 80 |
| Terminal protection | | | Finger and back-of-hand proof to BGV A2 |
| Mounting width per pole | | mm | 17.5 |
| Mounting | | | IEC/EN 60715 top-hat rail |
| Degree of Protection | | | IP20, IP40 (when fitted) |
| Terminals top and bottom | | | Twin-purpose terminals |
| Terminal capacities | | mm ² | |
| | | mm ² | 1 x 25 |
| | | mm ² | 2 x 10 |
| Thickness of busbar material | | mm | 0.8 2 |
| Mounting position | | | As required |

Design verification as per IEC/EN 61439

| Technical data for design verification | | | |
|--|-------------------|----|-----|
| Rated operational current for specified heat dissipation | I _n | А | 16 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 2.6 |
| Static heat dissipation, non-current-dependent | P _{vs} | W | 0 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -40 |


| Operating ambient temperature max. | °C | 75 |
|--|----|--|
| | | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |
| EC/EN 61439 design verification | | |
| 10.2 Strength of materials and parts | | |
| 10.2.2 Corrosion resistance | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | |
| 10.9.2 Power-frequency electric strength | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


Technical data ETIM 6.0


Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)


| Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB) (ecl@ss8.1-27-14-19-01 [AAB905011]) | | | |
|--|----|---------|--|
| Release characteristic | | В | |
| Number of poles (total) | | 2 | |
| Number of protected poles | | 2 | |
| Nominal rated current | А | 16 | |
| Nominal rated voltage | V | 230 | |
| Rated short-circuit breaking capacity Icn EN 60898 at 230 V | kA | 10 | |
| Rated short-circuit breaking capacity Icn EN 60898 at 400 V | kA | 10 | |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V | kA | 15 | |
| Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V | kA | 15 | |
| Voltage type | | AC | |
| Current limiting class | | 3 | |
| Frequency | Hz | 50 - 60 | |
| Concurrently switching N-neutral | | Yes | |
| Suitable for flush-mounted installation | | No | |
| Over voltage category | | 3 | |
| Pollution degree | | 2 | |
| Width in number of modular spacings | | 2 | |
| Built-in depth | mm | 70.5 | |
| Additional equipment possible | | Yes | |
| Degree of protection (IP) | | IP20 | |


Characteristics

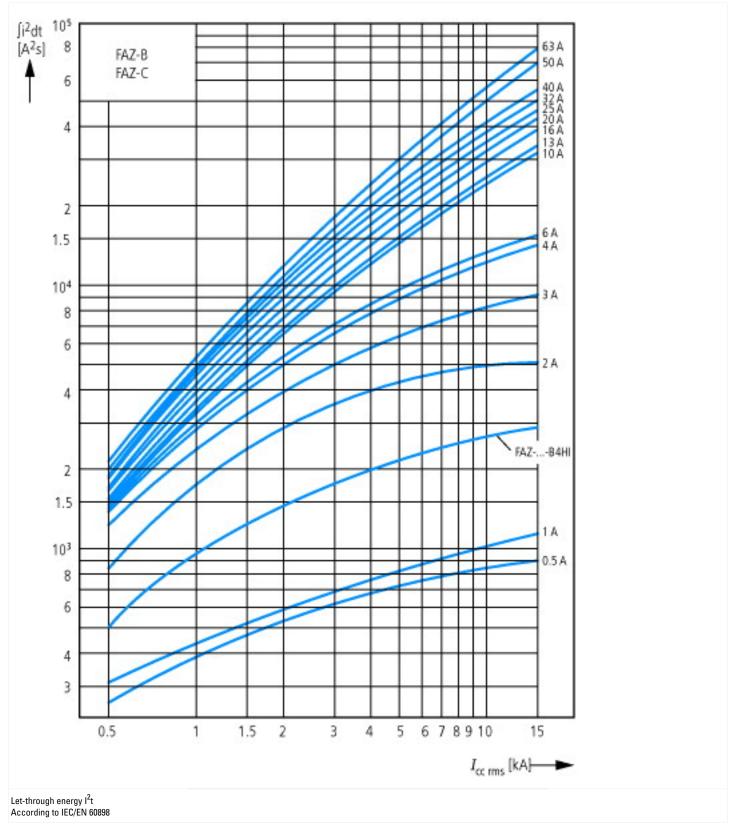

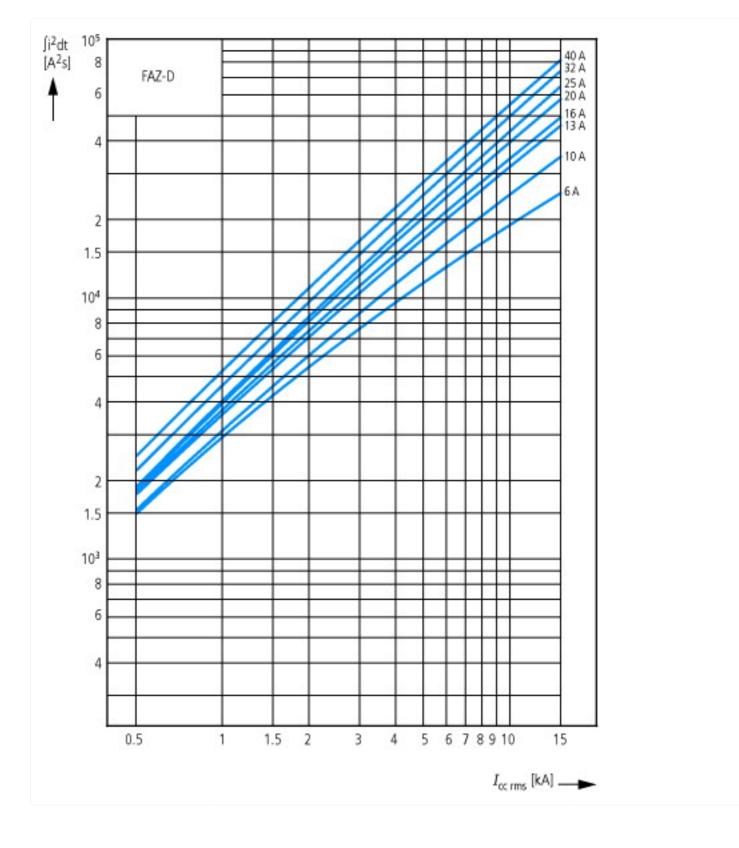


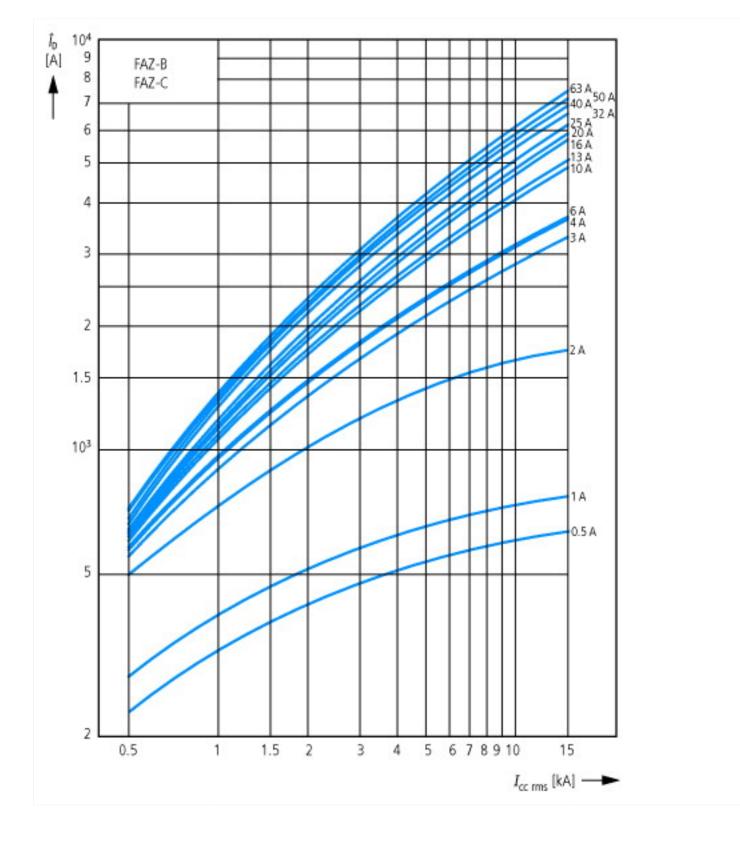

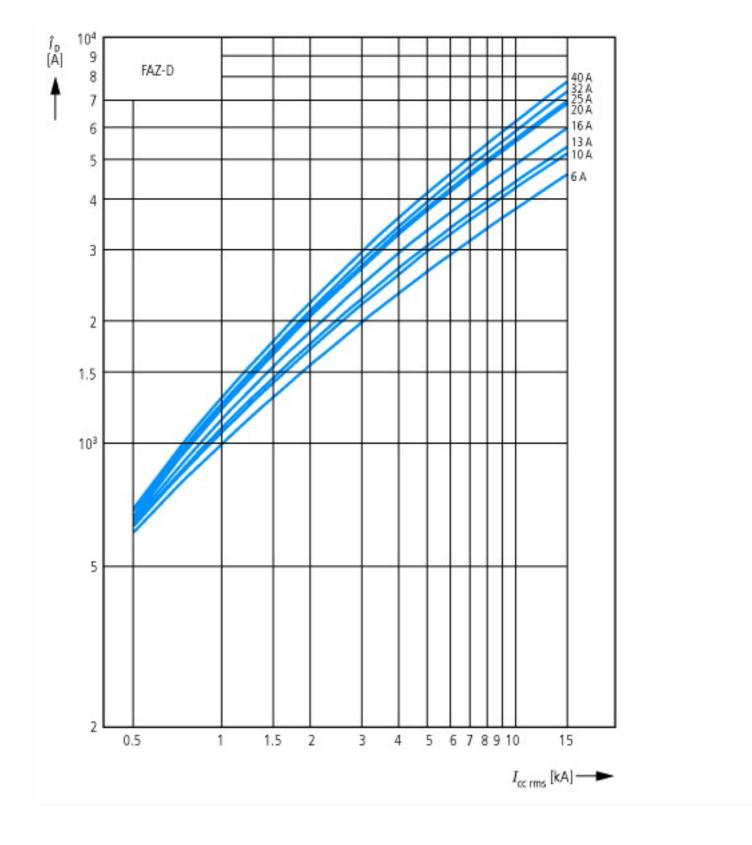

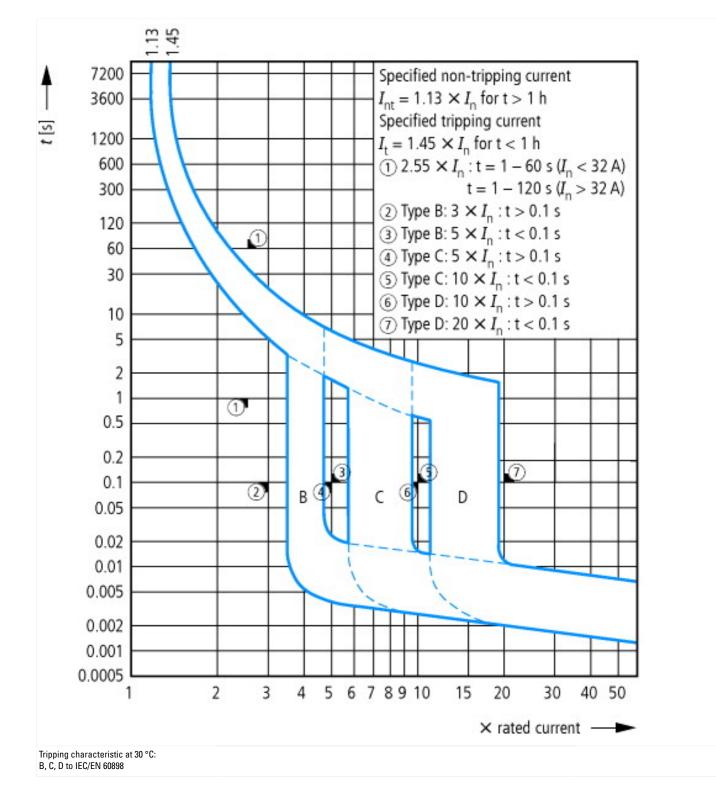

Dimensions

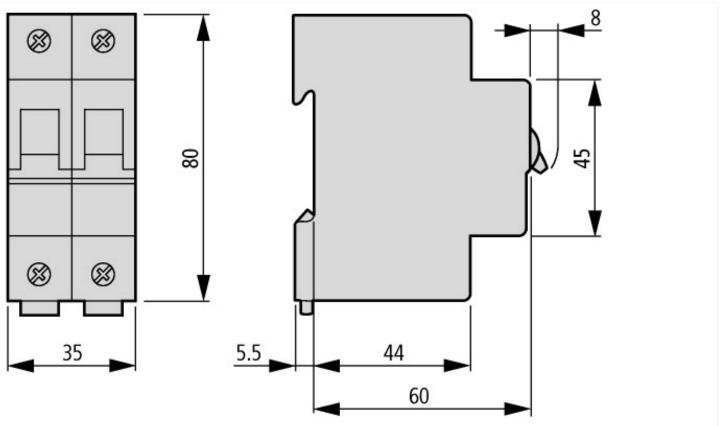

Additional product information (links)

AWA1220-1755 Circiut-breaker AWA1220-1755 Circiut-breaker

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17550701.pdf