


Auxiliary contact, for FI..., 1W+1N/C, 0.5HP

Part no. FIPA-XAM011
Article no. 262578



Delivery program

Basic function			Accessories for residual current circuit breakers
Basic function accessories			Auxiliary contacts
Product range			Accessory
Contact sequence			

Technical data

Electrical

Contact function			1 C/O + 1 B
Rated frequency	f	Hz	50/60
Rated operational current			
AC-11	I_e		
230 V	I_e	A	6
DC-11			
230 V	I_e	A	1
Rated insulation voltage	U_i	V AC	440
Max. admissible back-up fuse		A gL	
Max. admissible back-up fuse		A gL	6

Mechanical

Standard front dimension		mm	45
Enclosure height		mm	90
Mounting width		mm	8.8 (0.5 space unit)
Mounting			IEC/EN 60715 top-hat rail
Degree of protection			
Integrated			IP40
Switch			IP20
Terminal protection			Protection against electric shock to IEC 536
Terminals			Twin-purpose terminals
Terminal capacities		mm ²	
Solid		mm ²	2.5
flexible		mm ²	2.5
Tightening torque of terminal screws		Nm	0.8


Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	40

Technical data ETIM 6.0

Device fitting		Universal
Additional equipment		-
Attached at delivery		No
Assembly width (TE)		0.5
Number of normally open contacts		0
Number of normally closed contacts		1
Number of change-over contacts		1
Number of fault-signal switches		0
Rated switch current	A	3
Nominal rated voltage	V	230
Control voltage type		AC
With autotest for earth leakage function		No
Suitable for max. number of poles main contact unit (total)		2
Suitable for max. current main contact unit	A	0

Dimensions

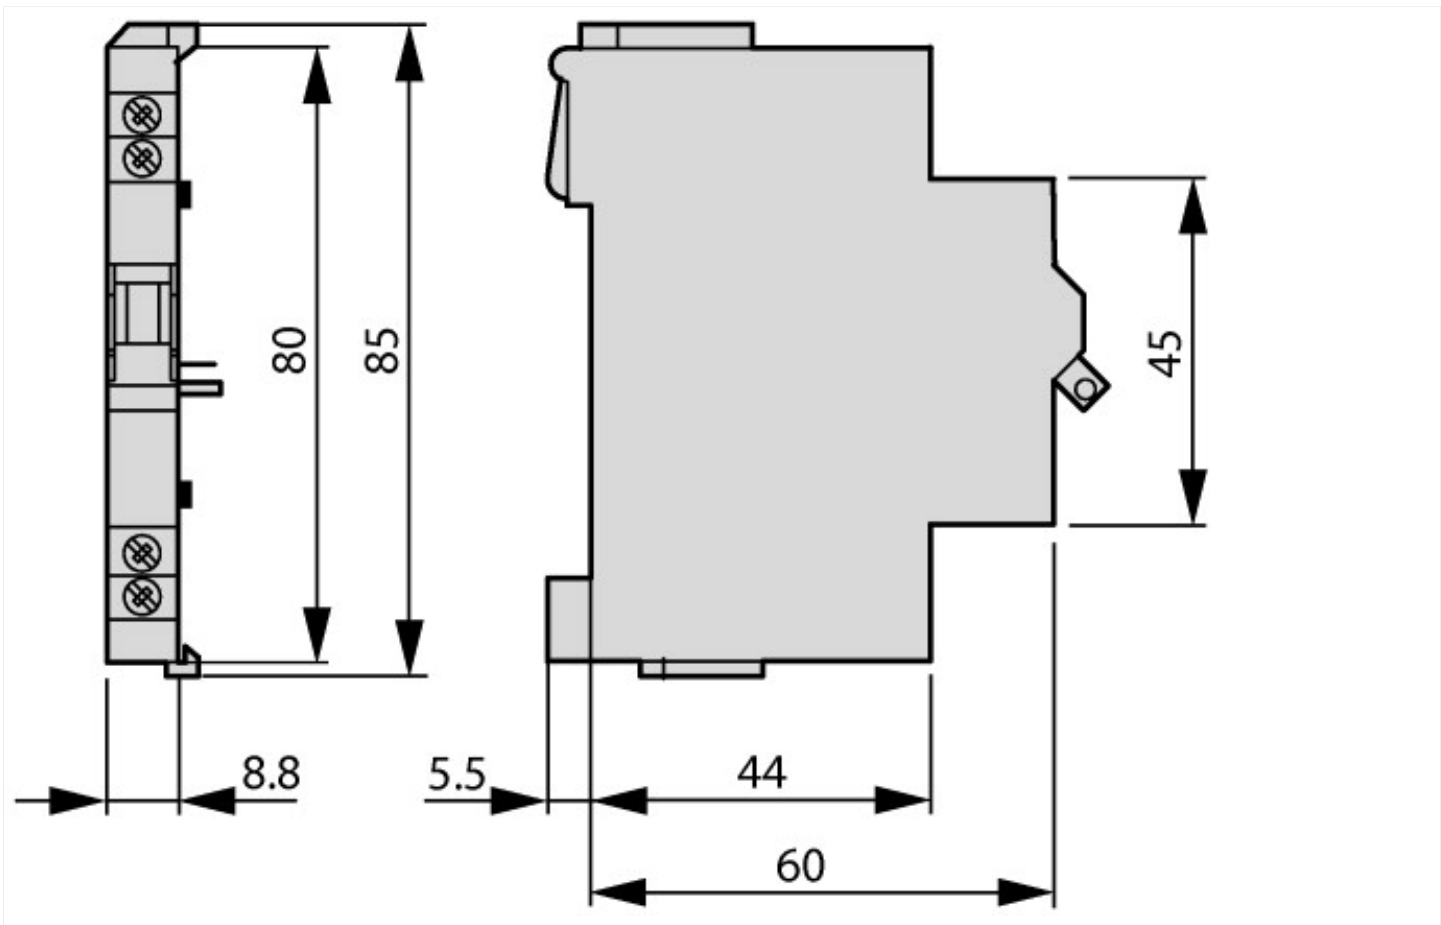

Additional product information (links)

AWA1290-1449 Residual-current circuit-breaker

AWA1290-1449 Residual-current circuit-breaker

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/14490702.pdf