



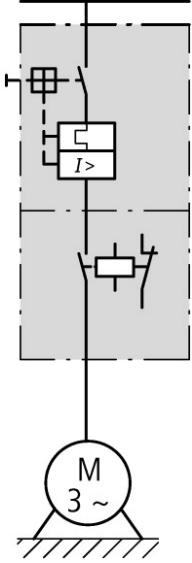


**DOL starter, 3p, 0.06-0.37kW/400V/AC3, 100kA, protection electronic, SmartWire-DT**



**Part no. MSC-DEA-1,2-M7(24VDC)**  
**Article no. 121753**  
**Catalog No. XTSEA1P2B007BTDNL**

## Delivery program

|   |          |    |  |   |
|---|----------|----|--|---|
| Basic function  |          |    |  | DOL starters (complete devices)   |
| Basic device  |          |    |  | MSC   |
|   |          |    |  |                                       |
| Notes   |          |    |  | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging. |
| Connection to SmartWire-DT  |          |    |  | with PKE-SWD-32 for connecting the motor-starter combination  |
| <b>Motor ratings</b>  |          |    |  |   |
| Motor rating  |          |    |  |   |
| AC-3  |          |    |  |   |
| 380 V 400 V 415 V   | P        | kW |  | 0.37  |
| Rated operational current   |          |    |  |   |
| AC-3  |          |    |  |   |
| 400 V   | $I_e$    | A  |  | 1.1   |
| Rated short-circuit current 380 - 400 V   | $I_q$    | kA |  | 100   |
| <b>Setting range</b>  |          |    |  |   |
| Setting range of overload releases  | $I_r$    | A  |  | 0.3 - 1.2   |
|  |          |    |  |   |
| Short-circuit releases  |          |    |  |   |
|  |          |    |  |   |
| Non-delayed   | $I_{rm}$ | A  |  | 186   |
|  |          |    |  |   |
| Coordination  |          |    |  | Type of coordination "1"  |
| Contact sequence  |          |    |  |                                     |

|   |                         |                         |
|---|-------------------------|-------------------------|
| Actuating voltage   |                         | 24 V DC                 |
|   |                         | DC Voltage              |
| <b>Motor-protective circuit-breakers PKE12/XTUA-1,2</b>   |                         |                         |
| Contactor DILM7-01(...)   |                         |                         |
| <b>DOL starter wiring set</b>   |                         |                         |
| Mechanical connection element and electrical electric contact module PKZM0-XDM32  |                         |                         |
| <b>Notes</b>  |                         |                         |
| The DOL starter (complete devices) consists of a PKE motor protective circuit breaker and a DILM contactor.   |                         |                         |
| With the adapter-less top-hat rail mounting of starters up to 15 A, only the motor-protective circuit-breaker on the top-hat rail requires an adapter.                            |                         |                         |
| The contactors are provided with mechanical support via a mechanical connection element.  |                         |                         |
| Control wire guide with max. 6 conductors up to 2.5°mm external diameter or 4 conductors up to 3.5°mm external diameter.  |                         |                         |
| From 16 A, the motor-protective circuit-breaker and contactor are mounted on the top-hat rail adapter plate.  |                         |                         |
| The connection of the main circuit between PKE and contactor is established with electrical contact modules.  |                         |                         |
| When using DILA-XHIT... auxiliary contacts with MSC-DE-... DOL starters, the plug-in electrical connectors can be removed without removing the front-mounted auxiliary contact.   |                         |                         |
| Cannot be combined with NHI-E...PKZ0-C.   |                         |                         |
| MSC-DEA... DOL starters are prepared for communications via SmartWire-DT. In order to be used this way, they first need to be expanded with the PKE-SWD-32 communications module. |                         |                         |
| Motor output/rated motor current  | Rated motor current     |                         |
| Motor rating  | AC-3                    |                         |
|   | 220 V                   | 380 V                   |
|   | 230 V                   | 400 V                   |
|   | 240 V                   |                         |
|   | I <sub>q</sub> = 100 kA | I <sub>q</sub> = 100 kA |
| P   | I                       | I                       |
| kW  | A                       | A                       |
| 0.06  | 0.37                    | -                       |
| 0.09  | 0.54                    | 0.31                    |
| 0.12  | 0.72                    | 0.41                    |
| 0.18  | 1.04                    | 0.6                     |
| 0.25  | -                       | 0.8                     |
| 0.37  | -                       | 1.1                     |
|   |                         | I <sub>q</sub> = 50 kA  |
|   |                         | I                       |
|   |                         | A                       |
|   |                         | -                       |
|   |                         | 0.31                    |
|   |                         | 0.41                    |
|   |                         | 0.6                     |
|   |                         | 0.8                     |
|   |                         | 1.1                     |

## Technical data

### General

|           |  |                            |
|-----------|--|----------------------------|
| Standards |  | IEC/EN 60947-4-1, VDE 0660 |
|-----------|--|----------------------------|

### Main conducting paths

|                                       |                  |      |           |
|---------------------------------------|------------------|------|-----------|
| Rated impulse withstand voltage       | U <sub>imp</sub> | V AC | 6000      |
| Overtoltage category/pollution degree |                  |      | III/3     |
| Rated operational voltage             | U <sub>e</sub>   | V    | 230 - 415 |
| Rated operational current             |                  |      |           |
| Open, 3-pole: 50 – 60 Hz              |                  |      |           |
| 380 V 400 V                           | I <sub>e</sub>   | A    | 1.2       |

### Additional technical data

|   |  |  |
|---|--|--|
| Motor protective circuit breaker PKZM0, PKE |  | PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/<br>PKZM0 product group<br>DILM contactors, see contactors product group<br>DILET timing relay, ETR, see contactors, electronic timing relays product group |
|---|--|--|

### Power consumption

|             |         |   |   |
|-------------|---------|---|---|
| DC operated | Sealing | W | 3 |
|-------------|---------|---|---|

## Design verification as per IEC/EN 61439

|  |                   |    |     |
|--|-------------------|----|-----|
| Technical data for design verification                   |                   |    |     |
| Rated operational current for specified heat dissipation | I <sub>n</sub>    | A  | 1.2 |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub>  | W  | 0.2 |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub>  | W  | 0.6 |
| Static heat dissipation, non-current-dependent           | P <sub>vs</sub>   | W  | 2.6 |
| Heat dissipation capacity                                | P <sub>diss</sub> | W  | 0   |
| Operating ambient temperature min.                       |                   | °C | -25 |
| Operating ambient temperature max.                       |                   | °C | 55  |
| IEC/EN 61439 design verification                         |                   |    |     |
| 10.2 Strength of materials and parts                     |                   |    |     |

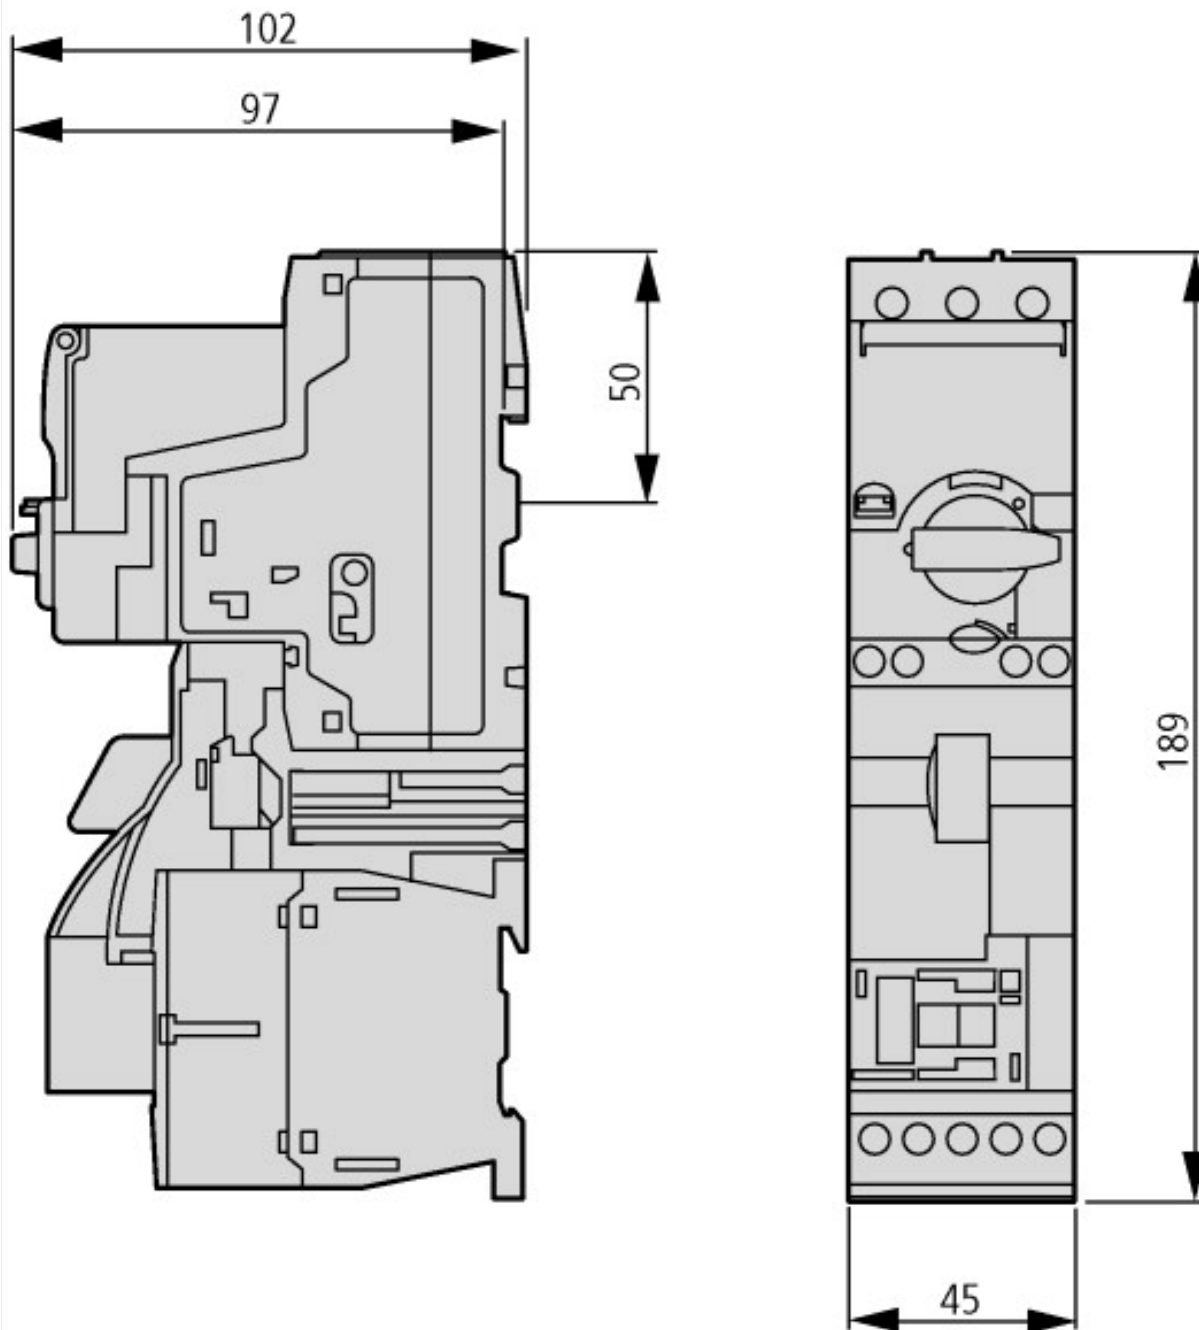
|  |  |  |
|--|--|--|
| 10.2.2 Corrosion resistance  |  | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 6.0

|   |    |                  |
|---|----|------------------|
| Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)   |    |                  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss8.1-27-37-09-05 [AJZ718010]) |    |                  |
| Kind of motor starter   |    | Direct starter   |
| With short-circuit release  |    | Yes              |
| Rated control supply voltage $U_s$ at AC 50HZ   | V  | 0 - 0            |
| Rated control supply voltage $U_s$ at AC 60HZ   | V  | 0 - 0            |
| Rated control supply voltage $U_s$ at DC  | V  | 24 - 24          |
| Voltage type for actuating  |    | DC               |
| Rated operation power at AC-3, 230 V, 3-phase   | kW | 0.18             |
| Rated operation power at AC-3, 400 V  | kW | 0.37             |
| Rated power, 460 V, 60 Hz, 3-phase  | kW | 0                |
| Rated power, 575 V, 60 Hz, 3-phase  | kW | 0                |
| Rated operation current $I_e$   | A  | 1.1              |
| Rated operation current at AC-3, 400 V  | A  | 1.2              |
| Overload release current setting  | A  | 0.3 - 1.2        |
| Rated conditional short-circuit current, type 1, 480 Y/277 V  | A  | 0                |
| Rated conditional short-circuit current, type 1, 600 Y/347 V  | A  | 0                |
| Rated conditional short-circuit current, type 2, 230 V  | A  | 0                |
| Rated conditional short-circuit current, type 2, 400 V  | A  | 0                |
| Number of auxiliary contacts as normally open contact   |    | 0                |
| Number of auxiliary contacts as normally closed contact   |    | 1                |
| Ambient temperature, , upper operating limit  | °C | 60               |
| Temperature compensated overload protection   |    | Yes              |
| Release class   |    | Adjustable       |
| Type of electrical connection of main circuit   |    | Screw connection |
| Type of electrical connection for auxiliary- and control current circuit  |    | Screw connection |
| Rail mounting possible  |    | Yes              |
| Degree of protection (IP)   |    | IP20             |

|   |  |  |     |
|---|--|--|-----|
| Supporting protocol for TCP/IP                      |  |  | No  |
| Supporting protocol for PROFIBUS                    |  |  | No  |
| Supporting protocol for CAN                         |  |  | No  |
| Supporting protocol for INTERBUS                    |  |  | No  |
| Supporting protocol for ASI                         |  |  | No  |
| Supporting protocol for MODBUS                      |  |  | No  |
| Supporting protocol for Data-Highway                |  |  | No  |
| Supporting protocol for DeviceNet                   |  |  | No  |
| Supporting protocol for SUCONET                     |  |  | No  |
| Supporting protocol for LON                         |  |  | No  |
| Supporting protocol for PROFINET IO                 |  |  | No  |
| Supporting protocol for PROFINET CBA                |  |  | No  |
| Supporting protocol for SERCOS                      |  |  | No  |
| Supporting protocol for Foundation Fieldbus         |  |  | No  |
| Supporting protocol for EtherNet/IP                 |  |  | No  |
| Supporting protocol for AS-Interface Safety at Work |  |  | No  |
| Supporting protocol for DeviceNet Safety            |  |  | No  |
| Supporting protocol for INTERBUS-Safety             |  |  | No  |
| Supporting protocol for PROFIsafe                   |  |  | No  |
| Supporting protocol for SafetyBUS p                 |  |  | No  |
| Supporting protocol for other bus systems           |  |  | Yes |

## Dimensions



MSC-DE(A)-...-M7[...12]...

## Additional product information (links)

**IL034014ZU (IL03402005Z) Direct-on-line starter up to 15 A**

IL034014ZU (IL03402005Z) Direct-on-line starter up to 15 A [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL034014ZU2013\\_11.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL034014ZU2013_11.pdf)

Moeller\_Online Selections Aids <http://www.moeller.net/en/support/slider/index.jsp>