



Undervoltage release, 24VDC +2early N/O

Part no. NZM1-XUHIV20LK24DC
Article no. 284401

Similar to illustration

Delivery program

Product range			Accessories
Accessories			Undervoltage release
Accessories			Undervoltage release with early-make auxiliary contact
Standard/Approval			UL/CSA, IEC
Construction size			NZM1
Description			Undervoltage release with 2 early-make auxiliary contacts, e.g., for early-make connection of undervoltage release in main switch applications, as well as for interlock and load shedding circuits. For use with emergency switching off devices in conjunction with Emergency switching off button. When the undervoltage release is de-energized, accidental contact with the main contacts of the switch during attempts to switch on is safely prevented. Early make of auxiliary contacts on switching on and off (manual operation): approx. 20 ms Cannot be used in conjunction with NZM...-XR... remote operator. Undervoltage releases cannot be installed simultaneously with NZM...-XHIV... early-make auxiliary contact or NZM...-XA... shunt release.
Connection type			Coil terminals with 3 m of loose connection cables Auxiliary contact terminals wired to terminal block
Auxiliary contacts			with two separate early-make auxiliary contacts
Rated control voltage	U_s	V	24 V DC
For use with			NZM1(-4), N(S)1(-4)

Technical data

Undervoltage release

Rated control voltage	U_s	V	
AC	U_s	V AC	24 - 600
DC	U_s	V DC	12 - 250
Rated control voltage	U_s	V	24 V DC
Operating range			
Drop-out voltage		$x U_s$	0.35 - 0.7
Pick-up voltage	$x U_c$		0.85 - 1.1
Power consumption			
AC			
Pick-up AC		VA	1.5
Sealing AC		VA	1.5
DC		$x U_s$	
Pick-up DC		W	0.8
Sealing DC		W	0.8
Maximum opening delay (response time until opening of the main contacts)		ms	19
Minimum command time		ms	10 - 15

Terminal capacities

Solid or flexible conductor, with ferrule		mm^2	1 x (0,75 - 2,5) 2 x (0,75 - 2,5)
		AWG	1 x (18 ... 14) 2 x (18 ... 14)

Design verification as per IEC/EN 61439

IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.

10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation		Meets the product standard's requirements.
10.2.5 Lifting		Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Under voltage coil (EC001022)		
Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Undervoltage trip (ecl@ss8.1-27-37-04-17 [AKF015010])		
Rated control supply voltage Us at AC 50HZ	V	0 - 0
Rated control supply voltage Us at AC 60HZ	V	0 - 0
Rated control supply voltage Us at DC	V	24 - 24
Voltage type for actuating		DC
Type of electric connection		Screw connection
Number of contacts as normally open contact		2
Number of contacts as normally closed contact		0
Number of contacts as change-over contact		0
Delayed		No
Suitable for power circuit breaker		Yes
Suitable for off-load switch		Yes
Suitable for motor safety switch		No
Suitable for overload relay		No

Approvals

Product Standards		UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking
UL File No.		E140305
UL Category Control No.		DIHS
CSA File No.		022086
CSA Class No.		1437-01
North America Certification		UL listed, CSA certified

Dimensions

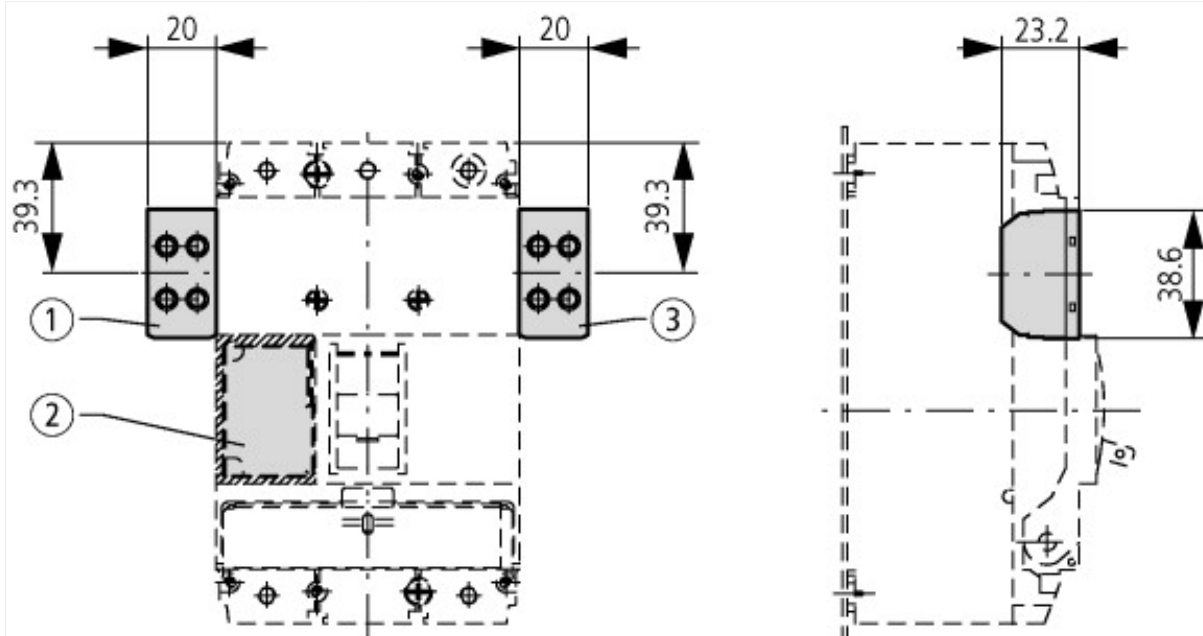

①

NZM1-XA(HIV)
NZM1-XU(HIV)(20)
NZM1-XHIV

②

NZM1-XA(HIV)(L)
NZM1-XU(V)(HIV)(L)(20)
NZM1-XHIV(L)

③

NZM1-XHIVR

Additional product information (links)

IL01203002Z (AWA1230-1914) Shunt release, Undervoltage release, Early-make auxiliary contact

IL01203002Z (AWA1230-1914) Shunt release,
Undervoltage release, Early-make auxiliary
contact

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01203002Z2010_11.pdf