

## On-Off switch, 3 pole, 25 A, service distribution board mounting

Powering Business Worldwide\*

Part no. P1-25/IVS Article no. 052962

### **Delivery program**

zomory program			
Product range			On-Off switch
Part group reference			P1
			with black thumb grip and front plate
Information about equipment supplied			Auxiliary contact or neutral conductor fitted by user.
Number of poles			3 pole
Auxiliary contacts			
\ <sup>1</sup>		N/0	0
7		N/C	0
Degree of Protection			Front IP30
Design			service distribution board mounting
Contact sequence			0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0
Front plate no.			FS 908
Motor rating AC-23A, 50 - 60 Hz			
400 V	Р	kW	11
Rated uninterrupted current	Iu	Α	25

# Technical data

General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +50
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Mechanical shock resistance		g	15
Mounting position			As required
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof

#### Contacts

Contacts			
Mechanical variables			
Number of poles			3 pole
Auxiliary contacts			
		N/0	0
		N/C	0
Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	l <sub>u</sub>	Α	25
Note on rated uninterrupted current !u			Rated uninterrupted current lu is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x l <sub>e</sub>	2
AB 40 % DF		x l <sub>e</sub>	1.6
AB 60 % DF		x l <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	25
	l	A go/gL A <sub>rms</sub>	640
	l <sub>cw</sub>	rms	
Note on rated short-time withstand current lcw	la.	LΛ	Current for a time of 1 second
Rated conditional short-circuit current  Switching capacity	Iq	kA	50
cos φ rated making capacity as per IEC 60947-3		Α	240
Rated breaking capacity cos φ to IEC 60947-3		Α	
230 V		Α	190
400/415 V		Α	150
500 V		Α	170
690 V		Α	150
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at l <sub>e</sub>			1.1
	Operations		>0.3
		x 10°	
	Operations/h		1200
AC			
AC-3	_		
	P	kW	
	P -	kW	5.5
	P		7.5
	P		7.5
	P	kW	7.5
Rated operational current motor load switch			100
	l <sub>e</sub>	Α	19.6
400V 415 V	l <sub>e</sub>	Α	15.2
500 V	l <sub>e</sub>	Α	12.1
690 V	l <sub>e</sub>	Α	8.8
AC-21A			
Rated operational current switch			
440 V	l <sub>e</sub>	Α	25
AC-23A			
Motor rating AC-23A, 50 - 60 Hz	Р	kW	
230 V	Р	kW	5.5
400 V 415 V	Р	kW	11
500 V	Р	kW	11
690 V	Р	kW	11
Rated operational current motor load switch			
230 V	l <sub>e</sub>	Α	25

Fault   Faul	
DC DC-1, Load-break switches L/R = 1 ms Rated operational current Voltage per contact pair in series V 60  DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 25 Contacts Quantity 1  48 V Rated operational current Ie A 25 Contacts Quantity 2  60 V Rated operational current Ie A 25 Contacts Quantity 2  120 V Rated operational current Ie A 12 Contacts Quantity 2  Control circuit reliability at 24 V DC, 10 mA Fault He < 10 -5 - 1 fault in 100000 operations	
DC  DC-1, Load-break switches L/R = 1 ms  Rated operational current  Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  Ie A 25  Contacts  Quantity 1  48 V  Rated operational current  Ie A 25  Contacts  Quantity 2  60 V  Rated operational current  Ie A 25  Contacts  Quantity 2  120 V  Rated operational current  Ie A 25  Quantity 2  120 V  Rated operational current  Ie A 25  Quantity 2  120 V  Rated operational current  Ie A 25  Quantity 2  120 V  Rated operational current  Ie A 12  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault HF 4 10 -5 4 1 fault in 100000 operations	
DC-1, Load-break switches L/R = 1 ms  Rated operational current  Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  Ie A 25  Contacts  Quantity 1  48 V  Rated operational current  Ie A 25  Contacts  Quantity 2  60 V  Rated operational current  Ie A 25  Contacts  Quantity 2  120 V  Rated operational current  Ie A 25  Contacts  Quantity 2  Contacts  Quantity 2  Contacts  Quantity 3  Contacts  Quantity 3	
Rated operational current  Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  Ie A 25  Contacts  Quantity 1  48 V  Rated operational current  Ie A 25  Contacts  Quantity 2  Rated operational current  Ie A 25  Contacts  Quantity 2  Rated operational current  Ie A 25  Contacts  Quantity 2  Rated operational current  Ie A 25  Contacts  Quantity 2  Rated operational current  Ie A 25  Contacts  Quantity 2  Contacts  Quantity 2  120 V  Rated operational current  Ie A 12  Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault H <sub>F</sub> < 10 -5 < 1 fault in 100000 operations	
Voltage per contact pair in series  DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  Ie A 25  Contacts  Quantity 1  48 V  Rated operational current  Ie A 25  Contacts  Quantity 2  60 V  Rated operational current  Ie A 25  Contacts  Quantity 2  120 V  Rated operational current  Ie A 25  Contacts  Quantity 2  120 V  Rated operational current  Ie A 25  Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault  Fault  He < 10 -5 < 1 fault in 100000 operations	
DC-23A, motor load switch L/R = 15 ms  24 V  Rated operational current  Ie A 25  Contacts  Quantity 1  48 V  Rated operational current  Ie A 25  Contacts  Quantity 2  60 V  Rated operational current  Ie A 25  Contacts  Quantity 2  120 V  Rated operational current  Ie A 25  Contacts  Quantity 2  Contacts  Quantity 2  Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA	
Rated operational current  Rated operational cur	
Rated operational current  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  Quantity  Contacts  Quantity  Rated operational current  Ie A 12  Contacts  Quantity  Rated operational current  Ie A 12  Contacts  Quantity  Rated operational current  Ie A 12  Contacts  Quantity  Rated operational current  Fault  Faul	
Contacts  Quantity 1  48 V  Rated operational current  Ie A 25  Contacts  Quantity 2  60 V  Rated operational current  Ie A 25  Contacts  Quantity 2  120 V  Rated operational current  Ie A 12  Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault  He < 10 -5 < 1 fault in 100000 operations	
A8 V Rated operational current  Ie A 25 Contacts Quantity Rated operational current Ie A 25 Contacts Quantity 2  120 V Rated operational current Ie A 12 Contacts Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault  Fault HF Contacts  Ie A 12 Contacts Cuantity 3	
Rated operational current    Ie	
Contacts  Quantity  Rated operational current  Ie A 25  Contacts  Quantity  2  120 V  Rated operational current  Ie A 12  Contacts  Quantity  3  Control circuit reliability at 24 V DC, 10 mA  Fault  He Contacts  Quantity  2	
Rated operational current  I <sub>e</sub> A 25 Contacts Quantity 120 V Rated operational current I <sub>e</sub> A 12 Contacts Quantity 3 Control circuit reliability at 24 V DC, 10 mA  Fault H <sub>F</sub> < 10 <sup>-5</sup> < 1 fault in 100000 operations	
Rated operational current  I e A 25  Contacts Quantity 2  120 V  Rated operational current I e A 12  Contacts Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault	
Contacts  Quantity  120 V  Rated operational current  I <sub>e</sub> A  12  Contacts  Quantity  3  Control circuit reliability at 24 V DC, 10 mA  Fault  Fault  HF  < 10 -5 < 1 fault in 100000 operations	
120 V   Rated operational current $I_{e}$ $A$ 12   Contacts   Quantity 3   Control circuit reliability at 24 V DC, 10 mA   Fault $H_{F}$ $< 10^{-5} < 1$ fault in 100000 operations	
Rated operational current  I e A 12  Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault HF < 10 -5 < 1 fault in 100000 operations	
Contacts  Quantity 3  Control circuit reliability at 24 V DC, 10 mA  Fault  Fault  HF  < 10 -5 < 1 fault in 100000 operations	
Control circuit reliability at 24 V DC, 10 mA  Fault H <sub>F</sub> < 10 <sup>-5</sup> < 1 fault in 100000 operations	
Control circuit reliability at 24 V DC, 10 mA Fault $H_F$ robability $< 10^{-5}$ , $< 1$ fault in 100000 operations	
Terminal capacities	
Solid or stranded $mm^2 1 \times (1.5 - 6)$	
2 x (1,5 - 6)	
Flexible with ferrules to DIN 46228 mm <sup>2</sup> 1 x (1 - 4) 2 x (1 - 4)	
Terminal screw M4	
Max. tightening torque Nm 1.6	
Technical safety parameters:	
Notes B10 <sub>d</sub> values as per EN ISO 13849-1, table C1	
Rating data for approved types	
Contacts	
Rated operational voltage U <sub>e</sub> V AC 600	
Rated uninterrupted current max.	
Main conducting paths	
General use I <sub>U</sub> A 20	
Auxiliary contacts	
General Use I <sub>U</sub> A 10	
Pilot Duty A 600	
P 600	
Switching capacity  Maying mater rating	
Maximum motor rating	
Single-phase	
120 V AC HP 1	
200 V AC	
Three-phase	
200 V AC HP 3	
240 V AC HP 5	
480 V AC HP 10	
600 V AC HP 15 Short Circuit Current Peting	
Short Circuit Current Rating SCCR	
Basic Rating kA 5	
max. Fuse A 110	
High fault rating kA 10 max. Fuse A 50, Class J	

Terminal capacity		
Solid or flexible conductor with ferrule	AWG	14 - 8
Terminal screw		M4
Tightening torque	lb-in	14.1

#### Design verification as per IEC/EN 61439

Design vernication as per 1EG/EN 01433			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	25
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	1.1
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### **Technical data ETIM 6.0**

Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)

Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss8.1-27-37-14-03 [AKF060010])


Version as main switch     No       Version as maintenance-/service switch     No       Version as safety switch     No       Version as emergency stop installation     No       Version as reversing switch     No       Version as reversing switch     No
Version as safety switch  Version as emergency stop installation  No
Version as emergency stop installation No
Version as reversing switch No
Max. rated operation voltage Ue AC V 690
Rated operating voltage V 690 - 690
Rated permanent current lu A 25
Rated permanent current at AC-21, 400 V A 25


kW	7.5
kA	0.64
kW	13
kW	13
kA	80
	3
	0
	0
	0
	No
	No
	No
	Built-in device fixed built-in technique
	No
	No
	No
	Yes
	No
	Black
	Toggle
	No
	Screw connection
	IP30
	kA kW kW

## Approvals

Product Standards	UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking
UL File No.	E36332
UL Category Control No.	NLRV
CSA File No.	12528
CSA Class No.	3211-05
North America Certification	UL listed, CSA certified
Suitable for	Branch circuits, suitable as motor disconnect
Degree of Protection	IEC: IP30; UL/CSA Type: –

## **Dimensions**

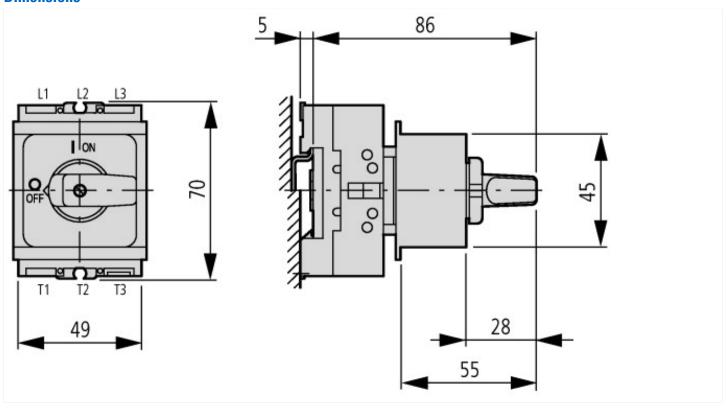

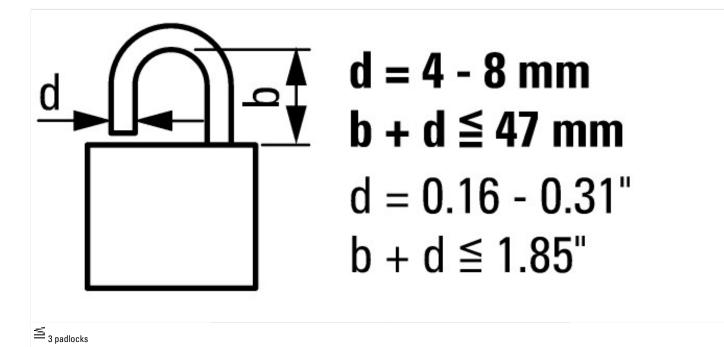

### **Additional product information (links)**

IL03802004Z (AWA1150-1891) Switch-Disconnectors for rear mounting		
IL03802004Z (AWA1150-1891) Switch- Disconnectors for rear mounting	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03802004Z2016_07.pdf	
Form for ordering non-standard front plates	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=4.87	
Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2	
System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4	
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6	
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8	
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8	
Switches for ATEX	http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html	