



Motor-protective circuit-breaker, 3p, I_r=1-1.6A, screw/spring clamp connection

Part no. PKZM0-1,6-SC
Article no. 229833
Catalog No. XTPRSC1P6BC1NL

Delivery program

| | | | | |
|--|-----------------|----|--|--|
| Product range | | | | PKZM0 motor protective circuit-breakers up to 32 A |
| Basic function | | | | Motor protection |
| | | | | |
| Notes | | | | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection technique | | | | Incoming side screw terminals outgoer side springloaded terminals |
| Max. motor rating | | | | |
| AC-3 | | | | |
| 220 V 230 V 240 V | P | kW | | 0.25 |
| 380 V 400 V 415 V | P | kW | | 0.55 |
| 440 V | P | kW | | 0.55 |
| 500 V | P | kW | | 0.75 |
| 660 V 690 V | P | kW | | 1.1 |
| Setting range | | | | |
| Overload releases | I _r | A | | 1 - 1.6 |
| | | | | |
| Short-circuit releases | | | | |
| | | | | |
| max. | I _{rm} | A | | 24.8 |
| Notes Phase failure sensitivity to IEC/EN 60947-4-1, VDE 0660 part 102. can be snapped-on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height | | | | |
| | | | | |
| PTB 10 ATEX 3013, observe Manual MN03402003Z-DE/EN | | | | |

Technical data


| | | | | |
|------------------------------|---|----|--|--|
| General | | | | |
| Standards | | | | IEC/EN 60947, VDE 0660 |
| Climatic proofing | | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | | | |
| Storage | θ | °C | | -40 - +80 |
| Open | | °C | | -25 - +55 |
| Enclosed | | °C | | - 25 - 40 |
| Mounting position | | | | |
| Direction of incoming supply | | | | as required |
| Degree of protection | | | | |
| Device | | | | IP20 |

| | | | |
|---|--|-----------------|--------------------------------------|
| Terminations | | | IP00 |
| Protection against direct contact | | | Finger and back-of-hand proof |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 | | g | 25 |
| Altitude | | m | 2000 |
| Terminal capacity screw terminals | | mm ² | |
| Solid | | mm ² | 1 x (1 - 6) 2 x (1 - 6) |
| Flexible with ferrule to DIN 46228 | | mm ² | 1 x (1 - 6) 2 x (1 - 6) |
| Solid or stranded | | AWG | 18 - 10 |
| Terminal capacity springloaded terminals | | | |
| Solid | | mm ² | 1 x (0.75...2.5) 2 x (0.75...2.5) |
| Flexible with ferrule to DIN 46228 | | mm ² | 1 x (0.75...2.5) 2 x (0.75...2.5) |
| Solid or stranded | | AWG | 18...14 |
| Specified tightening torque for terminal screws | | | |
| Main cable | | Nm | 1.7 |
| Control circuit cables | | Nm | 1 |

Main conducting paths

| | | | |
|---|-------------|---------------|--|
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated operational voltage | U_e | V AC | 690 |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A | 32 or current setting of the overcurrent release |
| Rated frequency | f | Hz | 40 - 60 |
| Rated frequency | | Hz | 40 - 60 |
| Current heat loss (3 pole at operating temperature) | | W | 6 |
| Lifespan, mechanical | Operations | $\times 10^6$ | 0.1 |
| Lifespan, electrical (AC-3 at 400 V) | Operations | $\times 10^6$ | 0.1 |
| Maximum operating frequency | | Ops/h | |
| Max. operating frequency | | Ops/h | 40 |
| Short-circuit rating | | | |
| DC | | | |
| Short-circuit rating | | kA | 60 |
| Short-circuit rating | | | 60 (up to PKZM0-16) 40 (PKZM0-20 to PKZM0-32) |
| Motor switching capacity | | kA_{rms} | |
| AC-3 (up to 690 V) | | A | 32 |
| DC-5 (up to 250 V) | | A | 25 (3 contacts in series) |

Trip blocks

| | | | |
|---|--|--------------|--|
| Temperature compensation | | | |
| to IEC/EN 60947, VDE 0660 | | °C | - 5 ... 40 |
| Operating range | | °C | - 25 ... 55 |
| Temperature compensation residual error for $T > 40$ °C | | |  0.25 %/K |
| Setting range of overload releases | | $\times I_u$ | 0.6 - 1 |
| Short-circuit release fixed | | $\times I_u$ | 15.5 |
| short-circuit release | | | Basic device, fixed: $15.5 \times I_u$ |
| Short-circuit release tolerance | | | $\pm 20\%$ |
| Phase-failure sensitivity | | | IEC/EN 60947-1-1, VDE 0660 Part 102 |

Design verification as per IEC/EN 61439

| | | | |
|--|-----------|---|------|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 1.6 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 5.36 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 0 |

| | | | |
|--|-------------------|----|--|
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 55 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


Technical data ETIM 6.0

| | | | |
|--|--|----|--|
| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074) | | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss8.1-27-37-04-01 [AGZ529013]) | | | |
| Overload release current setting | | A | 1 - 1.6 |
| Adjustment range undelayed short-circuit release | | A | 25 - 25 |
| Thermal protection | | | No |
| Phase failure sensitive | | | Yes |
| Switch off technique | | | Thermomagnetic |
| Rated operating voltage | | V | 690 - 690 |
| Rated permanent current I _u | | A | 1.6 |
| Rated operation power at AC-3, 230 V | | kW | 0.25 |
| Rated operation power at AC-3, 400 V | | kW | 0.55 |
| Type of electrical connection of main circuit | | | Screw connection |
| Type of control element | | | Turn button |
| Device construction | | | Built-in device fixed built-in technique |
| With integrated auxiliary switch | | | No |
| With integrated under voltage release | | | No |
| Number of poles | | | 3 |
| Rated short-circuit breaking capacity I _{cu} at 400 V, AC | | kA | 150 |
| Degree of protection (IP) | | | IP20 |
| Height | | mm | 93 |
| Width | | mm | 45 |
| Depth | | mm | 76 |

Approvals

| | |
|--------------------------------------|--|
| Product Standards | UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking |
| UL File No. | E36332 |
| UL Category Control No. | NLRV |
| CSA File No. | 165628 |
| CSA Class No. | 3211-05 |
| North America Certification | UL listed, CSA certified |
| Specially designed for North America | No |
| Suitable for | Branch circuit: Manual type E if used with terminal, or suitable for group installations |

Characteristics

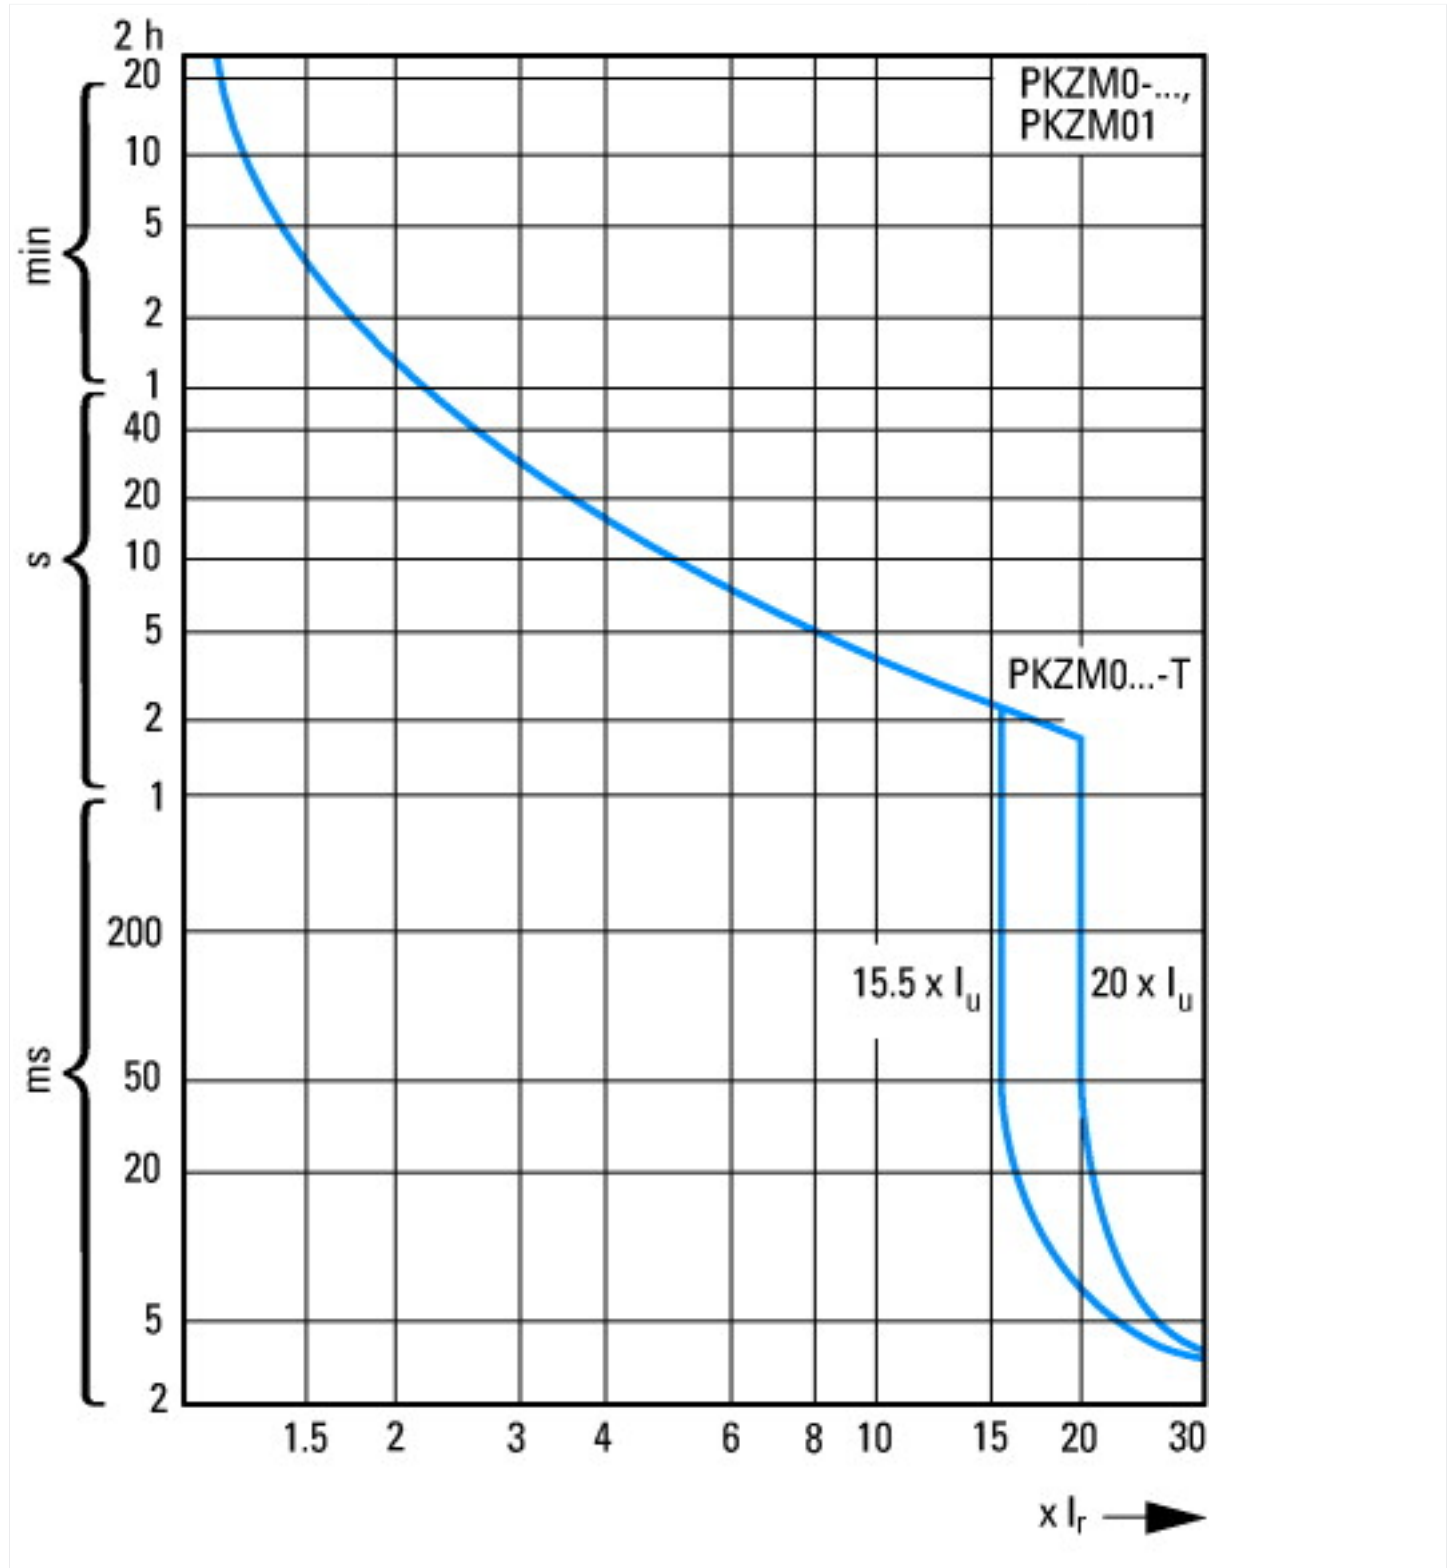

Motor-protective circuit-breaker tripping characteristic (high-capacity) compact starter, PKZM0-...T (not for PKM0-...), PKZM01




Let-through current




Let-through energy

Dimensions

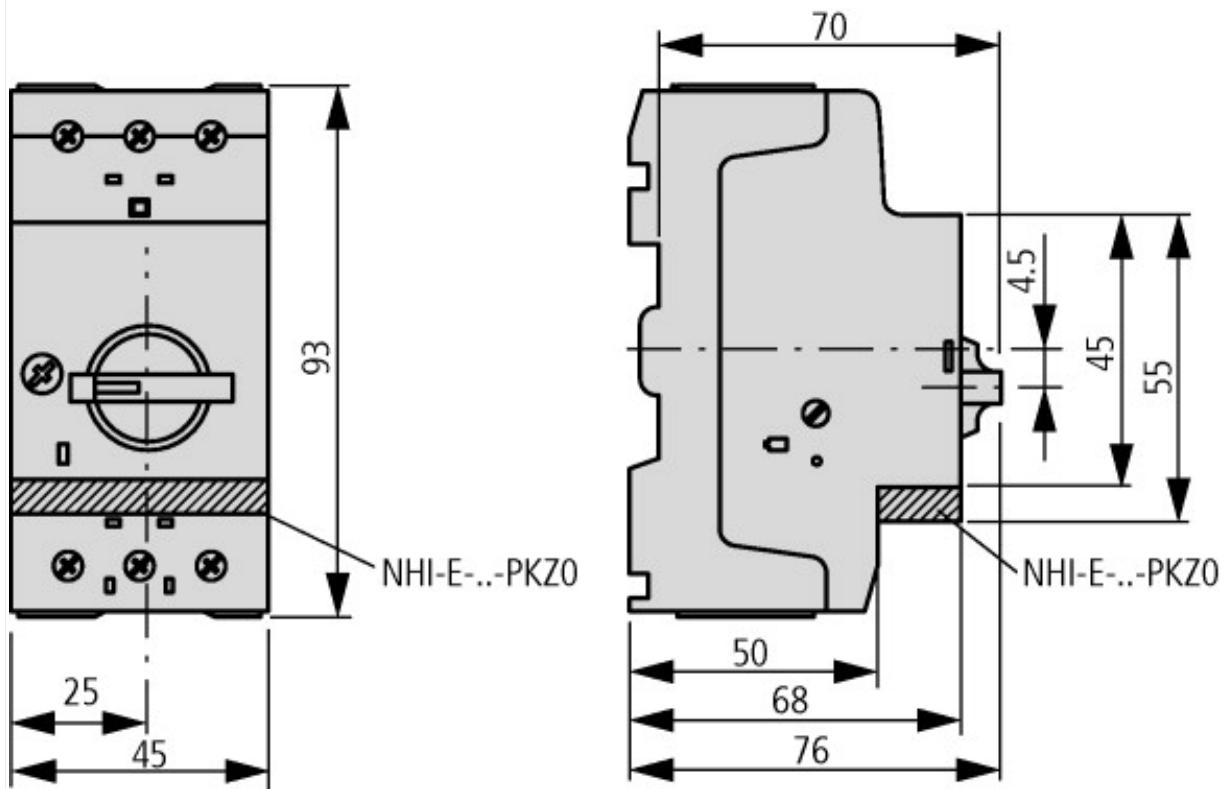

Motor-protective circuit-breaker with standard auxiliary contact
 PKZM0-...(+NHI-E-...-PKZ0)
 PKZM0-...-T(+NHI-E-...-PKZ0)
 PKM0-...(+NHI-E-...-PKZ0)

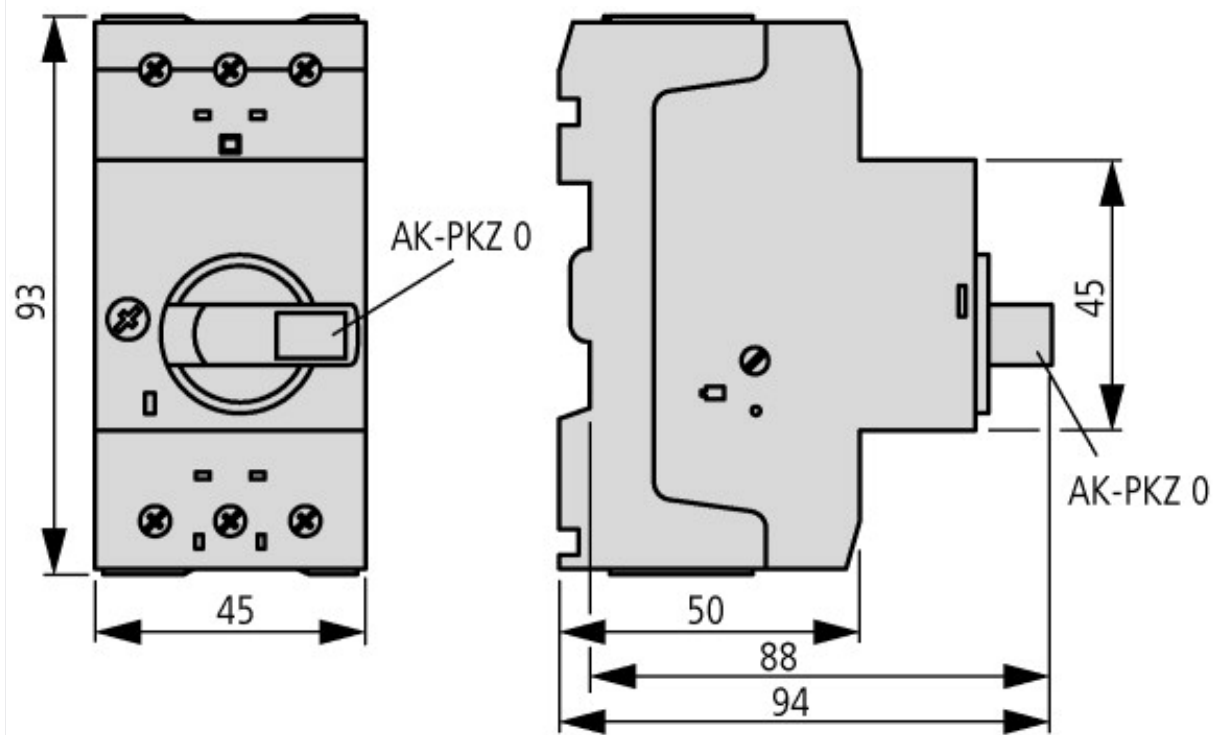

Motor-protective circuit-breakers with lockable rotary handles
 PKZM0-...+AK-PKZ0



Motor-protective circuit-breakers with early-make auxiliary contacts
PKZM0-...+VHI-...-PKZ0

Additional product information (links)

IL03407010Z (AWA1210-2138) Motor-protective circuit-breaker

IL03407010Z (AWA1210-2138) Motor-protective circuit-breaker ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407010Z2014_02.pdf

IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker

IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407011Z2014_02.pdf

MN03402003Z (AWB1210-1458) PKZM0 motor-protective circuit-breakers, overload monitoring of Ex e motors

MN03402003Z (AWB1210-1458) PKZM0 motor-protective circuit-breakers, overload monitoring of Ex e motors - Deutsch / English ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN03402003Z_DE_EN.pdf

Motor starters and "Special Purpose Ratings" for the North American market http://www.moeller.net/binary/ver_techpapers/ver953en.pdf

Busbar Component Adapters for modern Industrial control panels http://www.moeller.net/binary/ver_techpapers/ver960en.pdf