

### Non-standard switch, T3, 32 A, rear mounting, 5 contact unit(s)

Powering Business Worldwide<sup>™</sup>

T3-5-SOND\*/V/SVB Part no. Article no. 907895

110	IVACEL	nro	gram
UC	IIVEIV	/ UIU	Julaiii

Product range			Non-standard switch
Part group reference			T3
Stop Function			Emergency switching off function
			With red rotary handle and yellow locking ring
Notes			customized version according to form
Degree of Protection			Front IP65
Design			rear mounting
Motor rating AC-23A, 50 - 60 Hz			
400 V	P	kW	15
Rated uninterrupted current	I <sub>u</sub>	Α	32
Number of contact units		contact unit(s)	5

## **Technical data**

General			
Standards			IEC/EN 60947, VDE 0660, IEC/EN 60204 Switch-disconnector according to IEC/EN 60947-3
Climatic proofing			Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
Ambient temperature			
Open		°C	-25 - +50
Enclosed		°C	-25 - +40
Overvoltage category/pollution degree			III/3
Rated impulse withstand voltage	$U_{imp}$	V AC	6000
Mechanical shock resistance		g	15
Mounting position			As required
Protection against direct contact when actuated from front (EN 50274)			Finger and back-of-hand proof
Contacts			
Electrical characteristics			
Poted enerational voltage	11	VAC	600

Rated breaking capacity  $\cos \phi$  to IEC 60947-3

Electrical characteristics			
Rated operational voltage	U <sub>e</sub>	V AC	690
Rated uninterrupted current	I <sub>u</sub>	Α	32
Note on rated uninterrupted current $\mathbf{I}_{\mathbf{u}}$			Rated uninterrupted current lu is specified for max. cross-section.
Load rating with intermittent operation, class 12			
AB 25 % DF		x I <sub>e</sub>	2
AB 40 % DF		x I <sub>e</sub>	1.6
AB 60 % DF		x I <sub>e</sub>	1.3
Short-circuit rating			
Fuse		A gG/gL	35
Rated short-time withstand current (1 s current)	I <sub>cw</sub>	$A_{rms}$	650
Note on rated short-time withstand current lcw			Current for a time of 1 second
Rated conditional short-circuit current	Iq	kA	1
Switching capacity			
$\cos\phi$ rated making capacity as per IEC 60947-3		Α	320

230 V		Α	260
400/415 V		A	260
500 V		A	240
690 V		Α	170
Safe isolation to EN 61140			
between the contacts		V AC	440
Current heat loss per contact at I <sub>e</sub>		W	1.1
Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V)		CO	1.1
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	> 0.5
Maximum operating frequency	Operations/h		1200
AC			
AC-3			
Rating, motor load switch	Р	kW	
220 V 230 V	Р	kW	5.5
230 V Star-delta	Р	kW	7.5
400 V 415 V	P	kW	11
400 V Star-delta	Р	kW	15
500 V	P	kW	15
500 V Star-delta	P	kW	18.5
690 V	Р	kW	11
690 V Star-delta	Р	kW	22
Rated operational current motor load switch			
230 V	l <sub>e</sub>	Α	23.7
230 V star-delta	I <sub>e</sub>	Α	32
400V 415 V		A	23.7
	l <sub>e</sub>		
400 V star-delta	l <sub>e</sub>	Α	32
500 V	I <sub>e</sub>	Α	23.7
500 V star-delta	l <sub>e</sub>	Α	32
690 V	l <sub>e</sub>	Α	14.7
690 V star-delta	l <sub>e</sub>	Α	25.5
AC-21A			
Rated operational current switch			
440 V	I <sub>e</sub>	Α	32
AC-23A			
Motor rating AC-23A, 50 - 60 Hz	Р	kW	
230 V	P	kW	7.5
400 V 415 V	Р	kW	15
500 V	Р	kW	15
690 V	Р	kW	15
Rated operational current motor load switch			
230 V	l <sub>e</sub>	Α	32
400 V 415 V	I <sub>e</sub>	Α	32
500 V	I <sub>e</sub>	A	26.4
690 V	I <sub>e</sub>	A	17
	·e	^	··
DC			
DC-1, Load-break switches L/R = 1 ms		۸	25
Rated operational current	l <sub>e</sub>	A	25
Voltage per contact pair in series		V	60
DC-21A	l <sub>e</sub>	Α	
Rated operational current	l <sub>e</sub>	Α	1
Contacts		Quantity	1
DC-23A, motor load switch L/R = 15 ms			
24 V			
Rated operational current	l <sub>e</sub>	Α	25

2/5

Contacts		Quantity	1
48 V			
Rated operational current	Ie	Α	25
Contacts		Quantity	2
60 V			
Rated operational current	le	Α	25
Contacts		Quantity	3
120 V			
Rated operational current	Ie	Α	12
Contacts		Quantity	3
240 V			
Rated operational current	I <sub>e</sub>	Α	5
Contacts		Quantity	5
DC-13, Control switches L/R = 50 ms			
Rated operational current	I <sub>e</sub>	Α	20
Voltage per contact pair in series		٧	24
Control circuit reliability at 24 V DC, 10 mA	Fault probability	H <sub>F</sub>	< 10 <sup>-5</sup> , < 1 fault in 100000 operations
Terminal capacities			
Solid or stranded		mm <sup>2</sup>	1 x (1 - 6) 2 x (1 - 6)
Flexible with ferrules to DIN 46228		mm <sup>2</sup>	1 x (0.75 - 4) 2 x (0.75 - 4)
Terminal screw			M4
Max. tightening torque		Nm	1.6
Technical safety parameters:			
Notes			B10 <sub>d</sub> values as per EN ISO 13849-1, table C1
Rating data for approved types			
Terminal capacity			

M4

# **Design verification as per IEC/EN 61439**

Terminal screw

Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	32
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	1.1
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	50
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects $$			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Please enquire
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.

10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


# **Technical data ETIM 6.0**

Low-voltage industrial components (EG000017) / Switch disconnector (EC000216)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnector (ecl@ss8.1-27-37-14-03 [AKF060010])

Version as main switch			Yes
Version as maintenance-/service switch			Yes
Version as safety switch			No
Version as emergency stop installation			No
Version as reversing switch			No
Max. rated operation voltage Ue AC	V	V	690
Rated operating voltage	V	V	690 - 690
Rated permanent current lu	Δ	A	32
Rated permanent current at AC-21, 400 V	Δ	A	32
Rated operation power at AC-3, 400 V	k	kW	11
Rated short-time withstand current lcw	k	kA	0.65
Rated operation power at AC-23, 400 V	k	kW	15
Switching power at 400 V	k	kW	15
Conditioned rated short-circuit current Iq	k	kA	1
Number of poles			0
Number of auxiliary contacts as normally closed contact			0
Number of auxiliary contacts as normally open contact			0
Number of auxiliary contacts as change-over contact			0
Motor drive optional			No
Motor drive integrated			No
Voltage release optional			No
Device construction			Built-in device fixed built-in technique
Suitable for ground mounting			Yes
Suitable for front mounting 4-hole			No
Suitable for front mounting center			No
Suitable for distribution board installation			No
Suitable for intermediate mounting			Yes
Colour control element			Red
Type of control element			Door coupling rotary drive
Interlockable			Yes
Type of electrical connection of main circuit			Screw connection
Degree of protection (IP), front side			IP65

## **Dimensions**

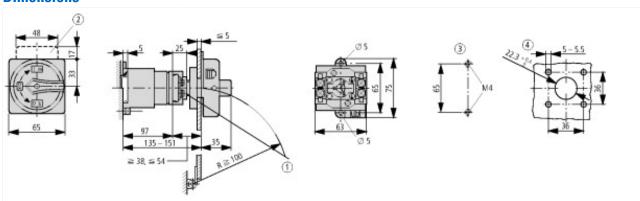

- Shaft and interlock extension with ZAV-P3 + ZVV-P3 possible; max. 4 x 25 = 100 mm
- 2 ZFS-... Label mount not included as standard
- 3 Drilling dimensions base
- 4 Drilling dimensions door



d = 4 - 8 mm  $b + d \leq 47 \text{ mm}$  d = 0.16 - 0.31 d = 4 - 8 mm d = 4 - 8 mm

≦ 3 padlocks

### **Additional product information (links)**

The state of the s				
IL03801021Z (AWA1150-0587) Cam switch: Rear mounting				
IL03801021Z (AWA1150-0587) Cam switch: Rear mounting	ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801021Z2016_07.pdf			
Form for ordering non-standard switches	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=4.84			
Form for ordering non-standard front plates	http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=4.87			
Technical overview cam switch, switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.2			
System overview cam switch T	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.4			
System overview switch-disconnector P	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.6			
Key to part numbers Cam switch	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8			
Key to part numbers Switch-disconnector	http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&startpage=4.8			
Switches for ATEX	http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html			