

ZEB32-20 Article no. 136488 Catalog No. XTOE020CCS

Part no.



Delivery program

Product range			Electronic overload relays ZEB
Phase-failure sensitivity			IEC/EN 60947, VDE 0660 Part 102
Description			Test/off button Reset pushbutton Manual/auto reset selectable Protection with heavy starting duty (Class 10A-30)
Mounting type			Direct mounting
Earth-fault protection			
Earth-fault protection			none
Setting range			
Overload releases	I _r	A	4 - 20
Contact sequence			$ \begin{array}{c} \begin{array}{c} \begin{array}{c} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \\ \end{array} \\ \begin{array}{c} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \\ \end{array} \\ \begin{array}{c} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \\ \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \\ \end{array} \\ $
Auxiliary contacts			
N/O = Normally open			1 N/O
N/C = Normally closed			1 N/C
For use with			DILM17 DILM25 DILM32 DILM38 DIULM37 DIULM25 DIULM32 SDAINLM30 SDAINLM45 SDAINLM55

Technical data

		IEC/EN 60947, VDE 0660, UL, CSA
		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30
	°C	-25 - +65
	°C	65
	g	15 Shock duration 10 ms according to IEC 60068-2-27
		IP20
		Finger and back-of-hand proof
U _{imp}	V AC	6000
		III/3
Ui	V AC	690
Ue	V AC	690
f	Hz	50/60
	V AC	600
	V AC	600
	mm ²	
	Ui	 °C g Jimp VAC Uimp VAC Ui VAC Ue VAC

Solid		mm ²	1 x 1.5 - 16
Solid or stranded		AWG	1 x 14 - 4
Auxiliary and control circuits		AVVG	1 X 14 - 4
Rated impulse withstand voltage	U _{imp}	V	6000
Overvoltage category/pollution degree			111/3
Terminal capacities		mm ²	
Solid		mm ²	2 × (0.75 - 4)
Flexible with ferrule		mm ²	2 x (0.75 - 2.5)
Solid or stranded		AWG	2 x (18 - 12)
Terminal screw			M3.5
Tightening torque		Nm	0.8 - 1.2
Tightening torque		lb-in	7
Tools			
Pozidriv screwdriver		Size	2
Standard screwdriver		mm	1×6
Rated insulation voltage	Ui	V AC	500
Rated operational voltage	U _e	V AC	500
Safe isolation to EN 61140			
between the auxiliary contacts		V AC	240
Conventional thermal current	I _{th}	А	5
Rated operational current	۱ _e	А	
AC-15			
Make contact			
120 V	۱ _e	А	1.5
220 V 230 V 240 V	Ι _e	А	1.5
380 V 400 V 415 V	Ι _e	А	0.5
500 V	۱ _e	А	0.5
Break contact			
120 V	۱ _e	А	1.5
220 V 230 V 240 V	۱ _e	А	1.5
380 V 400 V 415 V	۱ _e	А	0.9
500 V	۱ _e	A	0.8
DC-13 L/R - 15 ms			
24 V	I _e	A	0.9
60 V	I _e	A	0.75
110 V	۱ _e	A	0.4
220 V	I _e	A	0.2
Short-circuit rating without welding			
max. fuse		A gG/gL	6

Design verification as per IEC/EN 61439

.			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	А	20
Heat dissipation per pole, current-dependent	P _{vid}	W	0.77
Equipment heat dissipation, current-dependent	P _{vid}	W	2.3
Static heat dissipation, non-current-dependent	P _{vs}	W	0
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	65
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.

In2.3.2 Verification of resistance of insulating materials to normal heat and fire due to internal electric effectsMeets the product standard's requirements.In2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effectsMeets the product standard's requirements.In2.4 Resistance to ultra-violet (UV) radiationMeets the product standard's requirements.In2.5 LiftingDes not apply, since the entire switchgear needs to be evaluated.In2.5 LiftingDes not apply, since the entire switchgear needs to be evaluated.In2.5 LiftingDes not apply, since the entire switchgear needs to be evaluated.In2.5 LiftingDes not apply, since the entire switchgear needs to be evaluated.In2.5 LiftingDes not apply, since the entire switchgear needs to be evaluated.In2.5 LiftingDes not apply, since the entire switchgear needs to be evaluated.In2.6 Lictures and creepage distancesDes not apply, since the entire switchgear needs to be evaluated.In5.6 Incorporation of switching devices and componentsDes not apply, since the entire switchgear needs to be evaluated.In5.8 Incorporation of switching devices and componentsIn5.4 panel builder's responsibility.In5.9 Power-frequency electric strengthIn5.4 panel builder's responsibility.		
and fire due to internal electric effectsand fire due to internal elect	10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.5 Lifting Dees not apply, since the entire switchgear needs to be evaluated. 10.2.5 Lifting Dees not apply, since the entire switchgear needs to be evaluated. 10.2.7 Inscriptions Dees not apply, since the entire switchgear needs to be evaluated. 10.3.7 Inscriptions Dees not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Dees not apply, since the entire switchgear needs to be evaluated. 10.5 Protection against electric shock Dees not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Dees not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Dees not apply, since the entire switchgear needs to be evaluated. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Inpulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder is responsibility. The specifications for the switchgear must be shoreved. 10.12 Electromagnetic compatibility. Is the panel builder is responsibility. The specifications for the switchgear must be shoreved.	0	Meets the product standard's requirements.
10.2.6 Mechanical impactDoes not apply, since the entire switchgear needs to be evaluated.10.2.7 InscriptionsNeets the product standard's requirements.10.3 Degree of protection of ASSEMBLIESDoes not apply, since the entire switchgear needs to be evaluated.10.4 Clearances and creepage distancesNeets the product standard's requirements.10.5 Protection against electric shockDoes not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9.1 Power-frequency electric strengthIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.1 Tomperature riseIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.7 Inscriptions Meets the product standard's requirements. 10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Does not apply, since the entire switchgear needs to be evaluated. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise The panel builder is responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.3 Degree of protection of ASSEMBLIES Poes not apply, since the entire switchgear needs to be evaluated. 10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Does not apply, since the entire switchgear needs to be evaluated. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility. Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility. Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances Meets the product standard's requirements. 10.5 Protection against electric shock Does not apply, since the entire switchgear needs to be evaluated. 10.6 Incorporation of switching devices and components Meets the panel builder's responsibility. 10.7 Internal electrical circuits and connections Is the panel builder's responsibility. 10.8 Connections for external conductors Is the panel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Inpulse withstand voltage Is the panel builder's responsibility. 10.9.1 response for enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Is the panel builder's responsibility. 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.2.7 Inscriptions	Meets the product standard's requirements.
10.5 Protection against electric shockDees not apply, since the entire switchgear needs to be evaluated.10.6 Incorporation of switching devices and componentsDees not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and componentsDoes not apply, since the entire switchgear needs to be evaluated.10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.7 Internal electrical circuits and connectionsIs the panel builder's responsibility.10.8 Connections for external conductorsIs the panel builder's responsibility.10.9 Insulation propertiesIs the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder is responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.8 Connections for external conductors 10.8 Connections for external conductors 10 step anel builder's responsibility. 10.9 Insulation properties Is the panel builder's responsibility. 10.9.2 Power-frequency electric strength Is the panel builder's responsibility. 10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise The panel builder is responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.9 Insulation propertiesImage: Properties of the panel builder's responsibility.10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Impulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.9.2 Power-frequency electric strengthIs the panel builder's responsibility.10.9.3 Inpulse withstand voltageIs the panel builder's responsibility.10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder's responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage Is the panel builder's responsibility. 10.9.4 Testing of enclosures made of insulating material Is the panel builder's responsibility. 10.10 Temperature rise Impulse withstand with stand	10.9 Insulation properties	
10.9.4 Testing of enclosures made of insulating materialIs the panel builder's responsibility.10.10 Temperature riseIs the panel builder is responsibility.10.11 Short-circuit ratingIs the panel builder's responsibility. The specifications for the switchgear must be observed.10.12 Electromagnetic compatibilityIs the panel builder's responsibility. The specifications for the switchgear must be observed.	10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.10 Temperature rise Image: Comparison of the temperature rise calculation. Eaton will provide heat dissipation data for the devices. 10.11 Short-circuit rating Image: Compatibility of the temperature rise calculation. Eaton will provide heat dissipation data for the devices. 10.12 Electromagnetic compatibility Image: Compatibility of the temperature rise calculation. Eaton will provide heat dissipation data for the devices. 10.12 Electromagnetic compatibility Image: Compatibility of the temperature rise calculation. Eaton will observed.	10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
Instruction Instruction Instruction 10.11 Short-circuit rating Is the panel builder's responsibility. The specifications for the switchgear must be observed. 10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.12 Electromagnetic compatibility Is the panel builder's responsibility. The specifications for the switchgear must be observed.	10.10 Temperature rise	
observed.	10.11 Short-circuit rating	
	10.12 Electromagnetic compatibility	
10.13 Mechanical function I he device meets the requirements, provided the information in the instruction leaflet (IL) is observed.	10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Electronic overload relay (EC001080)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Overload protection device / Electronic overload relay (ecl@ss8.1-27-37-15-02 [AKF076011])

Adjustable current range	А	4 - 20
Mounting method		Direct attachment
Type of electrical connection of main circuit		Screw connection
Number of auxiliary contacts as normally closed contact		1
Number of auxiliary contacts as normally open contact		1
Number of auxiliary contacts as change-over contact		0
Rated control supply voltage Us at AC 50HZ	V	0 - 0
Rated control supply voltage Us at AC 60HZ	V	0 - 0
Rated control supply voltage Us at DC	V	0 - 0
Release class		Adjustable
Voltage type for actuating		Selfsupplied

Approvals

UL File No.E1230UL Category Control No.NKCRCSA File No.2290956CSA Class No.3211-03North America CertificationMCRSpecially designed for North AmericaMoSuitable forSectorSuitable forSectorState State St		
UL Category Control No.KCRCSA File No.290956CSA Class No.211-03North America CertificationUL listed, CSA certifiedSpecially designed for North AmericaMoSuitable forFace and a certificationMax. Voltage RatingGold A certified	Product Standards	UL 508; CSA-C22.2 No. 14; IEC/EN 60947-4-1; CE marking
CSA File No. 2200956 CSA Class No. 3211-03 North America Certification UL listed, CSA certified Specially designed for North America No Suitable for Branch circuits Max. Voltage Rating Goot VAC	UL File No.	E1230
CSA Class No. 3211-03 North America Certification UL listed, CSA certified Specially designed for North America No Suitable for Franch circuits Max. Voltage Rating Image: Special Content of C	UL Category Control No.	NKCR
North America Certification UL listed, CSA certified Specially designed for North America No Suitable for Franch circuits Max. Voltage Rating Goo V AC	CSA File No.	2290956
Specially designed for North America No Suitable for Image: Special Spe	CSA Class No.	3211-03
Suitable for Branch circuits Max. Voltage Rating C	North America Certification	UL listed, CSA certified
Max. Voltage Rating 600 V AC	Specially designed for North America	No
	Suitable for	Branch circuits
Degree of Protection IEC: IP20, UL/CSA Type: -	Max. Voltage Rating	600 V AC
	Degree of Protection	IEC: IP20, UL/CSA Type: -



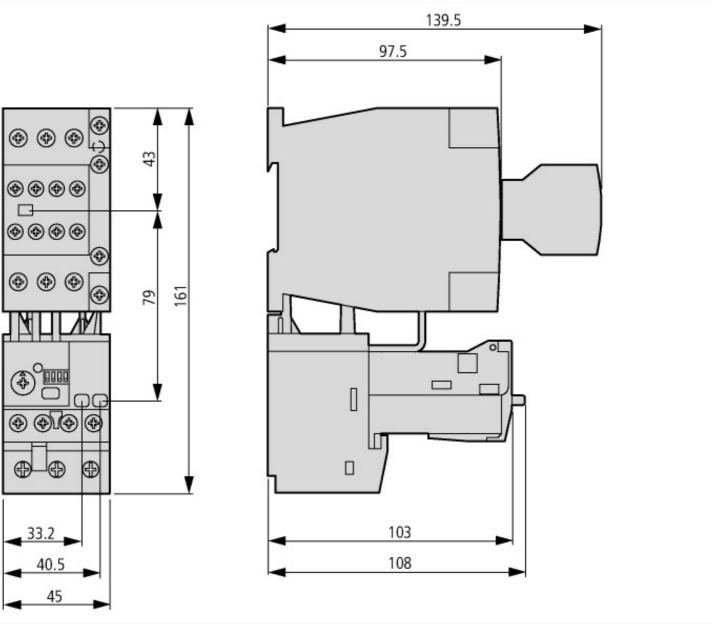

Additional product information (links)

IL04210002E Solid-state motor protection relay

IL04210002E Solid-state motor protection relay ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04210002E2012_06.pdf