



DOL starter 9A, SWD

Part no.

EMS-D0-T-9-SWD

Article no.

170107

Catalog No.

EMS-D0-T-9-SWD



Powering Business Worldwide™



Delivery program

Product range			Electronic motor starter
Product range			SmartWire-DT slave
Subrange			SmartWire-DT electronic motor starters
Basic function			DOL starters (complete devices)
Function			For connecting to SmartWire-DT for expanded diagnostics.
Description			DOL starting Motor protection Circuit design: safety output stage with bypass, three-phase disconnect. Motor current additionally adjustable via SmartWire-DT.
Messages			Operational readiness Operating direction feedback Motor current in % Motor current in A Thermal motor image in % Overload prewarning Trip indications (overload, phase failure, etc.) Set short-circuit release value Device Type
Commands			Operating the motor starter Manual reset Automatic reset

Motor ratings

Max. rating for three-phase motors, 50 - 60 Hz			
AC-53a			
380 V 400 V 415 V	P	kW	0.55 - 3
Setting range of overload releases	I _r	A _x	1,5 - 7 (AC-53a) 9 (AC-51)
Actuating voltage			24 V DC
Connection technique			Push in terminals
Connection to SmartWire-DT			yes

Technical data

General

Standards			IEC/EN 60947-4-2
Dimensions			
Width		mm	30
Height		mm	157
Depth		mm	124
Weight		kg	0.3
Mounting			Top-hat rail IEC/EN 60715, 35 mm
Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20
Mounting position			Vertical
Lifespan, electrical	Operations		3 × 10 ⁷
Max. switching frequency		Operations/h	3/200 (pulse pause time 50:50)
Terminal capacity			
Solid		mm ²	1 x (0.2 - 2.5) 1 x AWG20 - 14
flexible, with ferrule		mm ²	2 x (0.2 - 2.5)

			1 x AWG24 - 14
Notes			Minimum length 10 mm.
flexible, with twin ferrule		mm ²	2 x (0,2 - 1,5) 2 x AWG24 - 16
Notes			Minimum length 10 mm.

Climatic environmental conditions

Operating ambient temperature		°C	-5 - +60, in accordance with IEC 60068-2-1
Storage	θ	°C	-40 - +80

Main conducting paths

Rated impulse withstand voltage	U _{imp}	V AC	6000
Overvoltage category/pollution degree			III/2
Rated operational voltage	U _e	V	42 - 550
Rated operational current			
AC-51	I _e	A	1.20 - 9
AC-53a	I _e	A	1.20 - 7
Heat dissipation	P _V	W	1 - 12
Static heat dissipation, non-current-dependent	P _{vs}	W	1
Basic insulation to IEC/EN60947-1			
Between supply, control, and switching voltages		V AC	500
between feedback signal output and switch voltage		V AC	500
Current measurement			
Setting range of overload releases	I _r	A_x	1,5 - 7 (AC-53a) 9 (AC-51)
Release class		CLASS	10 (I _r ≤ 4 A) 10A (I _r > 4 A)
Recovery time	t _W	min.	2 (manual startup) 20 (automatic restart)
Balance monitoring			
Magnitude I _{max} > I _{rated} ((I _{max} - I _{min})/I _{max})		%	If \geq 33, pick-up time of 120 s If \geq 67, pick-up time of 1.8 s
Magnitude I _{max} < I _{rated} ((I _{max} - I _{min})/I _{rated})		%	If \geq 33, pick-up time of 120 s If \geq 67, pick-up time of 1.8 s
Stall protection			
Pick-up time I (L1) or I (L3)		A	60
Pick-up time		S	0.5
Short-circuit rating			
Type “1” coordination			
Short-circuit protective device			50 kA, 500 V AC: Fuse 16 A gG/gL 50 kA, 500 V AC: fuse 30 A CCMR 50 kA, 415 V AC: PKM0-4 15 kA, 415 V AC: PKM0-6,3 2.5 kA, 400 V AC: FAZ-B16/3

Control section

Input data			
Supply voltage	U _{AUX}	V DC	24 (-15 - +20 %)
Residual ripple on the input voltage		%	\leq 5
Input current		mA	70
Current draw inrush	U _{AUX}	mA	120
Current draw (operation)	U _{AUX}	mA	50

Electromagnetic compatibility (EMC)

Electrostatic discharge (ESD)			
applied standard			IEC EN 61000-4-2, Level 3
Air discharge		kV	8
Contact discharge		kV	6
Electromagnetic fields (RFI)			
applied standard			IEC/EN 61000-4-3
		V/m	800 - 1000 MHz: 10 1.4 - 2 GHz: 10

		2.0 - 2.7 GHz: 3
Radio interference suppression		EN 55011, Class A (emitted interference, line-conducted) EN 61000-6-3, Class A (emitted interference, radiated)
Note on use		This product is designed for operation in industrial environments (environment 2). The use in residential environments (environment 1) could cause electrical interference so that addition suppression must be planned.
Burst	kV	2 IEC/EN 61000-4-4, level 3
power pulses (Surge)		1 kV (symmetrical) 2 kV (asymmetrical) according to IEC/EN 61000-4-5
Immunity to line-conducted interference to (IEC/EN 61000-4-6)	V	10

Design verification as per IEC/EN 61439


Technical data for design verification			
Rated operational current for specified heat dissipation	I _n	A	6.5
Heat dissipation per pole, current-dependent	P _{vid}	W	2.1
Equipment heat dissipation, current-dependent	P _{vid}	W	6.3
Static heat dissipation, non-current-dependent	P _{vs}	W	1
Heat dissipation capacity	P _{diss}	W	0
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss8.1-27-37-09-05 [AJZ718010])			
Kind of motor starter			Direct starter
With short-circuit release			No
Rated control supply voltage U _s at AC 50HZ		V	0 - 0
Rated control supply voltage U _s at AC 60HZ		V	0 - 0


Rated control supply voltage U_s at DC	V	24 - 24
Voltage type for actuating		DC
Rated operation power at AC-3, 230 V, 3-phase	kW	1.5
Rated operation power at AC-3, 400 V	kW	3
Rated power, 460 V, 60 Hz, 3-phase	kW	2.2
Rated power, 575 V, 60 Hz, 3-phase	kW	0
Rated operation current I_e	A	9
Rated operation current at AC-3, 400 V	A	7
Overload release current setting	A	1.5 - 9
Rated conditional short-circuit current, type 1, 480 Y/277 V	A	0
Rated conditional short-circuit current, type 1, 600 Y/347 V	A	0
Rated conditional short-circuit current, type 2, 230 V	A	0
Rated conditional short-circuit current, type 2, 400 V	A	0
Number of auxiliary contacts as normally open contact		0
Number of auxiliary contacts as normally closed contact		0
Ambient temperature, , upper operating limit	°C	40
Temperature compensated overload protection		Yes
Release class		CLASS 10
Type of electrical connection of main circuit		Spring clamp connection
Type of electrical connection for auxiliary- and control current circuit		Spring clamp connection
Rail mounting possible		Yes
Degree of protection (IP)		IP20
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		Yes

Characteristics

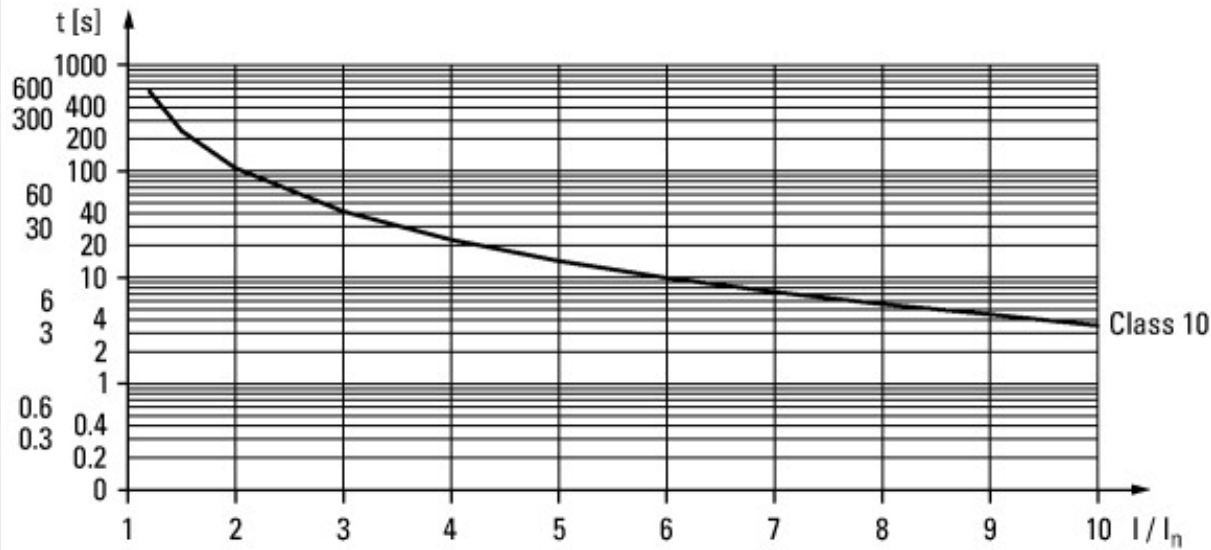


Tripping characteristics
CLASS 10

set motor current $\leq 4 \text{ A}$

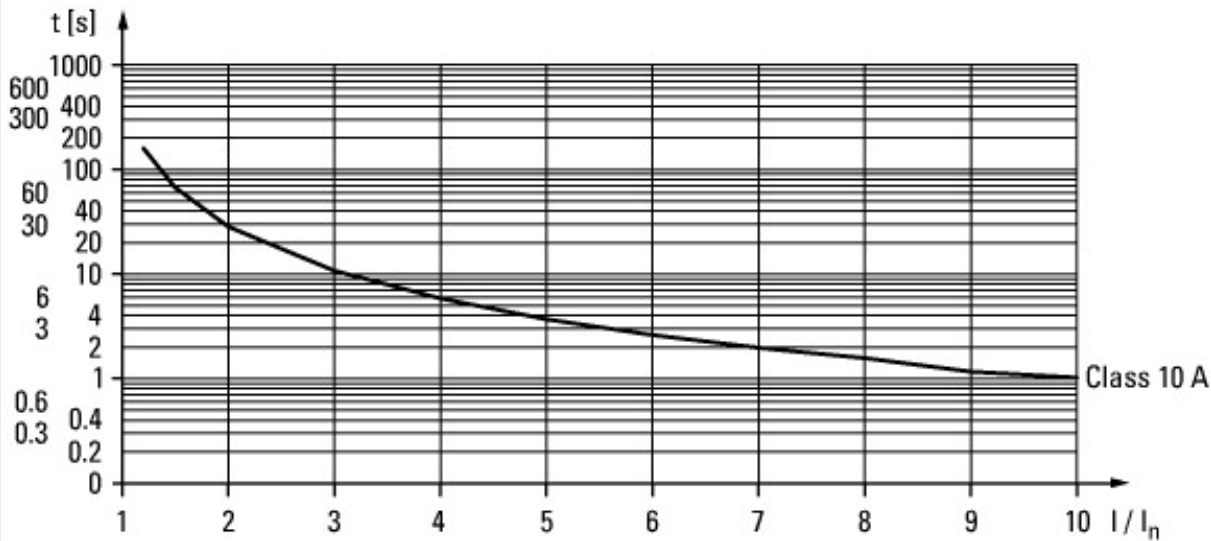

Tripping characteristics
CLASS 10A

set motor current $> 4 \text{ A}$

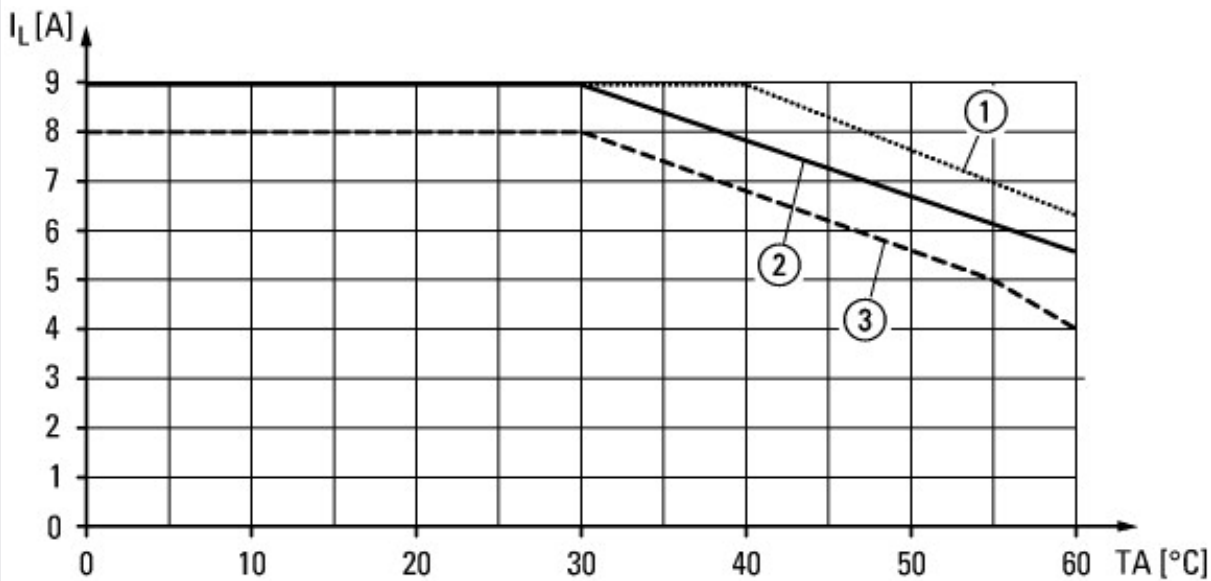


Current derating

① Single device

- ② connected in series with 30 mm clearance
- ③ connected in series without clearance

Dimensions

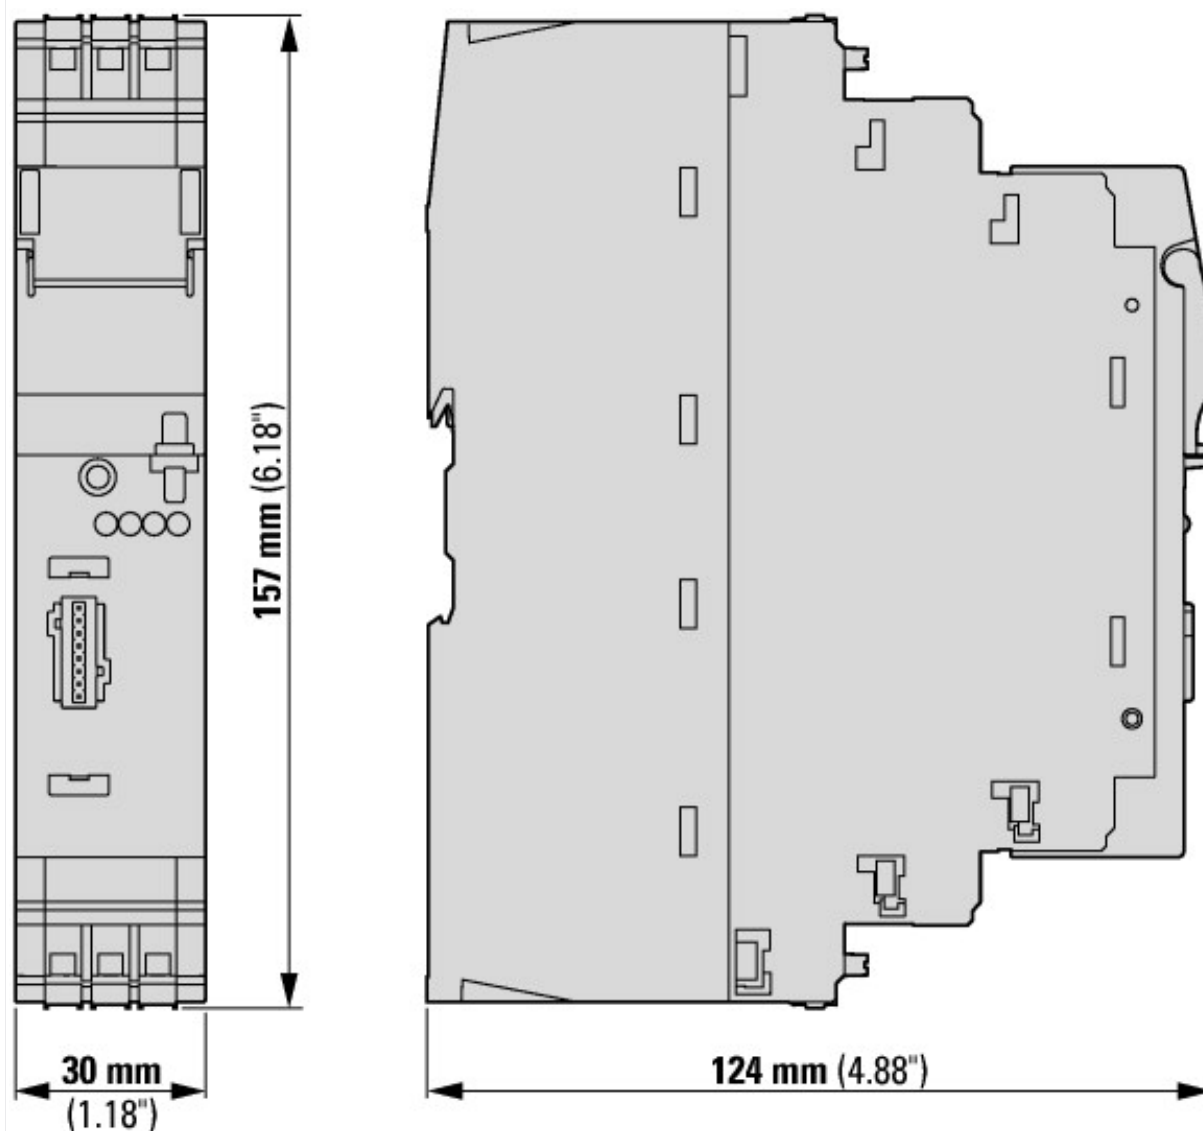

Additional product information (links)

IL120002ZU Electronic motor starter with SWD connection

IL120002ZU Electronic motor starter with SWD connection

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL120002ZU2015_04.pdf

Produktinformation EMS, Hinweise zur Projektierung

http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1040938_de.pdf