




Safety relays for emergency stop/protective door/light curtain monitoring, 24VDC, off-delayed, 0-300 sec.

Part no. ESR5-NV3-300
Article no. 171858
Catalog No. ESR5-NV3-300

Delivery program

| | | | |
|---|----------------|----|--|
| Product range | | | Electronic safety relays |
| Basic function | | | Emergency stop; emergency switching off Protective door Light curtain |
| Features | | | |
| Mounting width | | mm | 45 |
| | | | Automatic or manual start Monitored reset |
| Operation | | | single-channel dual-channel |
| Supply voltage | U _s | | 24 V DC |
| Approval | | |  |
| Safety related characteristics | | | Cat. 4 PL e according to EN ISO 13849-1 Non-time-delay contacts, SILCL 3 as per IEC 62061 and SIL 3 as per IEC 61508 Off-delay contacts, SILCL 2 as per IEC 62061 |
| Number of enabling paths to EN 60204-1 Stop functions category | | | |
| Enable current paths to IEC/EN 60204-1 Stop category 0 | | | 3 |
| Enable current paths to IEC/EN 60204-1 Stop category 1 | | | 2 |
| Signal current paths | | | 1 |

Technical data

General

| | | | |
|------------------------|------------|-------------------|---|
| Intended use | | | Sicherheitsrelais zur Überwachung von Not-Halt- und Schutztürschaltern. Mit Hilfe dieses Modules werden Stromkreise sicherheitsgerichtet unterbrochen. |
| Policies List | | | EMV 2004/108/EG, Maschinen 2006/42/EG |
| Standards | | | EN ISO 13849-1:2008, EN 62061:2005+AC:2010, EN 61508, Parts 1-7:2001, EN 50178:1997, EN 60204-1:2006+A1:2009 |
| Dimensions (W x H x D) | | mm | 45 x 114.5 x 99 |
| Mounting width | | mm | 45 |
| Weight | | kg | 0,48 |
| Mounting position | | | As required |
| Mounting | | | Top-hat rail IEC/EN 60715, 35 mm |
| Connection type | | | M3 screw terminals |
| Lifespan, mechanical | Operations | x 10 ⁶ | 10 |
| Terminal capacity | | | |
| Solid | | mm ² | 1x (0.2 – 2.5) 2x (0.2 – 1) |
| Flexible with ferrule | | mm ² | 1x (0.25 – 2.5) 2x (0.25 – 1) |
| Solid or stranded | | AWG | 24 - 12 |
| Terminal screw | | Nm | |
| Pozidriv screwdriver | | Size | 2 |
| Standard screwdriver | | mm | 0.6 x 3.5 |
| Max. tightening torque | | Nm | 0.6 |
| Stripping length | | mm | 7 |

| | | | |
|-----------------------------------|-----------------|-----|--|
| Operating conditions | | | |
| Climatic environmental conditions | | | |
| Climatic proofing | | | Cold to EN 60068-2-1 Dry heat to IEC 60068-2-2 Damp heat as per EN 60068-2-3 |
| Ambient temperature | | | |
| Operation | θ | °C | -20 - +55 |
| Storage | θ | °C | -40 - +70 |
| Condensation | | | Non-condensing |
| Atmospheric conditions | | | |
| relative humidity | | % | Max. 75 |
| Air pressure (operation) | | hPa | 795 - 1080 |
| Altitude | Above sea level | m | 2000 |
| Power loss | P | W | 5.43 |

Ambient conditions, mechanical

| | | | |
|---|------------------------------|---------------------|--|
| Degree of protection to VDE 0470-1 | | | |
| Enclosures | | | IP20 |
| Terminals | | | IP20 |
| Degree of Protection | | | Installation location: ≥ IP54 |
| B10d [switching cycles] | | | 300000 |
| Protection against direct contact when actuated from front (EN 50274) | | | Finger and back-of-hand proof |
| Vibrations (IEC/EN 60068-2-6) | | | 10 - 150 Hz Amplitude: 0.15 mm Acceleration: 2 g |
| Clearance in air and creepage distances | | | EN 50178, UL 508, CSA C22.2, No. 14-95 |
| Rated impulse withstand voltage | U _{imp} | V AC | 4000 |
| Insulation | | | Basic isolation Safe isolation, reinforced insulation, and 6 kV between the enable current paths (13/14, 23/24, 33/34) and the remaining rungs, as well as between 13/14, 23/24, 33/34 in relation to each other. |
| Overvoltage category/pollution degree | | | III/2 |
| Stop category | according to EN60204-1 | | 3,6 |
| Technical safety parameters: | | | |
| Values according to EN ISO 13849-1 | | | |
| Performance level | according to EN ISO 13849-1 | | PL e |
| Category | according to EN ISO 13849-1 | | Kat. 4 |
| Safety integrity level claim limit | in accordance with 62061 | | SILCL 3 |
| Safety integrity level | In accordance with IEC 61508 | | SIL 3 |
| Probability of failure per hour | PFH _d | x 10 ⁻¹⁰ | 3.6 |
| Prooftest High Demand | | Months | 240 |
| Prooftest Low Demand | | Months | 19 |
| Rated operational voltage | U _e | V AC | 230 |
| Rated operational voltage | U _e | V | 24 V DC |
| Permissible range | | | 0.85 - 1.1 x U _e |
| Rated insulation voltage | U _i | V AC | 250 |
| Quadratic summation current | | A ² | 55 A ² (I _{TH} ² = I ₁ ² + I ₂ ² + I ₃ ² + I ₄ ² + I ₅ ²) |
| Notes | | | Observe derating curve → Engineering |
| Inrush current | | A | min - max 0.025 - 6 |
| Minimum switching capacity | | W | 0.4 |

Input data

| | | | |
|---|--|------|------------|
| Current consumption | | mA | DC: 155 |
| Voltage at input, starting and feedback circuit | | V DC | Approx. 24 |

| | | | |
|---|-------------------|-----|--|
| Pick-up time (K1, K2) for UN automatic mode, typical | t _A | ms | 600 |
| Pick-up time (K1, K2) for UN manual operation, typical | t _A | ms | 70 |
| Pick-up time | | ms | at U _e in automatic mode: normally 600 at U _e in manual mode: normally 70 |
| Reset time (K1, K2) for U _N , normally | t _R | ms | 20 (non-delayed contacts) |
| OFF-delay | tr _z | s | 0.2 - 300 ± 40% (K3, K4 adjustable) |
| Recovery time | t _W | ms | Approx. 1000 |
| Simultaneity for inputs 1/2 | t _{sync} | ms | ∞ |
| Maximum permissible total cable resistance (input and starting circuits for UN) | R _L | Ω | 22 |
| Maximum switching frequency | | Hz | 0.5 |
| Status indication | | LED | Green |

Output data

| | | | |
|--|--|-------|--|
| Contact type | | | |
| Non-delayed enable current paths | | | 3 |
| Delayed enable current paths | | | 2 |
| Non-delayed signal current path | | | 1 |
| Switching voltage | | | min – max 15 - 250 V AC 15 - 250 V DC |
| Limiting continuous current | | A | per N/O: 6 N/C: 6 |
| Short-circuit protection for output circuits, external | | | Non-time-delay 6-A fast-blow fuse Time-delay 10-A gL/gG Neozed fuse |
| Output fuse | | | |
| NEOZED (delayed) | | gL/gG | 10 |
| fast | | | 6 (non-delayed) |
| Maximum breaking power | | | |
| Resistive load (τ = 0 ms) | | | |
| 24 V DC | | W | 144 |
| 48 V DC | | W | 288 |
| 110 V DC | | W | 77 |
| 220 V DC | | W | 88 |
| 250 V AC | | VA | 1500 |
| Inductive load (τ = 40 ms) | | | |
| 24 V DC | | W | 42 |
| 48 V DC | | W | 40 |
| 110 V DC | | W | 35 |
| 220 V DC | | W | 33 |
| Switching capacity | | | |
| | | | In accordance with IEC 60947-5-1 |
| AC-15 | | | |
| 230 V | | A | 4 A bei 360 S/h 3 A bei 3600S/h |
| DC-13 | | | |
| 24 V | | A | 2.5 A bei 3600S/h |
| Further information (flip catalog) | | | description |

Electromagnetic compatibility (EMC)

| | | | |
|-----------------------|--|--|---------------------------------|
| Emitted interference | | | In accordance with EN 61000-6-4 |
| Interference immunity | | | according to EN 61000-6-2 |

Design verification as per IEC/EN 61439

| | | | |
|--|-------------------|----|------|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I _n | A | 0 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P _{vs} | W | 5.43 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |

| | | |
|--|----|--|
| Operating ambient temperature max. | °C | 55 |
| IEC/EN 61439 design verification | | |
| 10.2 Strength of materials and parts | | |
| 10.2.2 Corrosion resistance | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | Meets the product standard's requirements. |
| 10.4 Clearances and creepage distances | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | |
| 10.9.2 Power-frequency electric strength | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 6.0

| | | |
|---|---|----------------------|
| Relays (EG000019) / Device for monitoring of safety-related circuits (EC001449) | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Monitoring equipment (low-voltage switch technology) / Device for monitoring of safety-related circuits (ecl@ss8.1-27-37-18-19 [AC0304008]) | | |
| Model | | Basic device |
| Suitable for monitoring of position switches | | Yes |
| Suitable for monitoring of emergency-stop circuits | | Yes |
| Suitable for monitoring of valves | | No |
| Suitable for monitoring of optoelectronic protection equipment | | No |
| Suitable for monitoring of tactile sensors | | No |
| Suitable for monitoring of magnetic switches | | No |
| Suitable for monitoring of proximity switches | | No |
| Type of electric connection | | Screw connection |
| Rail mounting possible | | Yes |
| Rated control supply voltage Us at AC 50HZ | V | 0 - 230 |
| Rated control supply voltage Us at AC 60HZ | V | 0 - 0 |
| Rated control supply voltage Us at DC | V | 24 - 24 |
| Voltage type for actuating | | DC |
| With detachable clamps | | Yes |
| Evaluation inputs | | One- and two-channel |
| With start input | | Yes |
| With muting function | | No |
| With feedback circuit | | Yes |
| Release-delay | s | 0.2 - 300 |
| Number of outputs, safety related, undelayed, with contact | | 3 |
| Number of outputs, safety related, delayed, with contact | | 2 |
| Number of outputs, safety related, undelayed, semiconductors | | 0 |
| Number of outputs, safety related, delayed, semiconductors | | 0 |

| | | | |
|---|--|----|---------|
| Number of outputs, signalling function, undelayed, with contact | | | 1 |
| Number of outputs, signalling function, delayed, with contact | | | 0 |
| Number of outputs, signalling function, undelayed, semiconductors | | | 0 |
| Number of outputs, signalling function, delayed, semiconductors | | | 0 |
| Category according to EN 954-1 | | | 4 |
| Type of safety acc. IEC 61496-1 | | | |
| Stop category acc. to IEC 60204 | | | 0 + 1 |
| Performance level acc. to EN ISO 13849-1 | | | Level e |
| SIL according to IEC 61508 | | | 3 |
| With approval for TÜV | | | Yes |
| With approval for BG BIA | | | No |
| With approval according to UL | | | Yes |
| Width | | mm | 45 |
| Height | | mm | 99 |
| Depth | | mm | 114.5 |


Approvals

| | | | |
|-----------------------------|--|--|--|
| Product Standards | | | IEC/EN see Technical Data; UL 508; CSA-C22.2 No. 14-95; CE marking |
| UL File No. | | | E29184 |
| UL Category Control No. | | | NKCR; NKCR7 |
| CSA File No. | | | UL report applies to both US and Canada |
| CSA Class No. | | | 3211-83; 3211-03 |
| North America Certification | | | UL listed, certified by UL for use in Canada |
| Degree of Protection | | | IEC: IP20, UL/CSA Type: - |

Characteristics

PU05907001Z safety manual

Dimensions

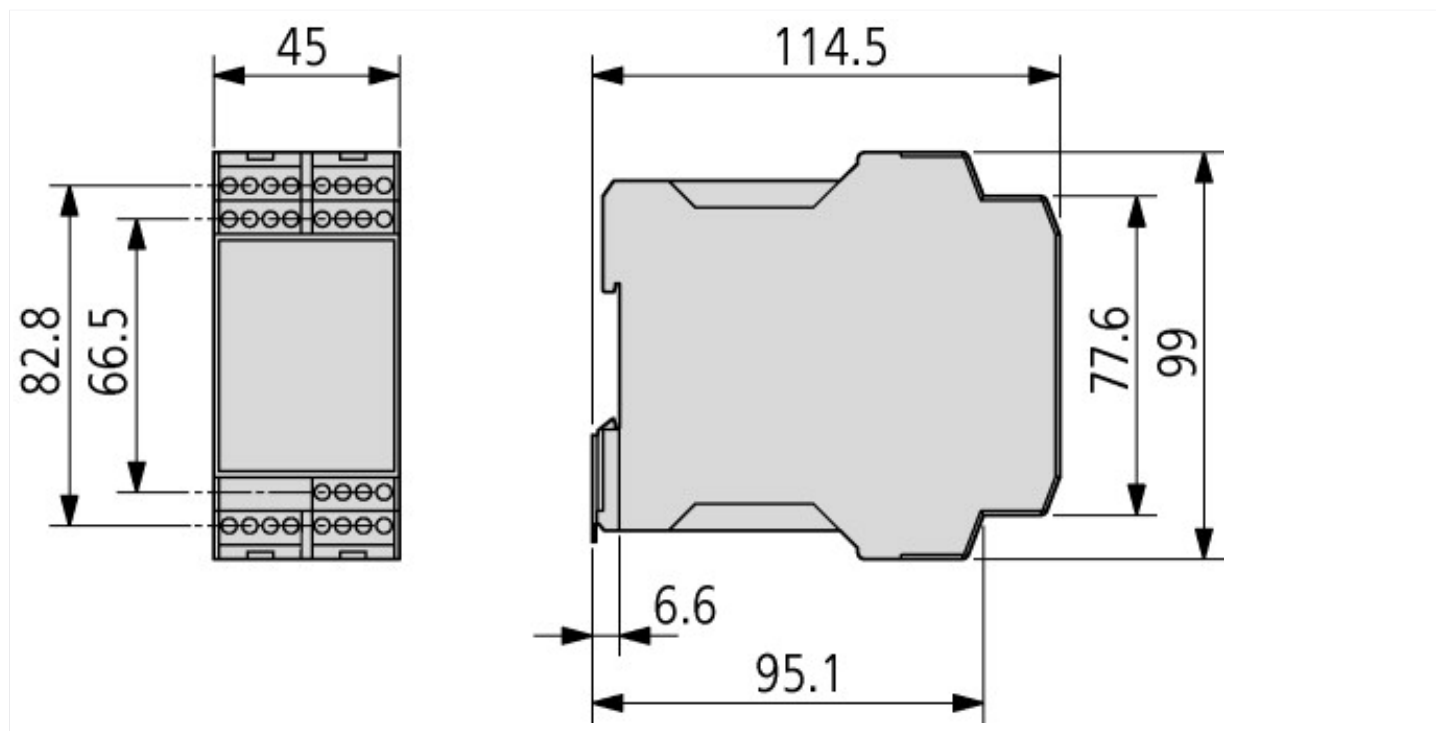

Additional product information (links)

| | |
|--|---|
| IL049001ZU operator manual for electricians | |
| IL049001ZU operator manual for electricians | ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL049001ZU2013_06.pdf |
| description | http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&startpage=13.15 |