



**Variable frequency drive SVX 3-/3-phase 110 kW 690 V; protection type IP54; integrated EMC filter**

**Part no.** SVX125A2-5A4N1  
**Article no.** 125789  
**Catalog No.** SVX125A2-5A4N1

## Delivery program

|                                  |          |    |   |
|----------------------------------|----------|----|---|
| Product range                    |          |    | Variable frequency drives   |
| Part group reference (e.g. DIL)  |          |    | SVX   |
| Rated operational voltage        | $U_e$    |    | 600 V AC, 3-phase<br>690 V AC, 3-phase                                      |
| Output voltage with $V_e$        | $U_2$    |    | 600 V AC, 3-phase<br>690 V AC, 3-phase                                      |
| Mains voltage (50/60Hz)          | $U_{LN}$ | V  | 525 (-15%) - 690 ( $\pm 10\%$ )   |
| <b>Rated operational current</b> |          |    |   |
| At 150% overload                 | $I_e$    | A  | 125   |
| At 110% overload                 | $I_e$    | A  | 144   |
| Note                             |          |    | Overload cycle for 60 s every 600 s   |
| <b>Assigned motor rating</b>     |          |    |   |
| Note                             |          |    | For AC motors with internal and external ventilation with 50 Hz / 60 Hz     |
| Note                             |          |    | Overload cycle for 60 s every 600 s   |
| Note                             |          |    | at 690 V, 50 Hz   |
| 150 % Overload                   | P        | kW | 110   |
| 110 % Overload                   | P        | kW | 132   |
| 150 % Overload                   | $I_M$    | A  | 114   |
| 110 % Overload                   | $I_M$    | A  | 134   |
| Note                             |          |    | at 690 V, 60 Hz   |
| 150 % Overload                   | P        | HP | 125   |
| 110 % Overload                   | P        | HP | 150   |
| 150 % Overload                   | $I_M$    | A  | 109   |
| 110 % Overload                   | $I_M$    | A  | 125   |
| Degree of Protection             |          |    | IP54  |
| Fieldbus connection (optional)   |          |    | PROFIBUS-DP<br>LonWorks<br>CANopen®<br>DeviceNet<br>Modbus-TCP<br>BACnet/IP |
| Fitted with                      |          |    | Radio interference suppression filter<br>OLED display<br>DC link choke      |
| Frame size                       |          |    | FR9   |
| Connection to SmartWire-DT       |          |    | No  |

## Technical data

|                            |          |    |   |
|----------------------------|----------|----|---|
| <b>General</b>             |          |    |   |
| Standards                  |          |    | Specification for general requirements: IEC/EN 61800-2<br>EMC requirements: IEC/EN 61800-3<br>Safety requirements: IEC/EN 61800-5-1 |
| Certifications             |          |    | CE, UL, cUL, c-Tick   |
| Production quality         |          |    | RoHS, ISO 9001  |
| Climatic proofing          | $\rho_w$ | %  | < 95% relative humidity, no condensation, no corrosion, no dripping water   |
| Ambient temperature        |          |    |   |
| operation (150 % overload) | $\theta$ | °C | -10 - +50   |

|                                   |   |    |   |
|-----------------------------------|---|----|---|
| operation (110 % overload)        | θ | °C | -10 - +40   |
| Storage                           | θ | °C | -40 - +70   |
| Radio interference level          |   |    |   |
| Radio interference class (EMC)    |   |    | C2, C3, depending on the motor cable length, the connected load, and ambient conditions. External radio interference suppression filters (optional) may be necessary. |
| Environment (EMC)                 |   |    | 1st and 2nd environments  |
| Mounting position                 |   |    | Vertical  |
| Altitude                          |   | m  | 0 - 1000 m above sea level<br>above 1000 m with 1 % performance reduction per 100 m<br>max. 3000 m  |
| Degree of Protection              |   |    | IP54  |
| Protection against direct contact |   |    | BGV A3 (VBG4, finger- and back-of-hand proof)   |

### Main circuit

|                                       |            |     |   |
|---------------------------------------|------------|-----|---|
| Supply                                |            |     |   |
| Rated operational voltage             | $U_e$      |     | 600 V AC, 3-phase<br>690 V AC, 3-phase                                  |
| Mains voltage (50/60Hz)               | $U_{LN}$   | V   | 525 (-15%) - 690 (±10%)   |
| System configuration                  |            |     | AC supply systems with earthed center point                             |
| Supply frequency                      | $f_{LN}$   | Hz  | 50/60   |
| Frequency range                       | $f_{LN}$   | Hz  | 45 - 66   |
| Power section                         |            |     |   |
| Function                              |            |     | Frequency inverter with internal DC link and IGBT inverter              |
| Output voltage with $V_e$             | $U_2$      |     | 600 V AC, 3-phase<br>690 V AC, 3-phase                                  |
| Output Frequency                      | $f_2$      | Hz  | 0 - 50/60 (max. 320)  |
| Switching frequency                   | $f_{PWM}$  | kHz | 1.5<br>adjustable 1 - 6   |
| Operation Mode                        |            |     | U/f control<br>sensorless vector control (SLV)                          |
| Frequency resolution (setpoint value) | $\Delta f$ | Hz  | 0.01  |
| Rated operational current             |            |     |   |
| At 150% overload                      | $I_e$      | A   | 125   |
| At 110% overload                      | $I_e$      | A   | 144   |
| Fitted with                           |            |     | Radio interference suppression filter<br>OLED display<br>DC link choke  |
| Frame size                            |            |     | FR9   |
| Motor feeder                          |            |     |   |
| Note                                  |            |     | For AC motors with internal and external ventilation with 50 Hz / 60 Hz |
| Note                                  |            |     | Overload cycle for 60 s every 600 s                                     |
| Note                                  |            |     | at 690 V, 50 Hz   |
| 150 % Overload                        | P          | kW  | 110   |
| 110 % Overload                        | P          | kW  | 132   |
| Note                                  |            |     | at 690 V, 60 Hz   |
| 150 % Overload                        | P          | HP  | 125   |
| 110 % Overload                        | P          | HP  | 150   |

### Control section

|                          |       |   |  |
|--------------------------|-------|---|--|
| External control voltage | $U_c$ | V | 24 V DC (max. 250 mA)  |
| Reference voltage        | $U_s$ | V | 10 V DC (max. 10 mA)   |
| Analog inputs            |       |   | 2, parameterizable, 0 - 10 V DC, 0/4 - 20 mA                               |
| Analog outputs           |       |   | 1, parameterizable, 0/4 - 20 mA  |
| Digital inputs           |       |   | 6, parameterizable, max. 30 V DC   |
| Digital outputs          |       |   | 1, parameterizable, 48 V DC/50 mA  |
| Relay outputs            |       |   | 2, parameterizable, N/O, 8 A (24 V DC) / 8 A (250 V AC) / 0,4 A (125 V DC) |

### Assigned switching and protective elements

|   |  |  |            |
|---|--|--|------------|
| Power Wiring                                  |  |  |            |
| 150 % overload (CT/I <sub>H</sub> , at 50 °C) |  |  | DX-LN3-160 |
| Motor feeder                                  |  |  |            |

|   |  |  |                |
|---|--|--|----------------|
| 150 % overload (CT/I <sub>H</sub> , at 50 °C) |  |  | DX-LM3-150     |
| 110 % overload (VT/I <sub>L</sub> , at 40 °C) |  |  | DX-LM3-150     |
| 150 % overload (CT/I <sub>H</sub> , at 50 °C) |  |  | SIN-0185-6-0-P |
| 110 % overload (VT/I <sub>L</sub> , at 40 °C) |  |  | SIN-0185-6-0-P |


## Design verification as per IEC/EN 61439

|  |                  |   |  |
|--|------------------|---|--|
| Technical data for design verification   |                  |   |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>   | A | 125  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W | 2750   |
| IEC/EN 61439 design verification   |                  |   |  |
| 10.2 Strength of materials and parts   |                  |   |  |
| 10.2.2 Corrosion resistance  |                  |   |  |
|  |                  |   | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |   |  |
|  |                  |   | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |   |  |
|  |                  |   | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |   |  |
|  |                  |   | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |   |  |
|  |                  |   | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                  |   |  |
|  |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                  |   |  |
|  |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                  |   |  |
|  |                  |   | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                  |   |  |
|  |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                  |   |  |
|  |                  |   | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                  |   |  |
|  |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                  |   |  |
|  |                  |   | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                  |   |  |
|  |                  |   | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                  |   |  |
|  |                  |   | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                  |   |  |
| 10.9.2 Power-frequency electric strength   |                  |   |  |
|  |                  |   | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                  |   |  |
|  |                  |   | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                  |   |  |
|  |                  |   | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                  |   |  |
|  |                  |   | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                  |   |  |
|  |                  |   | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                  |   |  |
|  |                  |   | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                  |   |  |
|  |                  |   | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Approvals

|                                      |  |  |   |
|--------------------------------------|--|--|---|
| Product Standards                    |  |  | UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking |
| UL File No.                          |  |  | E134360   |
| UL Category Control No.              |  |  | NMMS, NMMS2, NMMS7, NMMS8   |
| CSA File No.                         |  |  | UL report applies to both US and Canada                             |
| CSA Class No.                        |  |  | 3211-06   |
| North America Certification          |  |  | UL listed, certified by UL for use in Canada                        |
| Specially designed for North America |  |  | No  |
| Suitable for                         |  |  | Branch circuits   |
| Max. Voltage Rating                  |  |  | 3~ 690 V AC IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wey)            |
| Degree of Protection                 |  |  | IEC: IP54   |

## Dimensions

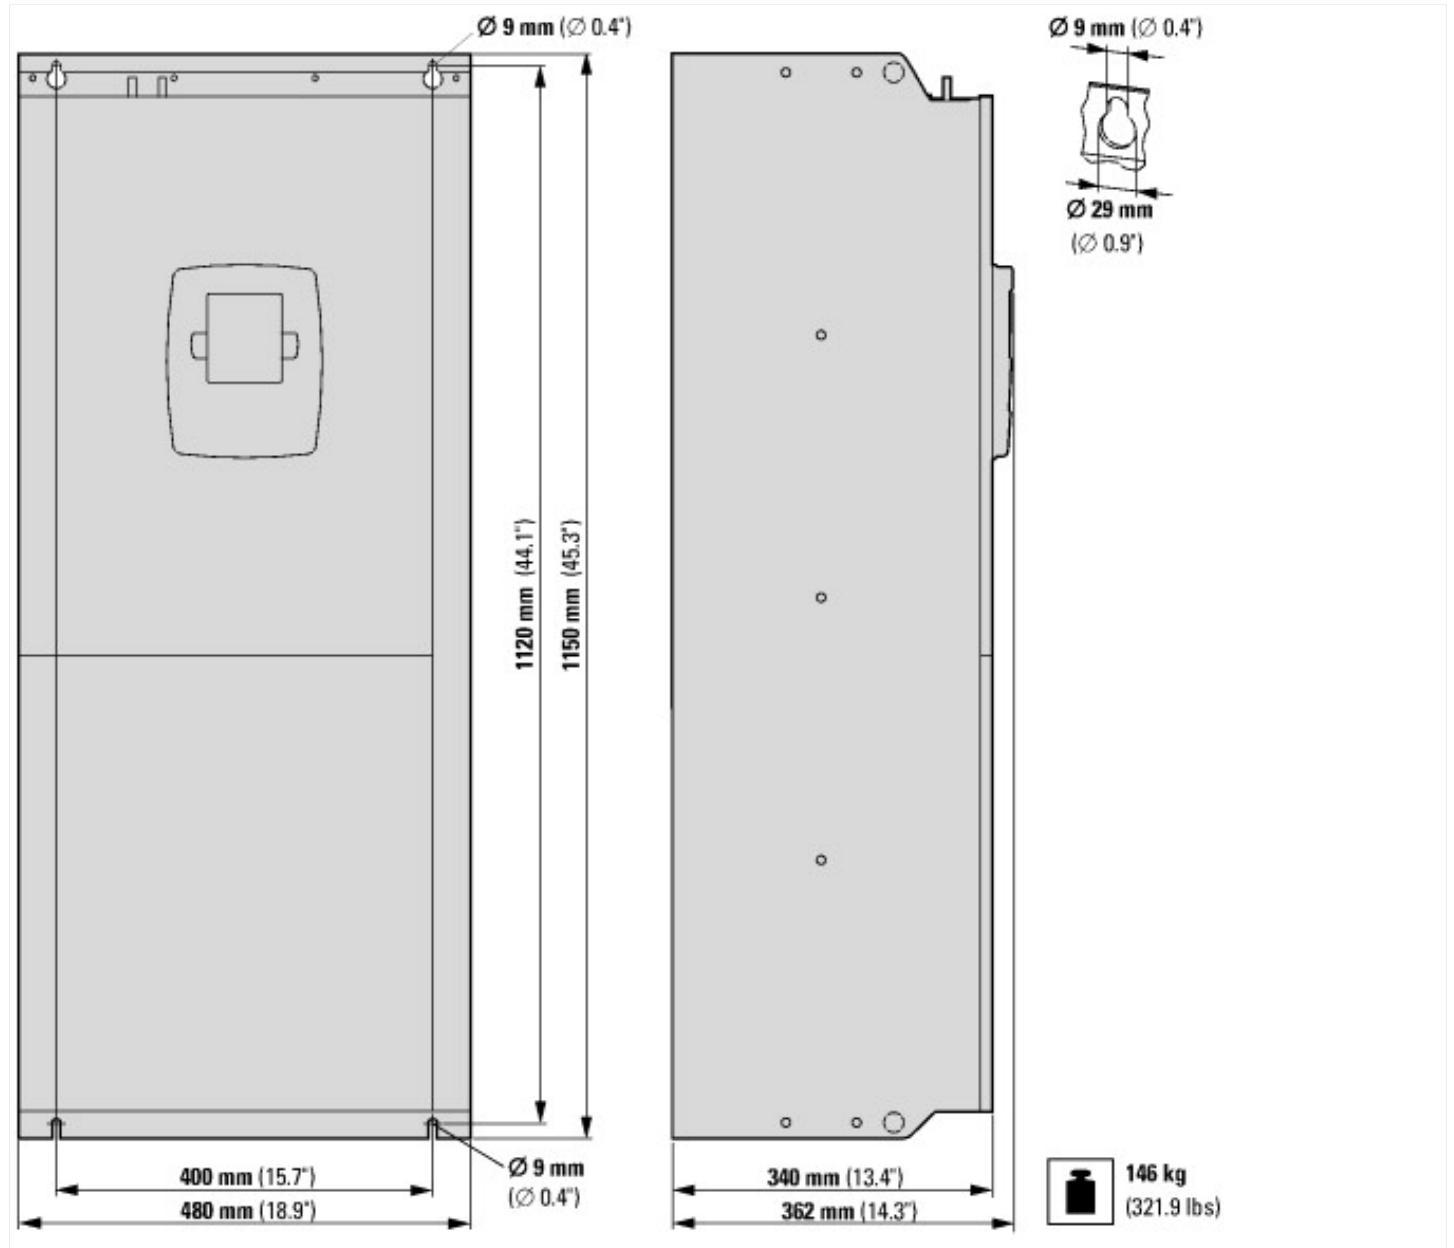

## Additional product information (links)

### IL04020008Z Instructions for 9000X frequency inverter: SVX, SPX

IL04020008Z Instructions for 9000X frequency inverter: SVX, SPX [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL04020008Z2012\\_08.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL04020008Z2012_08.pdf)

### MN04001004 Operating Manual for 9000X Variable Frequency Drives

MN04001004 Bedienhandbuch  
Frequenzumrichter 9000X - Deutsch [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN04001004Z\\_DE.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04001004Z_DE.pdf)

### MN04004001 Application manual 9000X variable frequency drives

MN04004001 Applikationshandbuch  
Frequenzumrichter 9000X - Deutsch [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN04004001Z\\_DE.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04004001Z_DE.pdf)

CA04020001Z-DE Sortimentskatalog:  
Antriebstechnik effizient gestalten, Motoren starten und steuern [http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_1095238\\_de.pdf](http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238_de.pdf)