



Thru-beam photoelectric sensor, receiver, Sn=6m, 4L, 10-30VDC, light/dark, NPN, PNP, M18, insulated material

Part no. 12102A6517
Article no. 135575
Catalog No. 12102A6517

Delivery program

| | | | |
|--|----------------|----|--|
| Basic function | | | Optical sensors |
| Product range | | | Comet Series |
| For connection of: | | | 2 m connection cable |
| Design (outer dimensions) | | mm | M18 x 1 |
| Rated operational voltage | U _e | | 10 - 30 V DC |
| Rated switching distance | S _n | mm | 24000 |
| Description | | | Detector (for combination with source) Beam: straight |
| Connection | | | 4-wire |
| Function | | | Thru-beam photoelectric sensor |
| Type of light | | | Visible red |
| Material | | | Insulated material |
| Switching type | | | NPN PNP |
| Switching principle | | | Adjustable bright/dark switching |
| Information relevant for export to North America | | | |
| Product Standards UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking | | | |
| UL File No. E117028 | | | |
| UL Category Control No. NRKH, NRKH7 | | | |
| CSA File No. 50513 | | | |
| CSA Class No. 3211-07 | | | |
| North America Certification UL listed, CSA certified | | | |
| Max. Voltage Rating 30 V DC | | | |
| Degree of Protection IEC: IP68, IP69K; UL/CSA Type: 1, 4, 6 | | | |

Technical data

General

| | | | |
|-----------------------------|--|---|----------------------------|
| Standards | | | IEC/EN 60947-5-2 |
| Ambient temperature | | | -20 - +70 |
| Mechanical shock resistance | | g | 100 Shock duration 3 ms |
| Degree of Protection | | | IP67 |

Characteristics

| | | | |
|--|----------------|-----|---|
| Rated switching distance | | | |
| Rated switching distance | S _n | mm | 24000 |
| Range | | mm | 24 |
| Rated operational voltage | U _e | | 10 - 30 V DC |
| Operating current in the switched state at 24 V DC | I _b | mA | 30 |
| Maximum load current | I _e | mA | < PNP: 100 NPN: 250 (120 > 55 °C) |
| Response time | | ms | 3.5 |
| Switching state display | | LED | Red |
| Protective functions | | | Short-circuit protective device Protection against polarity reversal |
| Connection | | | 4-wire |
| Style | | | |
| Design (outer dimensions) | | mm | M18 x 1 |
| For connection of: | | | 2 m connection cable |
| Material | | | Insulated material |

Design verification as per IEC/EN 61439

| | | | |
|--|--|----|-----|
| Technical data for design verification | | | |
| Operating ambient temperature min. | | °C | -20 |
| Operating ambient temperature max. | | °C | 70 |

Technical data ETIM 6.0

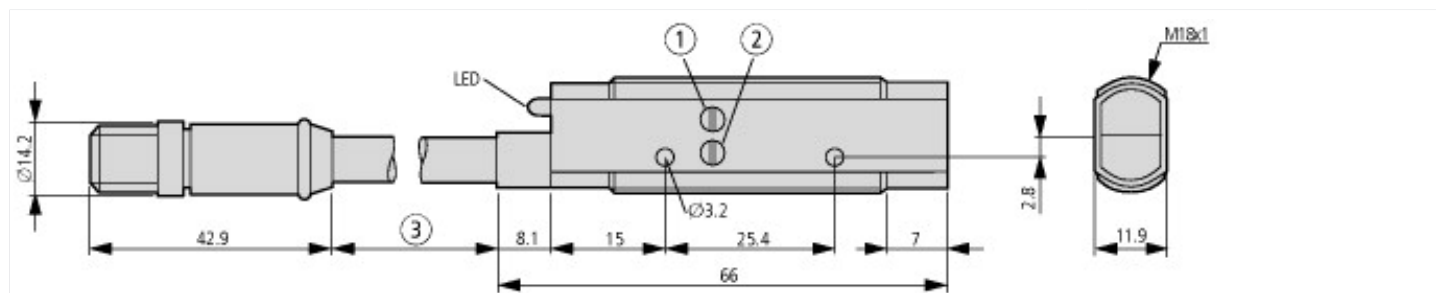
| | | | |
|--|--|----|---------------------------|
| Sensors (EG000026) / One-way light barrier (EC002716) | | | |
| Electric engineering, automation, process control engineering / Binary sensor technology, safety-related sensor technology / Optoelectronic sensor / One-way light barrier (ecI@ss8.1-27-27-09-01 [AKP250010]) | | | |
| Scope of delivery of the one-way system | | | Receiver |
| Opening angle | | ° | 0 |
| Pre failure notice | | | No |
| With time function | | | No |
| Rated switching distance | | mm | 24000 |
| Max. switching distance | | mm | 24000 |
| Max. output current | | mA | 100 |
| Reflector included | | | No |
| Analogue output 0 V ... 10 V | | | No |
| Analogue output 0 mA ... 20 mA | | | No |
| Analogue output 4 mA ... 20 mA | | | No |
| Analogue output -10 V ... +10 V | | | No |
| With other analog output | | | No |
| Setting procedure | | | Manual adjustment |
| With communication interface analog | | | No |
| With communication interface AS-Interface | | | No |
| With communication interface CANOpen | | | No |
| With communication interface DeviceNet | | | No |
| With communication interface Ethernet | | | No |
| With communication interface INTERBUS | | | No |
| With communication interface PROFIBUS | | | No |
| With communication interface RS-232 | | | No |
| With communication interface RS-422 | | | No |
| With communication interface RS-485 | | | No |
| With communication interface SSD | | | No |
| With communication interface SSI | | | No |
| Number of semiconductor outputs with signalling function | | | 0 |
| Number of contact energized outputs with signalling function | | | 0 |
| Number of protected semiconductor outputs | | | 0 |
| Number of protected contact energized outputs | | | 0 |
| Type of interface for safety communication | | | - |
| Type of electric connection | | | Cable |
| Type of switching output | | | PNP/NPN |
| Type of switch function | | | Programmable/configurable |
| Operation agent-safety class | | | Safety class 2 |
| Explosion safety category for gas | | | None |
| Explosion safety category for dust | | | None |
| Construction type housing | | | Cylinder, screw-thread |
| Width sensor | | mm | 0 |
| Diameter sensor | | mm | 18 |
| Height of sensor | | mm | 0 |
| Length of sensor | | mm | 70 |
| Switch function | | | Light-/dark switching |
| Material of optical surface | | | Plastic |
| Material housing | | | Plastic |
| Max. output current at protected output | | mA | 0 |
| Min. reflector distance | | mm | 0 |

| | | |
|---|-----------------|-------------------------|
| Ambient temperature | °C | -40 - 70 |
| Time of reaction | ms | 7 |
| Transmission range of the safety field | m | 0 |
| Switching frequency | Hz | 142 |
| Type of safety acc. IEC 61496-1 | | - |
| Switching voltage of OSSD at state "high" | V | 0 |
| Rated control supply voltage Us at AC 50HZ | V | 0 - 0 |
| Rated control supply voltage Us at AC 60HZ | V | 0 - 0 |
| Rated control supply voltage Us at DC | V | 10 - 30 |
| Voltage type | | DC |
| With monitoring function downstream switching devices | | No |
| Laser protection class | | None |
| Wavelength of the sensor | nm | 0 |
| Type of light | | Polarity free red light |
| Light dot | mm ² | 0 |
| AWG-number | | 0 |
| Material of cable sheath | | PUR (Polyurethane) |
| With restart blockage | | No |
| Suitable for safety functions | | No |
| Degree of protection (IP) | | IP67 |

Approvals

| | | |
|-----------------------------|--|--|
| Product Standards | | UL 508; CSA-C22.2 No. 14; IEC60947-5-2; CE marking |
| UL File No. | | E117028 |
| UL Category Control No. | | NRKH, NRKH7 |
| CSA File No. | | 50513 |
| CSA Class No. | | 3211-07 |
| North America Certification | | UL listed, CSA certified |
| Max. Voltage Rating | | 30 V DC |
| Degree of Protection | | IEC: IP68, IP69K; UL/CSA Type: 1, 4, 6 |

Dimensions

| | |
|---|------------|
|  | |
| Sensor with installed adapter | |
| ① | Light/dark |
| ② | Gain |

Additional product information (links)

| | |
|--|---|
| IL05305002Z Comet Series Optical Sensors | |
| IL05305002Z Comet Series Optical Sensors | ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05305002Z2016_07.pdf |