



Over current switch, 13A, 1p, D-Char, AC

Part no. FAZT-D13/1  
Article no. 240817  
Catalog No. FAZT-D13/1

Similar to illustration

## Delivery program

|   |                |    |  |
|---|----------------|----|--|
| Basic function                                  |                |    | Miniature circuit breakers                                     |
| Number of poles                                 |                |    | 1 pole   |
| Tripping characteristic                         |                |    | D  |
| Application                                     |                |    | Switchgear for industrial and advanced commercial applications |
| Rated current                                   | I <sub>n</sub> | A  | 13   |
| Rated switching capacity acc. to IEC/EN 60947-2 |                | kA | 25   |
| Product range                                   |                |    | FAZ-T  |

## Technical data

### Electrical

|                              |            |    |                |
|------------------------------|------------|----|----------------|
| Standards                    |            |    | IEC/EN 60947-2 |
| Rated voltage                |            | V  | 240/415        |
| Rated frequency              | f          | Hz | 50/60          |
| Rated switching capacity     |            | kA | 25             |
| Characteristic               |            |    | B, C, D        |
| Lifespan                     | Operations |    | 20000          |
| Direction of incoming supply |            |    | as required    |

### Mechanical

|                              |  |                 |   |
|------------------------------|--|-----------------|---|
| Standard front dimension     |  | mm              | 45  |
| Enclosure height             |  | mm              | 80  |
| Mounting width per pole      |  | mm              | 17.5  |
| Mounting                     |  |                 | Quick attachment with 3 latch positions for top-hat rail IEC/EN 60715 |
| Degree of Protection         |  |                 | IP20  |
| Terminals top and bottom     |  |                 | Twin-purpose terminals  |
| Terminal protection          |  |                 | Finger- and back-of-hand proof according to BGV A3 and ÖVE-EN 6       |
| Terminal capacities          |  | mm <sup>2</sup> | 1 - 25  |
| Tightening torque            |  | Nm              | 2 - 2.4   |
| Thickness of busbar material |  | mm              | 0.8 (except N 0.5 SU)   |
| Mounting position            |  |                 | As required   |

## Design verification as per IEC/EN 61439


|  |                   |    |   |
|--|-------------------|----|---|
| Technical data for design verification                   |                   |    |   |
| Rated operational current for specified heat dissipation | I <sub>n</sub>    | A  | 13  |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub>  | W  | 0   |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub>  | W  | 1.9   |
| Static heat dissipation, non-current-dependent           | P <sub>vs</sub>   | W  | 0   |
| Heat dissipation capacity                                | P <sub>diss</sub> | W  | 0   |
| Operating ambient temperature min.                       |                   | °C | -40   |
| Operating ambient temperature max.                       |                   | °C | 75  |
|  |                   |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |
| IEC/EN 61439 design verification                         |                   |    |   |
| 10.2 Strength of materials and parts                     |                   |    |   |

|  |  |  |
|--|--|--|
| 10.2.2 Corrosion resistance  |  | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 6.0

|  |    |         |
|--|----|---------|
| Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)   |    |         |
| Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB) (ec1@ss8.1-27-14-19-01 [AAB905011]) |    |         |
| Release characteristic   |    | D       |
| Number of poles (total)  |    | 1       |
| Number of protected poles  |    | 1       |
| Nominal rated current  | A  | 13      |
| Nominal rated voltage  | V  | 240     |
| Rated short-circuit breaking capacity I <sub>cn</sub> EN 60898 at 230 V  | kA | 15      |
| Rated short-circuit breaking capacity I <sub>cn</sub> EN 60898 at 400 V  | kA | 15      |
| Rated short-circuit breaking capacity I <sub>cu</sub> IEC 60947-2 at 230 V   | kA | 25      |
| Rated short-circuit breaking capacity I <sub>cu</sub> IEC 60947-2 at 400 V   | kA | 25      |
| Voltage type   |    | AC      |
| Current limiting class   |    | 3       |
| Frequency  | Hz | 50 - 60 |
| Concurrently switching N-neutral   |    | No      |
| Suitable for flush-mounted installation  |    | No      |
| Over voltage category  |    | 3       |
| Pollution degree   |    | 2       |
| Width in number of modular spacings  |    | 1       |
| Built-in depth   | mm | 70.5    |
| Additional equipment possible  |    | Yes     |
| Degree of protection (IP)  |    | IP20    |

Characteristics

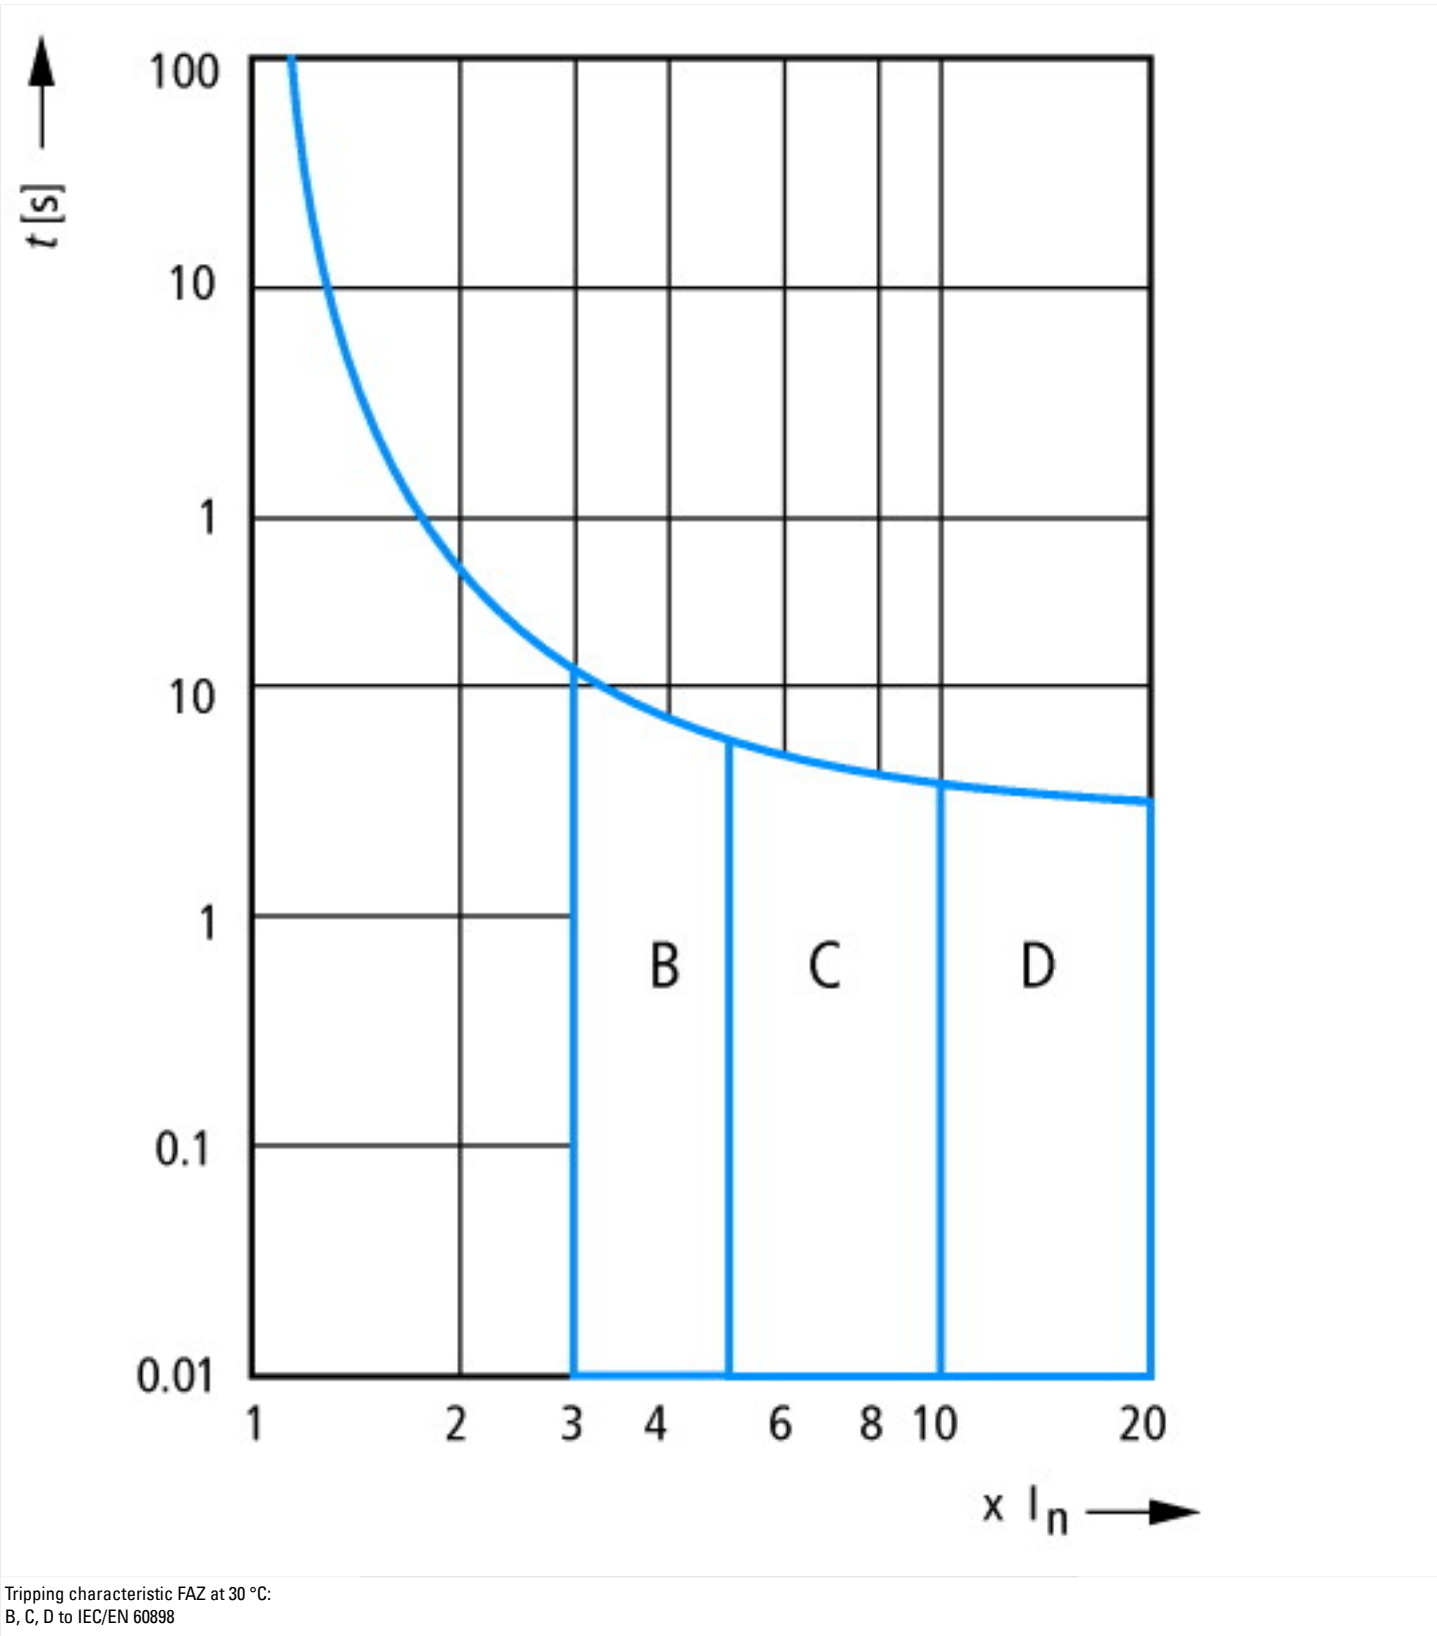

## Dimensions

