



Power supply unit, 3-phase, 400VAC/24VDC, 30A

Part no. GD4-300-BD3
Article no. 200014

Delivery program

Product range			GD4 power supply units
Description			unregulated smoothed
Phases			Three-phase
Input voltage range			380 - 420 V AC
Nominal input voltage			3 x 400 V AC
Rated output voltage			24 V DC
Rated output current		A	30
For use with			easy... MFD... EC4P... XC-CPU... XIOC... PS4...

Technical data

General

Protection class			1
Potential isolation			Yes, VDE 0551, IEC/EN 60742, SELV
Supply frequency			
Rated value		Hz	50/60
Range		Hz	50 - 60
Electromagnetic compatibility (EMC)			
Emitted interference			Class B (EN 55011, 22)
ESD	Air/contact discharge	kV	6 kV contact (Level 3), 8 kV air (Level 3), IEC/EN 61000-4-2
RFI			10 V/m, modulated, IEC/EN 61000 4-2
Burst			2 kV (Level 3) IEC/EN 61000-4-4
Surge			2 kV (Inst. Class 3), IEC/EN 61000-4-5
Surge voltage			4.9 kV, IEC EN 60947
Environmental compatibility			
Ambient temperature			-25 - 55
Ambient temperature, storage		°C	- -25 - 85
Overvoltage category/pollution degree			2, EN 50178
Vibration			0.075 mm (10 - 57 Hz), 10 cycles, IEC 60068-2-6
Shock resistance Shock duration 11 ms		g	15, IEC 60068-2-27 (3 shocks)
Altitude		m	Up to 2000 m a.s.l.; observe derating at higher altitudes
Notes			Derating From +44 to +55 °C: linear derating of power from 100 % to 93 %
Degree of Protection			IP20
Fixing			Screw fixing
Mounting position			As required
Heat dissipation		W	101

Input voltage

Rated value		V AC	400
Range		V AC	Pick-off ± 5 % 380, 400, 420
Input current nominal value per phase		A	1.8
No-load losses		W	38.2
Short-circuit losses		W	55.5

Output voltage

Rated value	V DC	24
Residual ripple	%	≤ 3
Output current (nominal value)	A	30
Output current, range at 55 °C	A	0 - 30


Terminal capacities

Solid	mm ²	0.5 - 4
Flexible with ferrule	mm ²	0.5 - 2.5
Connections		Screw connection

Dimensions

Width	mm	190
Height	mm	115
Depth	mm	240
Weight	kg	11.2

Fuse specification

Input current	I_1	A	1.8
Circuit-breaker			
PKZ			PKZM0-2.5
Current setting		A	1.8
Miniature circuit-breaker			
FAZ			FAZ-S2/1
Current/voltage characteristics			

Notes

Range of rated voltages U_e at 230 V or 3 x 400 V AC (primary side)
and a load current of $I = 0$ A up to rated current $1 \times I_e$

Design verification as per IEC/EN 61439



Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	0
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	P_{vs}	W	101
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			
			Meets the product standard's requirements.
10.2.5 Lifting			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			
			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			
			Meets the product standard's requirements.
10.4 Clearances and creepage distances			
			Meets the product standard's requirements.
10.5 Protection against electric shock			
			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			
			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			
			Is the panel builder's responsibility.
10.8 Connections for external conductors			
			Is the panel builder's responsibility.
10.9 Insulation properties			

10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 6.0

PLC's (EG000024) / PLC system power supply (EC000599)		
Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / SPS system power supply (ecl@ss8.1-27-24-22-09 [AKE532011])		
Input voltage at AC 50 Hz	V	0 - 0
Input voltage at AC 60 Hz	V	0 - 0
Input voltage at DC	V	0 - 0
Type of voltage (input voltage)		AC
Max. input current AC 50 Hz	A	1.8
Max. input current AC 60 Hz	A	1.8
Max. input current DC	A	0
Type of output voltage		DC
Output voltage at AC 50 Hz	V	0 - 0
Output voltage at AC 60 Hz	V	0 - 0
Output voltage at DC	V	0 - 0
Max. output current AC 50 Hz	A	0
Max. output current AC 60 Hz	A	0
Max. output current DC	A	30
Redundancy		No
Suitable for safety functions		Yes
Width	mm	190
Height	mm	240
Depth	mm	115

Dimensions

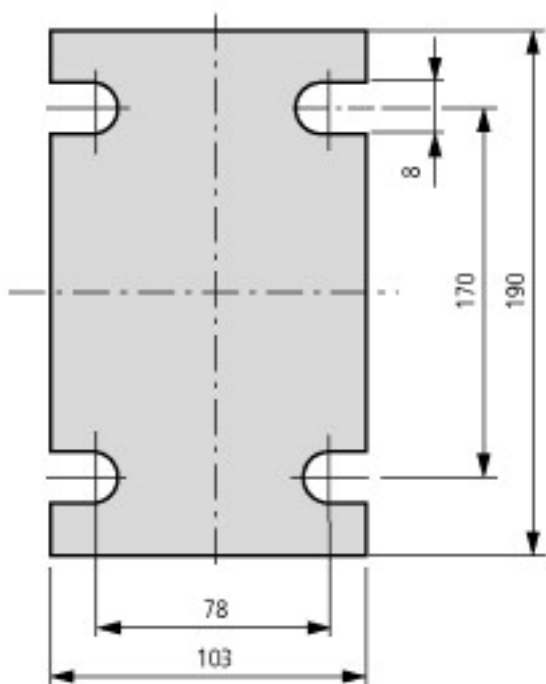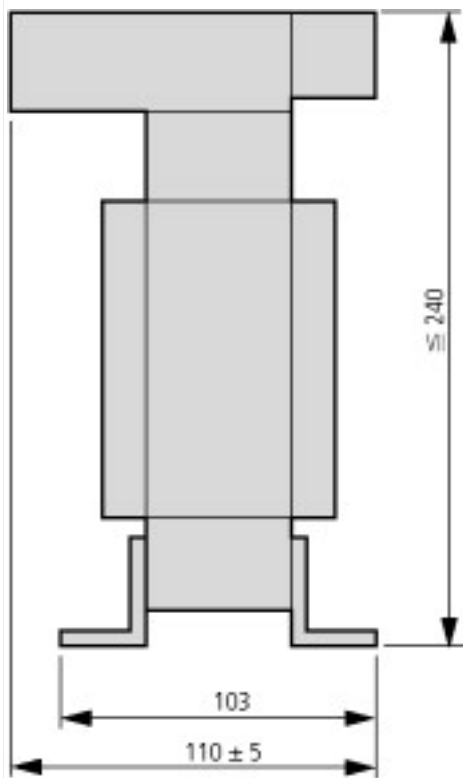

¹⁾ Maximum space requirements

Additional product information (links)

IL05012007Z (AWA2700-1612) Power supply unit

IL05012007Z (AWA2700-1612) Power supply unit ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05012007Z2010_11.pdf