




Fuse enclosure, 1x disconnecter 3p NH00 160A, HxWxD=250x375x150mm



Powering Business Worldwide™


Part no. **GSTA00-160/I43E-G**  
 Article no. **055871**

## Delivery program

Dimensions		mm	
Product range			Ci insulated enclosures
Basic function			Enclosures with devices fitted
Product function			Individual enclosures with NH fuse switch-disconnectors
Single unit/Complete unit			Stand-alone device
Degree of Protection			IP65
Description			Metric cable entry knockouts in all sides Fuse switch-disconnector fitted to steel mounting plate Fixing straps for wall fixing Sealable cover fasteners
Type cover			Transparent
Information about equipment supplied			Terminal for connecting the 4th conductor (PEN)
Width		mm	250
Height		mm	375
Depth		mm	150
Rated operational current	$I_e$	A	160 100
Rated operational voltage	$U_e$	V AC	500 690
Fuse cartridge		Size	NH00
5 <sup>th</sup> conductor can be retrofitted			K95/1N/BR

### Notes

**C**




2 x M50/20

6 x M25/16

8 x M20

**D**



1 x M50/32

6 x M25/16


**Notes** Fuse links

→ #288934

→ #288909

→ #100651

## Dimensions

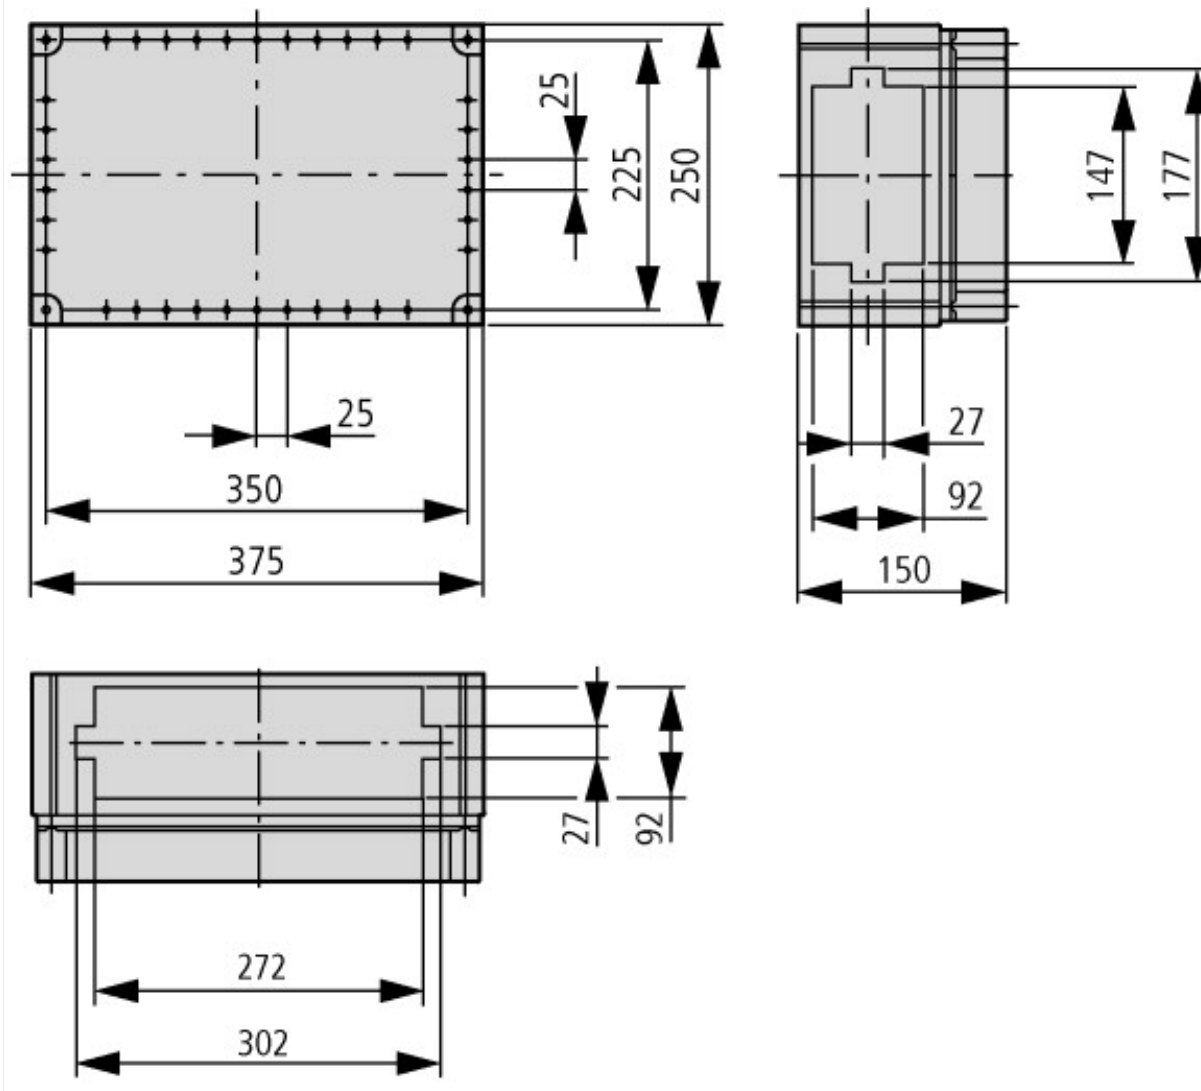

## Additional product information (links)

### AWA4640-0589 Fuse switch-disconnector

AWA4640-0589 Fuse switch-disconnector [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/05890696.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/05890696.pdf)

### AWA1400-1503 Fuse switch-disconnector

AWA1400-1503 Fuse switch-disconnector [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/15030696.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/15030696.pdf)

Manufacturer's Declaration CI-RoHS [ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31\\_Ci\\_RoHS.pdf](ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31_Ci_RoHS.pdf)

Declaration of conformity [ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci\\_ce.pdf](ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci_ce.pdf)