

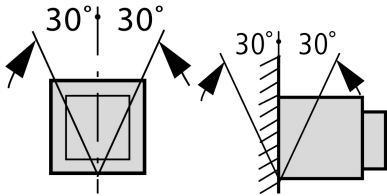
Part no. **IN63N4-63F**  
 Article no. **124373**

## Delivery program

Product range			Air circuit-breakers/switch-disconnectors
Product range			Open switch-disconnectors
Current Range			4000 to 6300 A
Protective function			without protection
Installation type			Fixed
Construction size			IN63
Standard/Approval			IEC
Number of poles			4 pole
Degree of Protection			IP20, IP55 with protective cover
Rated current = rated uninterrupted current	$I_n = I_u$	A	6300
up to 440 V 50/60 Hz	$I_{cm}$	kA	217
t = 1 s	$I_{cw}$	kA	85
t = 3 s	$I_{cw}$	kA	65
<b>Notes</b>			
Including rear connection main terminals and secondary terminal blocks according to ordered breaker options.			

## Technical data

### General

Standards			IEC/EN 60947
Ambient temperature			
Storage	$\theta$	°C	-40 - +70
Operating (open)		°C	-25 - +70
Mounting position			
Utilization category			B
Degree of Protection			IP20, IP55 with protective cover
Direction of incoming supply			as required

### Main conducting paths

Rated current = rated uninterrupted current	$I_n = I_u$	A	6300
Rated uninterrupted current at 50 °C	$I_u$	A	6200
Rated uninterrupted current at 60 °C	$I_u$	A	5600
Rated uninterrupted current at 70 °C	$I_u$	A	5100
Rated impulse withstand voltage	$U_{imp}$	V AC	8000
Rated operational voltage	$U_e$	V AC	690
Use in IT electrical power networks up to U = 440 V	$I_{IT}$	kA	88888888
Overvoltage category/pollution degree			III/3
Rated insulation voltage	$U_i$	V	1000

### Switching capacity

Rated short-circuit making capacity	$I_{cm}$		
up to 440 V 50/60 Hz	$I_{cm}$	kA	217
up to 690 V 50/60 Hz	$I_{cm}$	kA	187
Rated short-time withstand current 50/60 Hz			
t = 1 s	$I_{cw}$	kA	85
t = 3 s	$I_{cw}$	kA	65

Operating times			
Closing delay via spring release	ms	35	
Break times	ms	40	
Total opening delay via shunt release	ms	40	
Total opening delay via undervoltage release	ms	35/70	
Maximum operating frequency			
Maximum operating frequency	Operations/h	60	
Heat dissipation at rated current $I_n$			
Fixed mounting	W	620	
Withdrawable units (switch with cassette)	W	1550	

## Weight

Fixed mounting			
3-pole	kg	125	
4-pole	kg	163	
Withdrawable			
3-pole	kg	157	
4-pole	kg	200	
Cassette			
3 pole	kg	103	
4 pole	kg	103	

## Terminal capacities

Copper bar			
Fixed mounting			
Black	mm	6 x 10 x 100	
Withdrawable units			
Black	mm	6 x 10 x 100	

Permissible continuous current for circuit-breakers operating in switchboards at various internal ambient temperatures. The switchboard's internal ambient temperature should be estimated using the calculation methods of IEC regulation.

## Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.	°C	-25	
Operating ambient temperature max.	°C	70	

## Dimensions

