













Connection terminal, 250A, 4p, flat/round


Part no. K150/4
Article no. 034509

Delivery program

Product range			General switchboard accessories
Product function			Accessories panel building
Accessories			Terminations
Accessories			Terminals, 160 – 1000 A
Rated insulation voltage	U_i	V AC	1000
Description			Including labels for terminal marking U, V, W - X, Y, Z - L1, L2, L3 - T1, T2, T3 - PE, N, PEN,  Relationship of rated operational current → terminal capacity to IEC/EN 60439, VDE 0660 Part 500 or EN 50021 Outer terminal for round or sectoral conductor, other side for Cu strip
Rated operational current	I_e	A	250
Pole			4
Terminal capacity			
Cu/Al cable			
			Cu  Round stranded  Sectoral stranded  Round solid  Sectoral solid Al  Round solid  Sectoral solid
			1 x 35 - 150 2 x 16 - 70
Al cable			
			Al  Sectoral solid
			1 x 50 - 120 2 x 35 - 50
Copper band		mm	1 x 4 x 16 x 0.8 - 2 x 6 x 16 x 0.8
			 copper strip
Copper strip		mm	18 x 4
			 Cu bar

Notes Conversion kits for strip terminal in cable connection available separately
 Terminal covers available separately

Dimensions

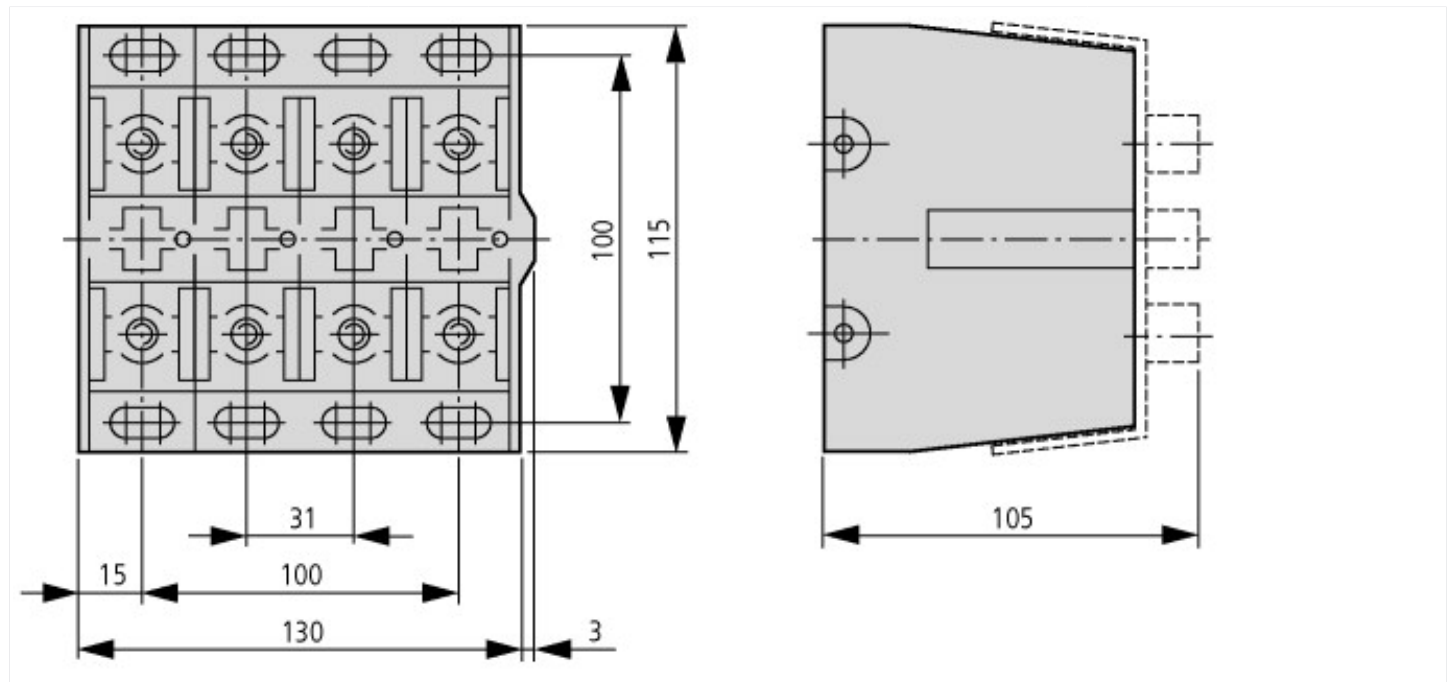

Additional product information (links)

AWA3400-0607 Connection terminal K150/...

AWA3400-0607 Connection terminal K150/... ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/06071089.pdf