



## Busbar enclosure, in=400A, 4p

**Part no.** SKA404-2I44  
**Article no.** 034204

### Delivery program

Dimensions		mm	
Product range			CI insulated enclosures
Basic function			Prepared enclosures
Product function			Busbar enclosures
Accessories			Busbar enclosures
Single unit/Complete unit			Complete housing
Width		mm	750
Height		mm	375
Depth		mm	225
Description			Top and bottom with full area knockouts for FL-4... flange Sides closed, but with full area knockout Sealable cover fasteners
Colour			RAL 7032, pebble grey (base) transparent, opaque (cover)
Type cover			Transparent
Protection type			IP65 (Enclosure) IP65 (KST cable entries from below) IP64 (KST cable entries from above) IP00 (Cable entry open)
Interval between busbar centres		mm	50
Rated operational current	$I_e$	A	400
Type of conductor			L1, L2, L3, PEN
<b>Notes</b>			
Calculating material allowance → General information chapter			
Selecting the busbar cross-section and the device to be used → Engineering chapter			

## Dimensions

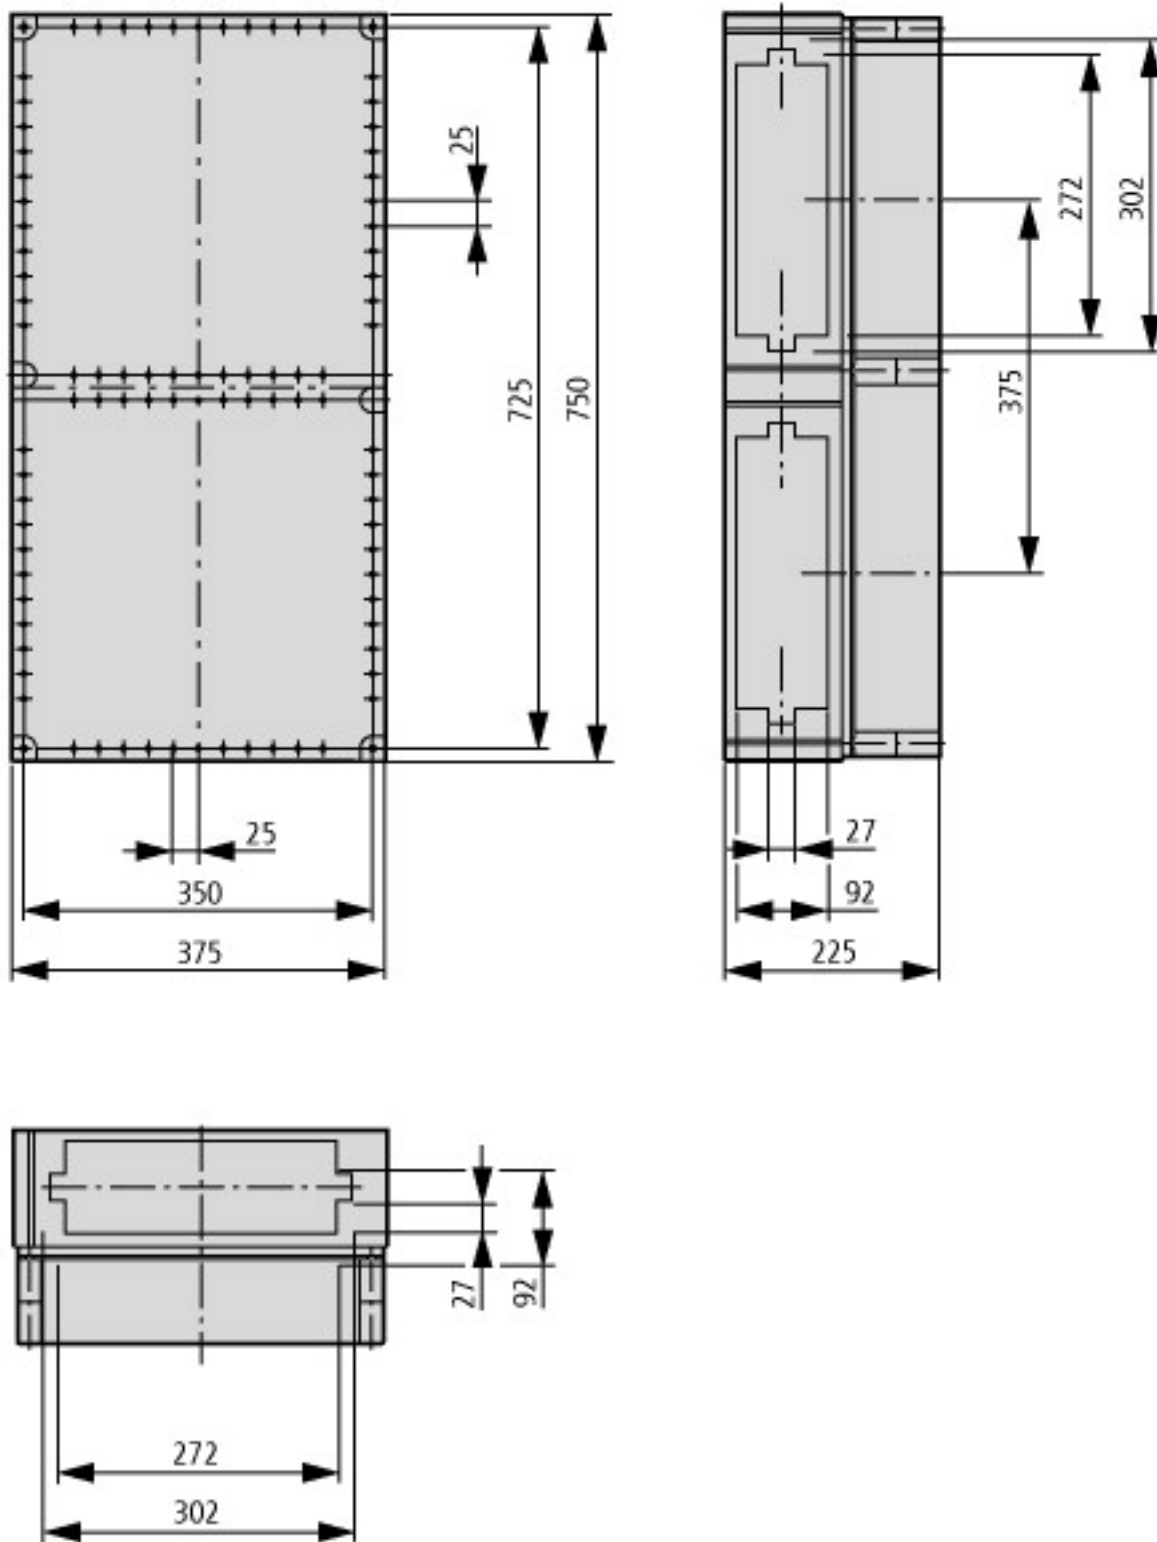

## Additional product information (links)

Manufacturer's Declaration CI-RoHS

[ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31\\_Ci\\_RoHS.pdf](ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31_Ci_RoHS.pdf)

Declaration of conformity

[ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci\\_ce.pdf](ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci_ce.pdf)