




Switched-mode power supply unit, 110-240VAC/24VDC, 5A


Part no. SN3-050-BU8
Article no. 100640

Delivery program

Product range			SN3 switched-mode power supply units
Description			Primary pulsed power supply, power reserve from up to 50 % Up to 5 devices can be paralleled to increase power and for redundancy
Phases			Single-phase
Input voltage range			85 - 264 V AC 100 - 350 V DC
Instructions			At  264 V DC additionally suitable, use fuse.
Nominal input voltage			110 - 240 V AC
Rated output voltage			24 V DC (-1/5%)
Rated output current		A	5
Rated output power		W	120
For use with			easy... MFD... EC4P... XC-CPU... XIOC... PS4...

Technical data

General

Standards			EN 61204, 2006/95/EC, 2004/108/EC, EN 50178, EN 60950, UL 60950, UL 508, SELV (EN 60950)
Degree of protection			
Enclosures			IP20
Terminals			IP20
Protection class			according to EN 61140, Class 1
Mounting			DIN rail (IEC/EN 60715), snap fixing
Mounting position			Horizontal
Heat dissipation		W	part no.  15
Efficiency		%	88

Dimensions

Width		mm	57
Height		mm	130
Depth		mm	130
Weight		kg	0.96
Minimum distance to adjacent devices		mm	horizontal 10, vertical 80

Terminal capacities

			Only operate plug-in terminals off load.
Input circuit			
Flexible with ferrule		mm ²	0.2...2.5 (22...14 AWG)
Flexible without ferrule		mm ²	0.2...2.5 (22...14 AWG)
Massive		mm ²	0.2...2.5 (22...14 AWG)
Output circuit			
Flexible with ferrule		mm ²	0.12...2.5 (26...14 AWG)
Flexible without ferrule		mm ²	0.12...2.5 (26...14 AWG)
Massive		mm ²	0.12...2.5 (26...14 AWG)

Environmental compatibility

Ambient temperature, operation		°C	-25 - +70
Ambient temperature, full load		°C	0 - +60 (without derating)

Ambient temperature, storage	°C	- 40 - + 85
Climatic proofing		to IEC 60068-2-3, 93% at +40 °C, no condensation
Overvoltage category/pollution degree		according to EN 50178; 2
Climatic class (IEC)		according EN 60721; 3K3
Vibrations (IEC/EN 60068-2-6)		1...57 Hz, amplitude ± 0.075 mm; 57...100 Hz, 5 g
Mechanical shock resistance (IEC 60068-2-27)		30 g all directions

Insulation voltage

Inputs/outputs		3 kV AC (type test), 1.2 kV AC (routine test)
Input		1.5 kV AC (type test), 1.2 kV AC (routine test)
Output		350 V AC (routine test)

Electromagnetic compatibility (EMC)

Interference immunity			EN 61000-6-2
ESD	Air/contact discharge	kV	according to EN 61000-4-2, level 4-8KV/15KV
RFI			according to EN 61000-4-3, level 3-10 V/m
Burst			according to EN 61000-4-4, level 4-4 KV
Surge			according to EN 61000-4-5, level 4-2KV symmetrical, Level 3-3KV asymmetrical
Cable-born HF			according to EN 61000-4-6, level 3-10 V
Emitted interference			EN 61000-6-3
Electromagnetic fields	(0.08...1) / (1,4...2) / (2...2,7) GHz	V/m	according to EN 55022, Class B
Cable-born HF			according to EN 55022, Class B

Input circuit


Supply frequency			
Rated value		Hz	50/60
Range		Hz	47 - 63
Current consumption			
At 110 ... 240 V AC		A	Approx. 2.2...1.2
Power consumption		W	Normally 135
Inrush current limiter/ i^2t (cold start)			≈ 23 A / ca. 0.9 A ² s
Mains failure bridging		ms	typ. ≈ 100
Run-up time after mains voltage applied		ms	Normally ≈ 100
Transient overvoltage protection			Varistors
Internal input fuse (device protection, not accessible)			4 AT
Discharge current to PE		mA	< 3.5 mA

Output circuit

L+, L+, L-, L-			Proof against short-circuit, no-load and overload
Rated output power		W	120
Rated output current $T_u \approx 60$ °C		A	5
Peak output current (power reserves) $T_u \approx 40$ °C		A	Normally ≈ 7.25
Derating 60 °C $\approx T_u \approx 70$ °C			2.5 % per Kelvin temperature increase
Control deviation at			
Load change 10...90 %, static		Normally	± 0.1 %
Load change 10...90 %, dynamic		Normally	± 3 %
Controller acting time		ms	Normally 1
Input voltage deviation ± 10 %			Normally ± 0.05 %
Rise time 10...90 %		ms	Normally ≈ 30
Residual ripple and switching peaks			20 MHz typically < 50 mV _{ss}
Can be switched in parallel			yes, up to 5 devices for redundancy and for power increase, non symmetrical current
Series connection capability			yes, for voltage increase (max. 2 off)
Resistance to reverse feed			yes, limited to approx. 35 V AC
Power factor correction (PFC)			No
Status indication			OUTPUT OK: LED green

Overload characteristics			→ AWA2727-2317 (www.moeller.net/support)
Behaviour on short-circuit			continuously with current limitation
Current limitation at short-circuit		A	Approx. 11
Short-circuit protection			Proof against sustained short circuit
Overload protection			thermal protection
Capacitive load starting			Not restricted

Notes

At U  264 V DC additionally suitable, use external fuse.

Design verification as per IEC/EN 61439


Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	0
Heat dissipation per pole, current-dependent	P_{vid}	W	0
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	P_{vs}	W	15
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
Meets the product standard's requirements.			
10.2.3.1 Verification of thermal stability of enclosures			
Meets the product standard's requirements.			
10.2.3.2 Verification of resistance of insulating materials to normal heat			
Meets the product standard's requirements.			
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
Meets the product standard's requirements.			
10.2.4 Resistance to ultra-violet (UV) radiation			
Meets the product standard's requirements.			
10.2.5 Lifting			
Does not apply, since the entire switchgear needs to be evaluated.			
10.2.6 Mechanical impact			
Does not apply, since the entire switchgear needs to be evaluated.			
10.2.7 Inscriptions			
Meets the product standard's requirements.			
10.3 Degree of protection of ASSEMBLIES			
Meets the product standard's requirements.			
10.4 Clearances and creepage distances			
Meets the product standard's requirements.			
10.5 Protection against electric shock			
Does not apply, since the entire switchgear needs to be evaluated.			
10.6 Incorporation of switching devices and components			
Does not apply, since the entire switchgear needs to be evaluated.			
10.7 Internal electrical circuits and connections			
Is the panel builder's responsibility.			
10.8 Connections for external conductors			
Is the panel builder's responsibility.			
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			
Is the panel builder's responsibility.			
10.9.3 Impulse withstand voltage			
Is the panel builder's responsibility.			
10.9.4 Testing of enclosures made of insulating material			
Is the panel builder's responsibility.			
10.10 Temperature rise			
The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.			
10.11 Short-circuit rating			
Is the panel builder's responsibility.			
10.12 Electromagnetic compatibility			
Is the panel builder's responsibility.			
10.13 Mechanical function			
The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.			

Technical data ETIM 6.0

PLC's (EG000024) / PLC system power supply (EC000599)			
Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / SPS system power supply (ecl@ss8.1-27-24-22-09 [AKE532011])			
Input voltage at AC 50 Hz		V	85 - 264
Input voltage at AC 60 Hz		V	85 - 264
Input voltage at DC		V	100 - 350
Type of voltage (input voltage)			AC/DC
Max. input current AC 50 Hz		A	2.2
Max. input current AC 60 Hz		A	2.2

Max. input current DC	A	1.35
Type of output voltage		DC
Output voltage at AC 50 Hz	V	0 - 0
Output voltage at AC 60 Hz	V	0 - 0
Output voltage at DC	V	0 - 0
Max. output current AC 50 Hz	A	0
Max. output current AC 60 Hz	A	0
Max. output current DC	A	5
Redundancy		Yes
Suitable for safety functions		Yes
Width	mm	130
Height	mm	130
Depth	mm	57

Dimensions

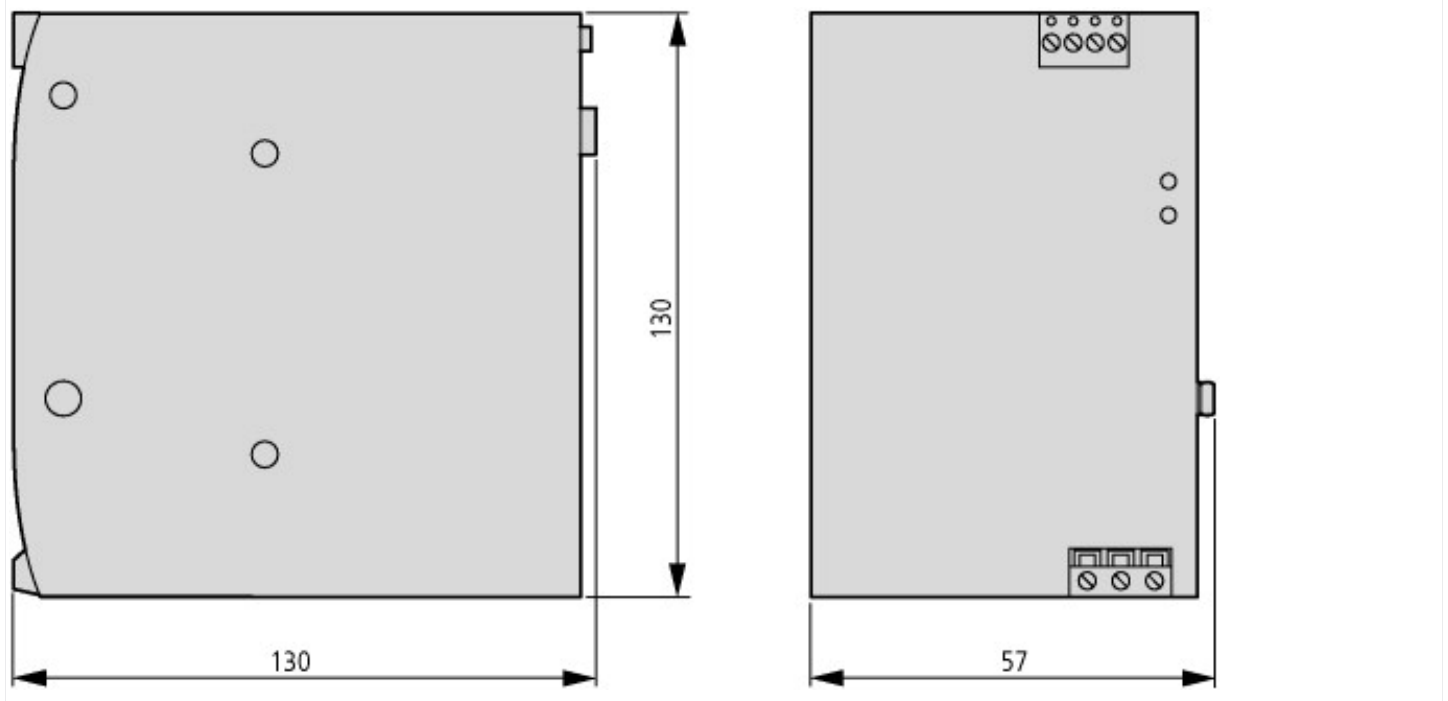

Additional product information (links)

IL05012004Z Power supply unit

IL05012004Z Power supply unit

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05012004Z2011_02.pdf