






**Main switch, 6 pole, 32 A, STOP function, 90 °, Lockable in the 0 (Off) position, rear mounting**

**Part no. T3-3-8342/V/SVB-SW**  
**Article no. 078445**

## Delivery program

|  |                |                 |  |
|--|----------------|-----------------|--|
| Product range                          |                |                 | Main switch<br>maintenance switch<br>Repair switch                                   |
| Part group reference                   |                |                 | T3   |
| Stop Function                          |                |                 | STOP function<br>With black rotary handle and locking ring                           |
| Number of poles                        |                |                 | 6 pole   |
| Locking facility                       |                |                 | Lockable in the 0 (Off) position   |
| Degree of Protection                   |                |                 | Front IP65   |
| Design                                 |                |                 | rear mounting  |
|  |                |                 |    |
| Contact sequence                       |                |                 |    |
| Switching angle                        |                | °               | 90   |
| Function                               |                |                 |  |
| <b>Motor rating AC-23A, 50 - 60 Hz</b> |                |                 |  |
| 400 V                                  | P              | kW              | 15   |
| Rated uninterrupted current            | I <sub>u</sub> | A               | 32   |
| Number of contact units                |                | contact unit(s) | 3  |

## Technical data

### General

|   |                  |      |  |
|---|------------------|------|--|
| Standards   |                  |      | IEC/EN 60947, VDE 0660, IEC/EN 60204, CSA, UL<br>Switch-disconnector according to IEC/EN 60947-3 |
| Climatic proofing   |                  |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30                   |
| Ambient temperature   |                  |      |  |
| Open  |                  | °C   | -25 - +50  |
| Enclosed  |                  | °C   | -25 - +40  |
| Overvoltage category/pollution degree                                 |                  |      | III/3  |
| Rated impulse withstand voltage                                       | U <sub>imp</sub> | V AC | 6000   |
| Mechanical shock resistance   |                  | g    | 15   |
| Mounting position   |                  |      | As required  |
| Protection against direct contact when actuated from front (EN 50274) |                  |      | Finger and back-of-hand proof  |

### Contacts

|                            |                |      |        |
|----------------------------|----------------|------|--------|
| Mechanical variables       |                |      |        |
| Number of poles            |                |      | 6 pole |
| Electrical characteristics |                |      |        |
| Rated operational voltage  | U <sub>e</sub> | V AC | 690    |

|   |          |              |  |
|---|----------|--------------|--|
| Rated uninterrupted current                         | $I_U$    | A            | 32   |
| Note on rated uninterrupted current $I_U$           |          |              | Rated uninterrupted current $I_U$ is specified for max. cross-section. |
| Load rating with intermittent operation, class 12   |          |              |  |
| AB 25 % DF  |          | $\times I_e$ | 2  |
| AB 40 % DF  |          | $\times I_e$ | 1.6  |
| AB 60 % DF  |          | $\times I_e$ | 1.3  |
| Short-circuit rating                                |          |              |  |
| Fuse  |          | A gG/gL      | 35   |
| Rated short-time withstand current (1 s current)    | $I_{cw}$ | $A_{rms}$    | 650  |
| Note on rated short-time withstand current $I_{cw}$ |          |              | Current for a time of 1 second   |
| Rated conditional short-circuit current             | $I_q$    | kA           | 1  |

### Switching capacity

|  |              |               |       |
|--|--------------|---------------|-------|
| $\cos \varphi$ rated making capacity as per IEC 60947-3        |              | A             | 320   |
| Rated breaking capacity $\cos \varphi$ to IEC 60947-3          |              | A             |       |
| 230 V  |              | A             | 260   |
| 400/415 V  |              | A             | 260   |
| 500 V  |              | A             | 240   |
| 690 V  |              | A             | 170   |
| Safe isolation to EN 61140                                     |              |               |       |
| between the contacts   |              | V AC          | 440   |
| Current heat loss per contact at $I_e$                         |              | W             | 1.1   |
| Current heat loss per auxiliary circuit at $I_e$ (AC-15/230 V) |              | CO            | 1.1   |
| Lifespan, mechanical   | Operations   | $\times 10^6$ | > 0.5 |
| Maximum operating frequency                                    | Operations/h |               | 1200  |
| AC   |              |               |       |
| AC-3   |              |               |       |
| Rating, motor load switch                                      | P            | kW            |       |
| 220 V 230 V  | P            | kW            | 5.5   |
| 230 V Star-delta   | P            | kW            | 7.5   |
| 400 V 415 V  | P            | kW            | 11    |
| 400 V Star-delta   | P            | kW            | 15    |
| 500 V  | P            | kW            | 15    |
| 500 V Star-delta   | P            | kW            | 18.5  |
| 690 V  | P            | kW            | 11    |
| 690 V Star-delta   | P            | kW            | 22    |
| Rated operational current motor load switch                    |              |               |       |
| 230 V  | $I_e$        | A             | 23.7  |
| 230 V star-delta   | $I_e$        | A             | 32    |
| 400V 415 V   | $I_e$        | A             | 23.7  |
| 400 V star-delta   | $I_e$        | A             | 32    |
| 500 V  | $I_e$        | A             | 23.7  |
| 500 V star-delta   | $I_e$        | A             | 32    |
| 690 V  | $I_e$        | A             | 14.7  |
| 690 V star-delta   | $I_e$        | A             | 25.5  |
| AC-21A   |              |               |       |
| Rated operational current switch                               |              |               |       |
| 440 V  | $I_e$        | A             | 32    |
| AC-23A   |              |               |       |
| Motor rating AC-23A, 50 - 60 Hz                                | P            | kW            |       |
| 230 V  | P            | kW            | 7.5   |
| 400 V 415 V  | P            | kW            | 15    |
| 500 V  | P            | kW            | 15    |
| 690 V  | P            | kW            | 15    |
| Rated operational current motor load switch                    |              |               |       |

|   |                   |          |  |
|---|-------------------|----------|--|
| 230 V   | $I_e$             | A        | 32   |
| 400 V 415 V                                   | $I_e$             | A        | 32   |
| 500 V   | $I_e$             | A        | 26.4   |
| 690 V   | $I_e$             | A        | 17   |
| <b>DC</b>                                     |                   |          |  |
| DC-1, Load-break switches L/R = 1 ms          |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 25   |
| Voltage per contact pair in series            |                   | V        | 60   |
| DC-21A  |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 1  |
| Contacts                                      |                   | Quantity | 1  |
| DC-23A, motor load switch L/R = 15 ms         |                   |          |  |
| 24 V  |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 25   |
| Contacts                                      |                   | Quantity | 1  |
| 48 V  |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 25   |
| Contacts                                      |                   | Quantity | 2  |
| 60 V  |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 25   |
| Contacts                                      |                   | Quantity | 3  |
| 120 V   |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 12   |
| Contacts                                      |                   | Quantity | 3  |
| 240 V   |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 5  |
| Contacts                                      |                   | Quantity | 5  |
| DC-13, Control switches L/R = 50 ms           |                   |          |  |
| Rated operational current                     | $I_e$             | A        | 20   |
| Voltage per contact pair in series            |                   | V        | 24   |
| Control circuit reliability at 24 V DC, 10 mA | Fault probability | $H_F$    | $< 10^{-5}$ , < 1 fault in 100000 operations |

### Terminal capacities

|                                     |  |                 |                                  |
|-------------------------------------|--|-----------------|----------------------------------|
| Solid or stranded                   |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)       |
| Flexible with ferrules to DIN 46228 |  | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 4) |
| Terminal screw                      |  |                 | M4                               |
| Max. tightening torque              |  | Nm              | 1.6                              |

### Technical safety parameters:

|              |  |  |   |
|--------------|--|--|---|
| <b>Notes</b> |  |  | B10 <sub>d</sub> values as per EN ISO 13849-1, table C1 |
|--------------|--|--|---|

### Rating data for approved types

|                                  |       |      |                |
|----------------------------------|-------|------|----------------|
| <b>Contacts</b>                  |       |      |                |
| Rated operational voltage        | $U_e$ | V AC | 600            |
| Rated uninterrupted current max. |       |      |                |
| Main conducting paths            |       |      |                |
| General use                      | $I_U$ | A    | 25             |
| Auxiliary contacts               |       |      |                |
| General Use                      | $I_U$ | A    | 10             |
| Pilot Duty                       |       |      | A 600<br>P 600 |
| <b>Switching capacity</b>        |       |      |                |
| Maximum motor rating             |       |      |                |
| Single-phase                     |       |      |                |
| 120 V AC                         |       | HP   | 1.5            |
| 200 V AC                         |       | HP   | 3              |

|  |       |             |
|--|-------|-------------|
| 240 V AC                                 | HP    | 3           |
| Three-phase                              |       |             |
| 200 V AC                                 | HP    | 3           |
| 240 V AC                                 | HP    | 3           |
| 480 V AC                                 | HP    | 7.5         |
| 600 V AC                                 | HP    | 10          |
| Short Circuit Current Rating             | SCCR  |             |
| Basic Rating                             | kA    | 5           |
| max. Fuse                                | A     | 40          |
| High fault rating                        | kA    | 10          |
| max. Fuse                                | A     | 40, Class J |
| Terminal capacity                        |       |             |
| Solid or flexible conductor with ferrule | AWG   | 14 - 10     |
| Terminal screw                           |       | M4          |
| Tightening torque                        | lb-in | 17.6        |

## Design verification as per IEC/EN 61439

|  |            |    |  |
|--|------------|----|--|
| Technical data for design verification   |            |    |  |
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 32   |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 1.1  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 0  |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 0  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 50   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Please enquire   |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 6.0


Low-voltage industrial components (EG000017) / Switch disconnecter (EC000216)

|   |    |  |
|---|----|--|
| Version as main switch                                  |    | Yes                                      |
| Version as maintenance-/service switch                  |    | Yes                                      |
| Version as safety switch                                |    | No                                       |
| Version as emergency stop installation                  |    | No                                       |
| Version as reversing switch                             |    | No                                       |
| Max. rated operation voltage Ue AC                      | V  | 690                                      |
| Rated operating voltage                                 | V  | 690 - 690                                |
| Rated permanent current Iu                              | A  | 32                                       |
| Rated permanent current at AC-21, 400 V                 | A  | 32                                       |
| Rated operation power at AC-3, 400 V                    | kW | 11                                       |
| Rated short-time withstand current Icw                  | kA | 0.65                                     |
| Rated operation power at AC-23, 400 V                   | kW | 15                                       |
| Switching power at 400 V                                | kW | 15                                       |
| Conditioned rated short-circuit current Iq              | kA | 1  |
| Number of poles   |    | 6  |
| Number of auxiliary contacts as normally closed contact |    | 0  |
| Number of auxiliary contacts as normally open contact   |    | 0  |
| Number of auxiliary contacts as change-over contact     |    | 0  |
| Motor drive optional                                    |    | No                                       |
| Motor drive integrated                                  |    | No                                       |
| Voltage release optional                                |    | No                                       |
| Device construction                                     |    | Built-in device fixed built-in technique |
| Suitable for ground mounting                            |    | Yes                                      |
| Suitable for front mounting 4-hole                      |    | No                                       |
| Suitable for front mounting center                      |    | No                                       |
| Suitable for distribution board installation            |    | No                                       |
| Suitable for intermediate mounting                      |    | Yes                                      |
| Colour control element                                  |    | Black                                    |
| Type of control element                                 |    | Door coupling rotary drive               |
| Interlockable   |    | Yes                                      |
| Type of electrical connection of main circuit           |    | Screw connection                         |
| Degree of protection (IP), front side                   |    | IP65                                     |


## Approvals

|                             |  |   |
|-----------------------------|--|---|
| Product Standards           |  | UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking |
| UL File No.                 |  | E36332  |
| UL Category Control No.     |  | NLRV  |
| CSA File No.                |  | 12528   |
| CSA Class No.               |  | 3211-05   |
| North America Certification |  | UL listed, CSA certified  |
| Suitable for                |  | Branch circuits, suitable as motor disconnect                             |
| Degree of Protection        |  | IEC: IP65; UL/CSA Type 1, 12  |

## Dimensions

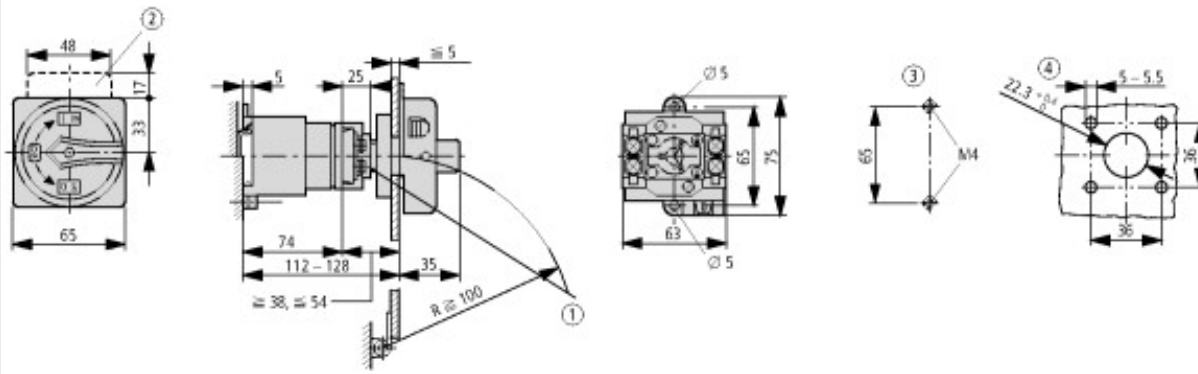

- ① Shaft and interlock extension with ZAV-P3 + ZVV-P3 possible; max. 4 x 25 = 100 mm
- ② ZFS-... Label mount not included as standard
- ③ Drilling dimensions base
- ④ Drilling dimensions door

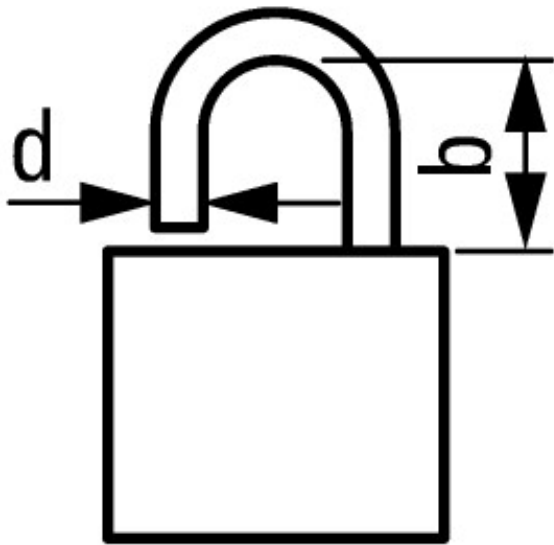


**$d = 4 - 8 \text{ mm}$**

**$b + d \leq 47 \text{ mm}$**

**$d = 0.16 - 0.31''$**

**$b + d \leq 1.85''$**

 3 padlocks

## Additional product information (links)

### IL03801021Z (AWA1150-0587) Cam switch: Rear mounting

|  |   |
|--|---|
| IL03801021Z (AWA1150-0587) Cam switch: Rear mounting | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801021Z2016_07.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801021Z2016_07.pdf</a>                           |
| Form for ordering non-standard front plates          | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=4.87">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=4.87</a>   |
| Display flip catalog page.                           | <a href="http://ecat.moeller.net/flip-cat/?edition=K115A&amp;startpage=41">http://ecat.moeller.net/flip-cat/?edition=K115A&amp;startpage=41</a>   |
| Technical overview cam switch, switch-disconnector   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2</a>                                     |
| System overview cam switch T                         | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4</a>                                     |
| System overview switch-disconnector P                | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6</a>                                     |
| Key to part numbers Cam switch                       | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Key to part numbers Switch-disconnector              | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Switches for ATEX                                    | <a href="http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html">http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html</a> |