



Fuse-link, NH00, 63A, 500 V, gL/gG

Part no.  
Article no.

Z-NH-00/63  
290005

Similar to illustration

## Delivery program


Product range			60 mm system 185 mm system
Basic function			Low-voltage h.b.c. fuse links
			Insulation body made from Steatite/Corderite Copper contact blade with silver coating, corrosion proof Pivoting and central indicator, live grip tabs Selectivity from 1:1.6
Frame size			00
Rated operational current	$I_e$	A	63


## Technical data

### Electrical

Standards			IEC 60269 VDE 0636 SEV1086
Rated operational voltage	$U_e$	V	
	$U_e$	V AC	
Rated operating voltage	$U_e$	V AC	500
Rated frequency	f	Hz	45 – 62
Rated frequency	f	Hz	45 – 62

# Characteristics

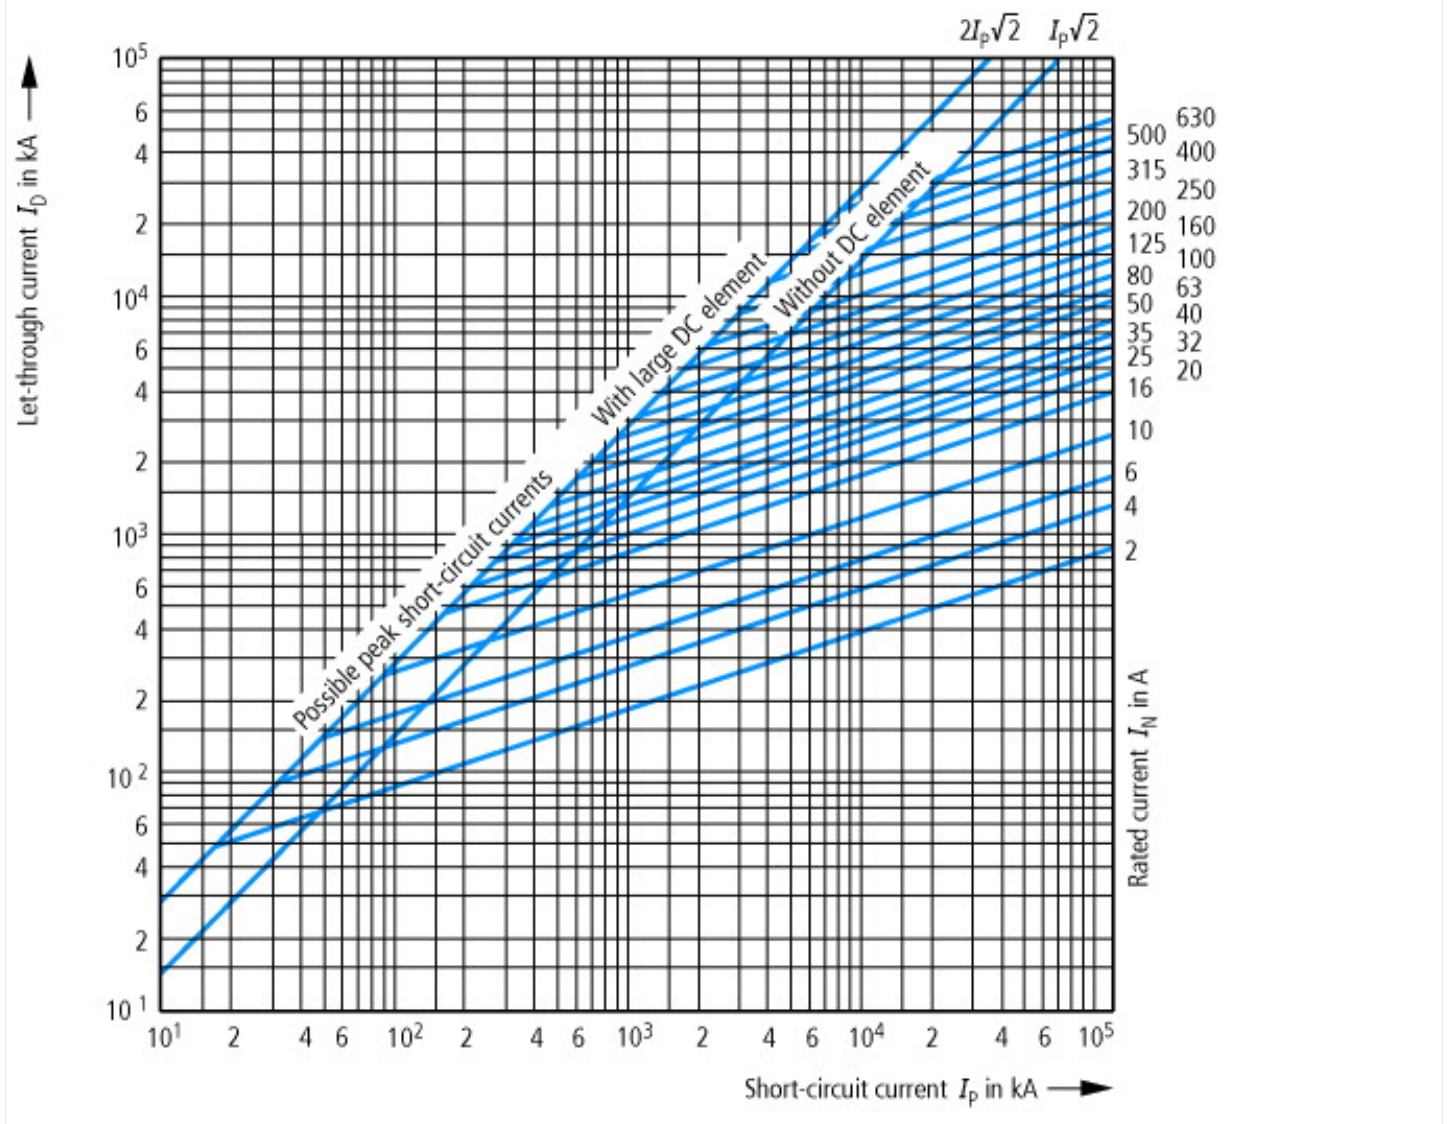

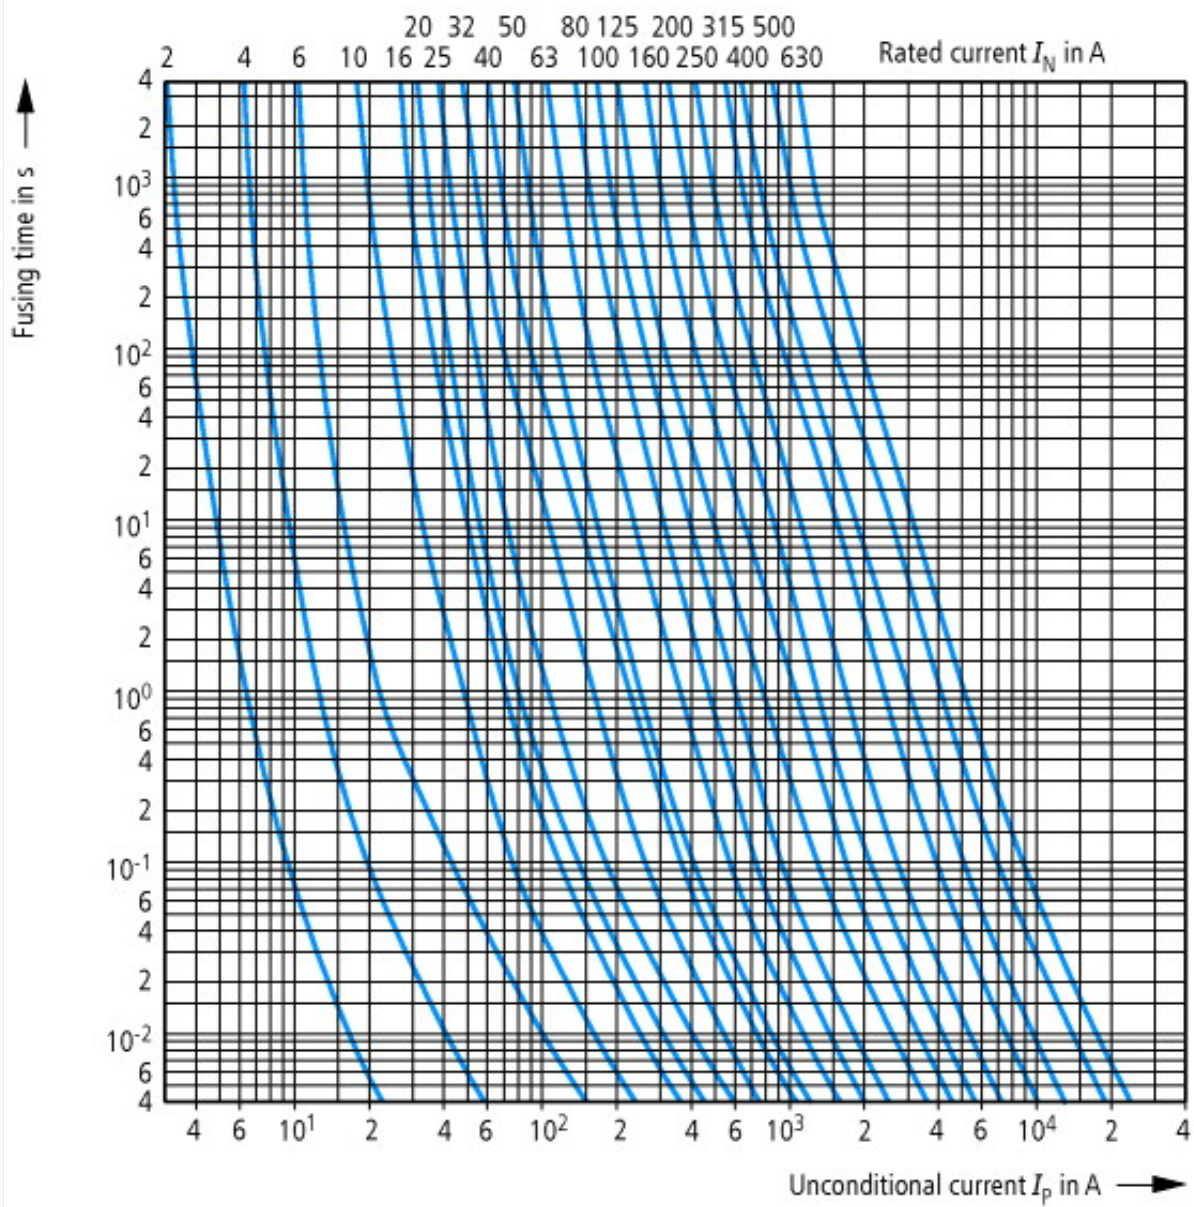

Time-current characteristic

## Dimensions

