



Fuse-link with blink application, D01, 10A, 400 V, gL/gG, set consists of 3 pcs.



Powering Business Worldwide™

**Part no.** Z-SLS/E-10A  
**Article no.** 269006

Similar to illustration

## Delivery program

Product range			Fuse material
Basic function			Accessories
Basic function			Fuse sets
For use with			Z-SLS/NEOZ Z-SLK/NEOZ Z-SLS/CEK
			Snap-fit on DIN rail 1 set consists of: 3 fuse-links, 3 current codings, 1 plastic box in the colour of the indicator
Rated operating voltage			400 V AC, 220 V DC

## Technical data


### Electrical

Rated operational voltage	$U_e$	V	
Rated operating voltage	$U_e$	V AC	400
		V DC	220
Utilization category			gG (gL)
Test voltage		kV	5

## Technical data ETIM 6.0

Circuit breakers and fuses (EG000020) / D0-system fuse link (EC001642)			
Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse systems / Neozed fuse link (ecl@ss8.1-27-14-21-19 [ACN353008])			
Construction size			D01
Nominal rated current		A	10
Nominal rated voltage		V	400
Colour code			Red
Utilization category			gL/gG (cable protection/equipment protection)

## Characteristics

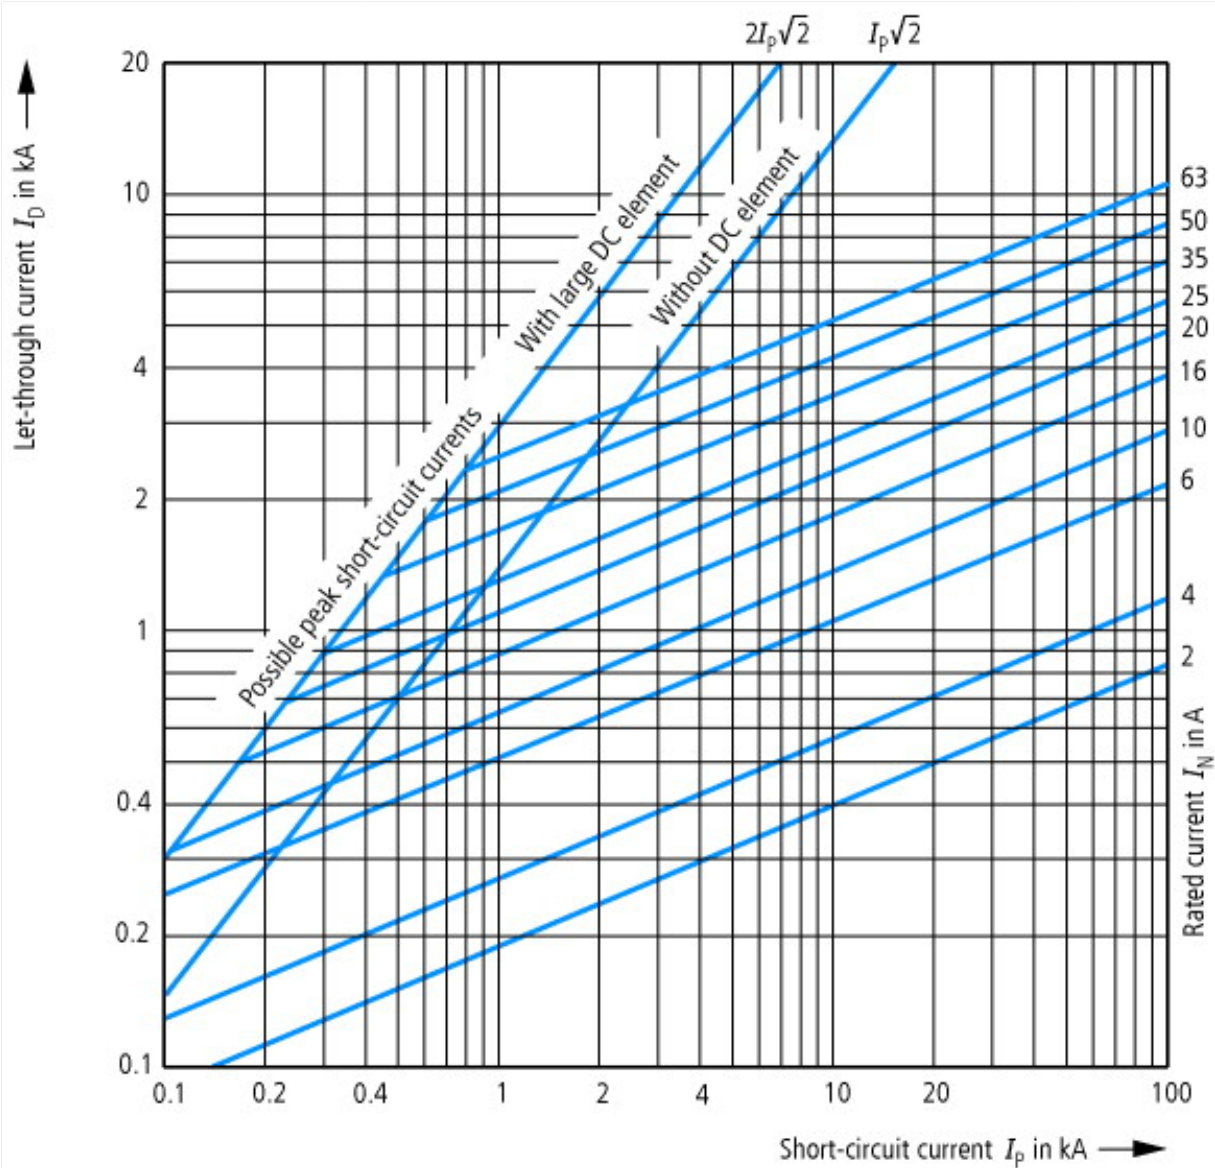

Let-through current characteristic, D0 fuse links 2...63 A gG(gL)



Time/current characteristic, D0 fuse links 2...63 A gG(gL)