



Fuse-link with blink application, D02, 40A, 400 V, gL/gG, set consists of 3 pcs.



Powering Business Worldwide™

Part no. Z-SLS/E-40A
Article no. 289990

Similar to illustration

Delivery program

Product range			Fuse material
Basic function			Accessories
Basic function			Fuse sets
For use with			Z-SLS/NEOZ Z-SLK/NEOZ Z-SLS/CEK
			Snap-fit on DIN rail 1 set consists of: 3 fuse-links, 3 current codings, 1 plastic box in the colour of the indicator
Rated operating voltage			400 V AC, 220 V DC

Technical data


Electrical

Rated operational voltage	U_e	V	
Rated operating voltage	U_e	V AC	400
		V DC	220
Utilization category			gG (gL)
Test voltage		kV	5


Technical data ETIM 6.0

Circuit breakers and fuses (EG000020) / D0-system fuse link (EC001642)			
Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse systems / Neozed fuse link (ecl@ss8.1-27-14-21-19 [ACN353008])			
Construction size			D02
Nominal rated current		A	40
Nominal rated voltage		V	400
Colour code			Black
Utilization category			gL/gG (cable protection/equipment protection)

Characteristics

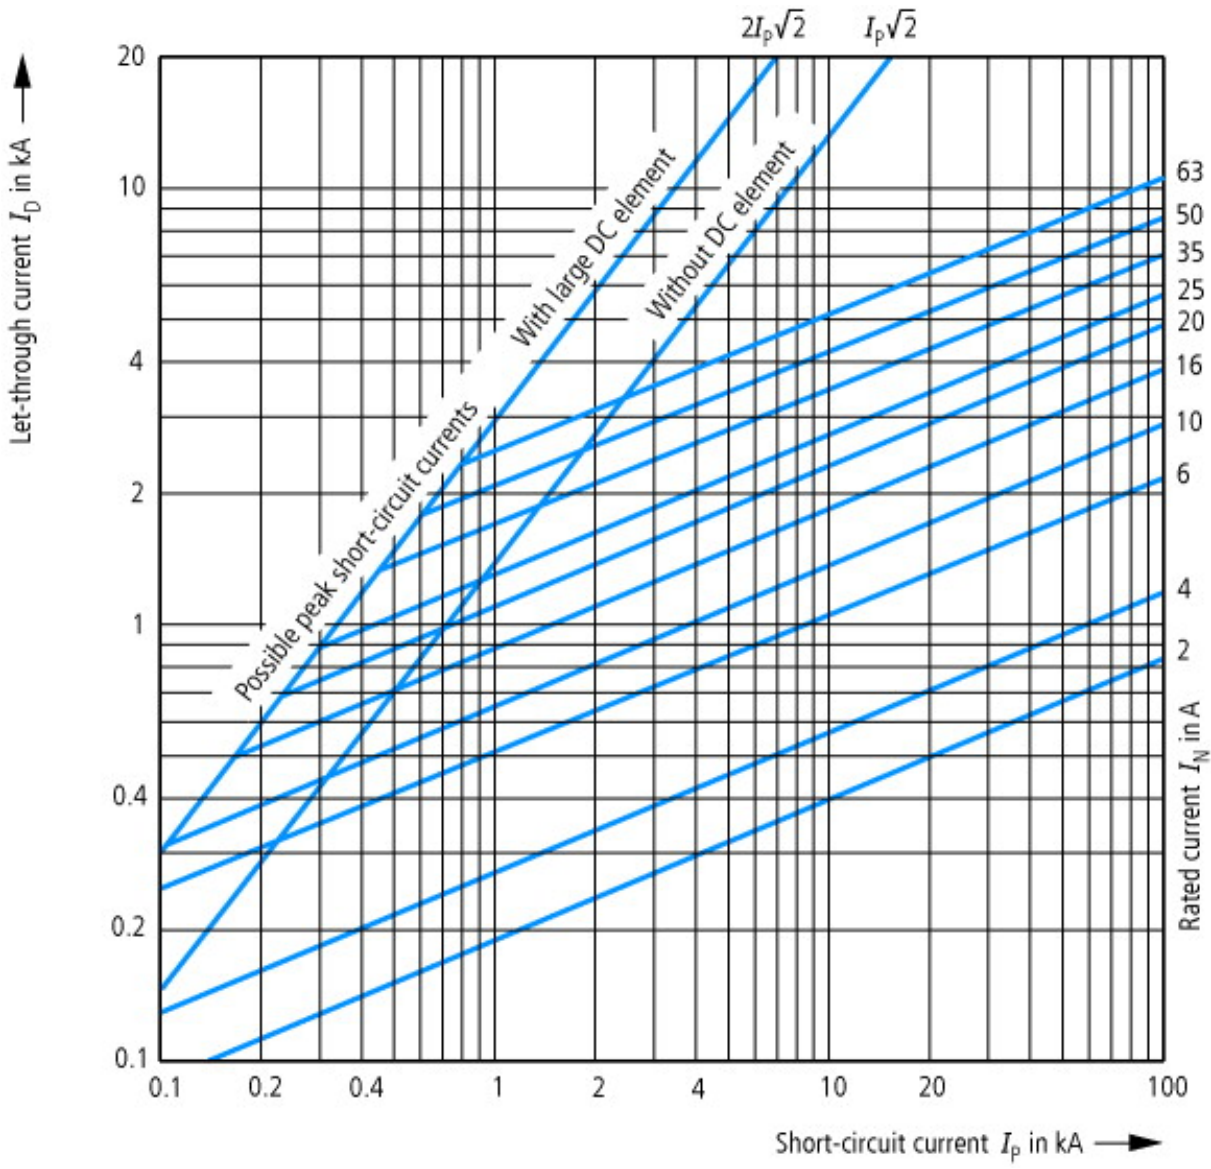

Let-through current characteristic, D0 fuse links 2...63 A gG(gL)

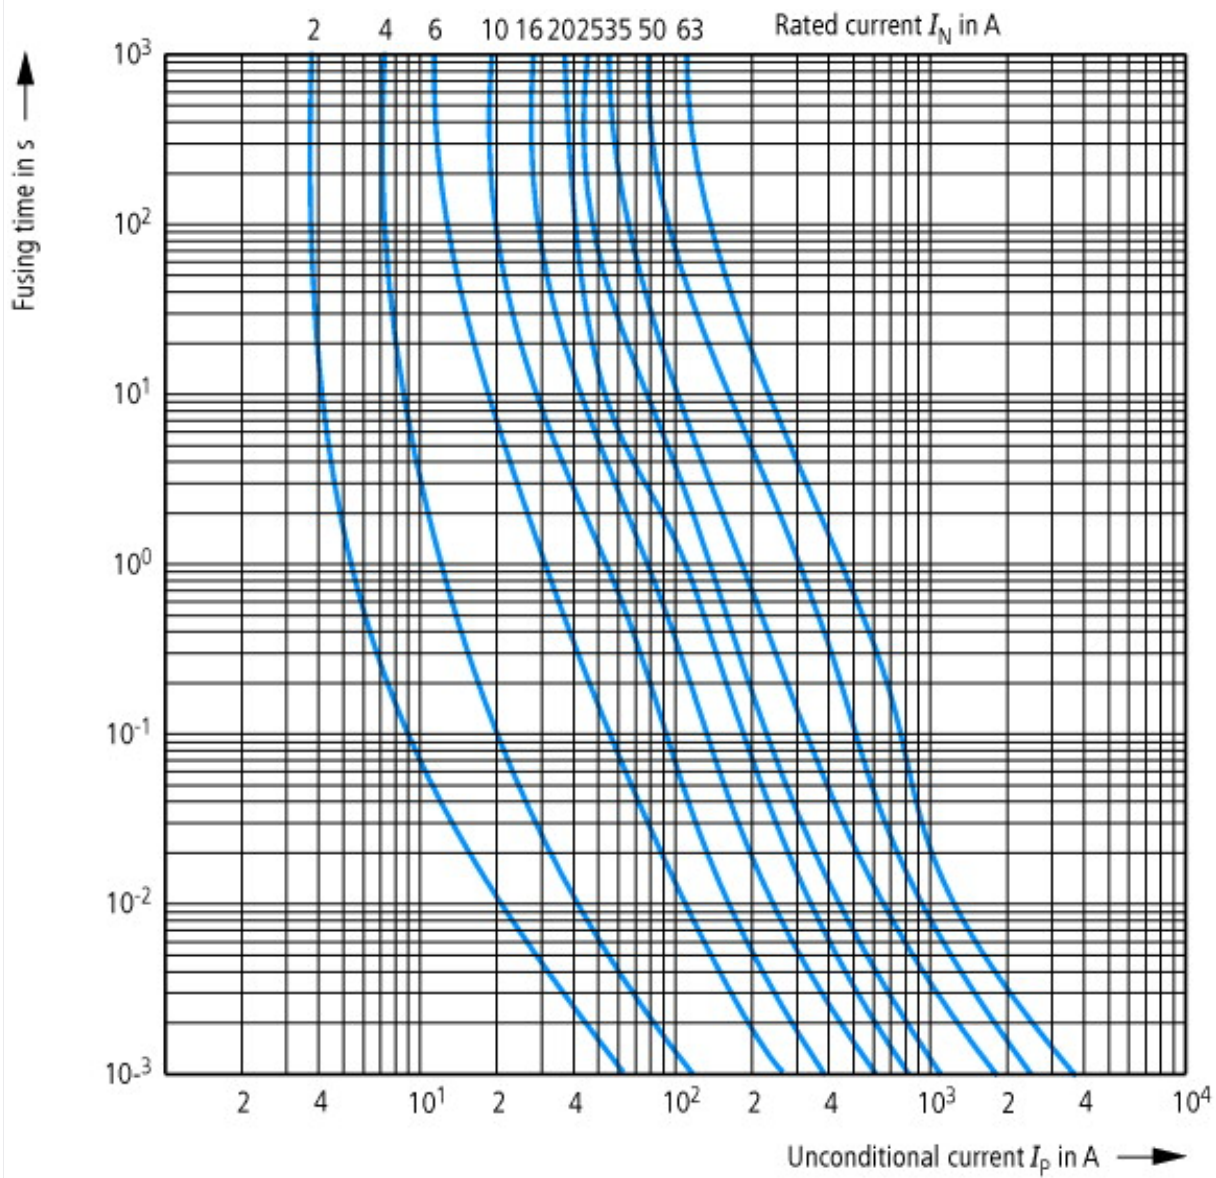

Time/current characteristic, D0 fuse links 2...63 A gG(gL)