

2285331

https://www.phoenixcontact.com/us/products/2285331

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



19" socket strip, color: green, contact surface: Tin, number of positions: 32, product range: SFL (2,8-0,8), pitch: 0 mm, type of packaging: packed in cardboard

#### Commercial data

| Item number                          | 2285331                        |
|--------------------------------------|--------------------------------|
| Packing unit                         | 10 pc                          |
| Minimum order quantity               | 10 pc                          |
| Note                                 | Made to order (non-returnable) |
| Sales key                            | AA08                           |
| Product key                          | AAHHCA                         |
| Catalog page                         | Page 279 (CC-2002)             |
| GTIN                                 | 4017918055936                  |
| Weight per piece (including packing) | 34.97 g                        |
| Weight per piece (excluding packing) | 34.97 g                        |
| Customs tariff number                | 85369010                       |
| Country of origin                    | PL                             |



2285331

https://www.phoenixcontact.com/us/products/2285331

#### Technical data

#### Notes

| General | The rated insulation voltage applies to fully insulated slip-on sleeves. |
|---------|--------------------------------------------------------------------------|
|         |                                                                          |

#### Product properties

| Туре                | F                |
|---------------------|------------------|
| Product type        | 19" socket strip |
| Product family      | SFL (2,8-0,8)    |
| Number of positions | 32               |
| Pitch               | 0 mm             |


#### Electrical properties

| Rated surge voltage (III/3) | 2 E IA / |  |
|-----------------------------|----------|--|
| Rated surge voltage (III/3) | 2.5 KV   |  |

#### Connection data

| Connection method | Spade connection |
|-------------------|------------------|

#### **Dimensions**

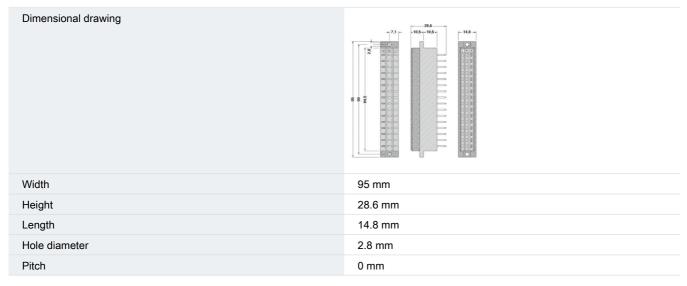

#### Material specifications

| Color                                  | green  |
|----------------------------------------|--------|
| Flammability rating according to UL 94 | НВ     |
| Insulating material group              | II     |
| Insulating material                    | PA-F   |
| Contact surface                        | Tin Sn |

### Packaging specifications

| Type of packaging | packed in cardboard |
|-------------------|---------------------|



2285331

https://www.phoenixcontact.com/us/products/2285331

## Classifications

#### **ECLASS**

|        | ECLASS-11.0 | 27460101 |
|--------|-------------|----------|
|        | ECLASS-12.0 | 27460101 |
|        | ECLASS-13.0 | 27460101 |
| ETIM   |             |          |
|        | ETIM 9.0    | EC002643 |
| UNSPSC |             |          |
|        | UNSPSC 21.0 | 39121400 |



2285331

https://www.phoenixcontact.com/us/products/2285331

## Environmental product compliance

| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|------------|---------------------------------------------------------|
|            | No hazardous substances above threshold values          |

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com