

## Socket strip - SFLY 2,5/D32 - 2285467

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



19" socket strip, nominal cross section: 2.5 mm<sup>2</sup>, color: green, nominal current: 4 A, contact surface: Gold, type of contact: Female connector, Number of potentials: 32, Number of positions per row: 32, number of connections: 32, product range: SFLY 2,5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, plug-in system: IEC 60603 Connectors - Type D, type of packaging: packed in cardboard

### Your advantages

- Easy field connection to connectors according to IEC 60603/DIN 41617
- Well-known connection principle allows worldwide use
- Low temperature rise, thanks to maximum contact force



### Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 017918 055943
GTIN	4017918055943
Weight per Piece (excluding packing)	87.700 g
Custom tariff number	85369010
Country of origin	Poland

### Technical data

#### Dimensions

Length	39.8 mm
Height	32.4 mm
Width	95 mm
Pitch	5.08 mm
Hole diameter	2.8 mm

## Socket strip - SFLY 2,5/D32 - 2285467

### Technical data

#### General

Range of articles	SFLY 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current $I_N$	4 A
Nominal voltage $U_N$	250 V
Nominal cross section	2.5 mm <sup>2</sup>
Insulating material	PA
Flammability rating according to UL 94	V2
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	32

#### Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V2


#### Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

### Drawings

# Socket strip - SFLY 2,5/D32 - 2285467

Dimensional drawing

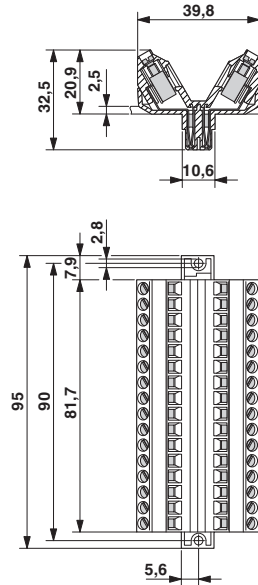

## Classifications

### eCl@ss

eCl@ss 10.0.1	27440401
eCl@ss 11.0	27460101
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27261100
eCl@ss 6.0	27261100
eCl@ss 7.0	27440401
eCl@ss 9.0	27440401

### ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002498
ETIM 6.0	EC002643
ETIM 7.0	EC002643

### UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409

## Socket strip - SFLY 2,5/D32 - 2285467

### Classifications

#### UNSPSC

UNSPSC 12.01	39121409
UNSPSC 13.2	39121432
UNSPSC 18.0	39121432
UNSPSC 19.0	39121432
UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

### Approvals

#### Approvals

---

Approvals


EAC

---

Ex Approvals

---

#### Approval details

EAC		B.01687
-----	---	---------

---