

Socket strip - SFLY 2,5/F32/ZB - 2285506

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



19" socket strip, nominal cross section: 2.5 mm², color: green, nominal current: 4 A, contact surface: Gold, type of contact: Female connector, Number of potentials: 32, Number of positions per row: 32, number of connections: 32, product range: SFLY 2,5, pitch: 5.08 mm, connection method: Screw connection with tension sleeve, plug-in system: IEC 60603 Connectors - Type D, type of packaging: packed in cardboard

Your advantages

- Easy field connection to connectors according to IEC 60603/DIN 41617
- Well-known connection principle allows worldwide use
- Low temperature rise, thanks to maximum contact force



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
GTIN	 4 017918 055967
GTIN	4017918055967
Weight per Piece (excluding packing)	94.300 g
Custom tariff number	85369010
Country of origin	Poland

Technical data

Dimensions

Length	40 mm
Height	35.5 mm
Width	95 mm
Pitch	5.08 mm
Hole diameter	2.8 mm

Socket strip - SFLY 2,5/F32/ZB - 2285506

Technical data

General

Range of articles	SFLY 2,5
Insulating material group	I
Rated surge voltage (III/3)	4 kV
Connection in acc. with standard	EN-VDE
Nominal current I_N	4 A
Nominal voltage U_N	250 V
Nominal cross section	2.5 mm ²
Insulating material	PA
Flammability rating according to UL 94	V2
Stripping length	8 mm
Screw thread	M3
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Number of positions	32

Standards and Regulations

Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V2


Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Socket strip - SFLY 2,5/F32/ZB - 2285506

Dimensional drawing

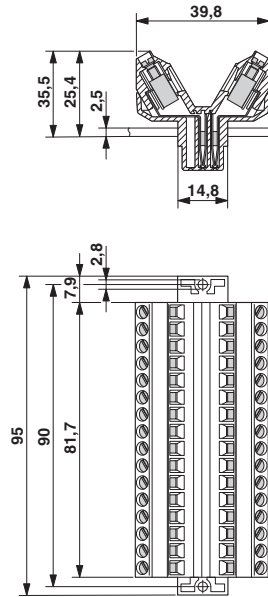

Classifications

eCl@ss

eCl@ss 10.0.1	27440401
eCl@ss 11.0	27460101
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27261100
eCl@ss 6.0	27261100
eCl@ss 7.0	27440401
eCl@ss 9.0	27440401

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002498
ETIM 6.0	EC002643
ETIM 7.0	EC002643

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409

Socket strip - SFLY 2,5/F32/ZB - 2285506

Classifications

UNSPSC

UNSPSC 12.01	39121409
UNSPSC 13.2	39121432
UNSPSC 18.0	39121432
UNSPSC 19.0	39121432
UNSPSC 20.0	39121432
UNSPSC 21.0	39121432

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01687
-----	---	---------
