

## LED enclosure light - PLD E 400 W 375 - 2702222

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



LED enclosure light, 24 V DC, color temperature 5000 K, length 375 mm, pivoting, can be switched in series, including mounting accessories

### Product Description


The LED light is designed to illuminate the interior of control cabinets. The prismatic integrated into the light cover ensures optimum illumination of the control cabinet. It enables tool-free assembly with the clip system. This allows several lights to be successively switched. The light can be switched on and off either via the integrated button or external door position switch.

### Your advantages

- ✓ Tool-free mounting, thanks to clip fastening
- ✓ Wiring via sensor/actuator cables with M8 snap-in technology
- ✓ Series connection reduces cabling effort for control cabinets arranged in series
- ✓ Optimum lighting of the control cabinet, thanks to integrated prismatic and capacity to swivel
- ✓ Swiveling enables optimum adjustment to the relevant control cabinet depth
- ✓ LED service life of 50,000 h (L70 value) prevents bulb replacement



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 057781
GTIN	4055626057781
Weight per Piece (excluding packing)	220.000 g
Custom tariff number	94054039
Country of origin	Germany

### Technical data

#### Note

# LED enclosure light - PLD E 400 W 375 - 2702222

## Technical data

### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

### Dimensions

Width	23 mm
Height	38 mm
Length	375 mm

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Permissible humidity (operation)	5 % ... 95 %
Permissible humidity (storage/transport)	5 % ... 95 %
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20

### General

Socket	none
Housing material	Plastic
Assembly instructions	Magnet attachment available as an accessory Screw fixings available as accessories
Color	traffic grey A RAL 7042
Net weight	170 g
Mounting type	Clip mounting
Mounting position	any

### Power supply for module electronics

Connection method	M8 connector (snap-in)
Number of positions	3
Supply voltage	24 V DC
Supply voltage range	19.2 V DC ... 30 V DC
Power consumption	3 W

### Connection data

Connection method	M8 connector (snap-in)
-------------------	------------------------

### Light properties

Source of light type	LED
Number of LEDs	12
Service life, lighting appliance	50,000 h (L70)

# LED enclosure light - PLD E 400 W 375 - 2702222

## Technical data

### Light properties

Light color	Neutral white
Color temperature / wavelength	5000 K
Color rendering index	75
Luminous flux	340 lm (Net luminous flux)
Illumination	max. 845 lx (50 cm distance)

### Standards and Regulations


Immunity to EF	Noise immunity test in accordance with EN 61000-6-2 Electromagnetic fields EN 61000-4-3/IEC 61000-4-3 Criterion A, Field intensity: 10 V/m
Immunity to burst	Noise immunity test in accordance with EN 61000-6-2 Fast transients (burst) EN 61000-4-4/IEC 61000-4-4 Criterion B, ±2 kV
Immunity to surge	Noise immunity test in accordance with EN 61000-6-2 Transient overvoltage (surge) EN 61000-4-5/IEC 61000-4-5 Criterion A, ±1 kV (symmetrical), ±2 kV (asymmetrical)
Immunity to conducted interference	Noise immunity test in accordance with EN 61000-6-2 Conducted interference EN 61000-4-6/IEC 61000-4-6 Criterion A, Test voltage 10 V
Interference emission	Noise emission test as per EN 61000-6-4 Radio interference properties EN 55011 Class A
Mechanical tests	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6 5g
	Shock in acc. with EN 60068-2-27/IEC 60068-2-27 25g, 11 ms period, half-sine shock pulse
	Continuous shock according to EN 60068-2-27/IEC 60068-2-27 10g
Protection class	III

### Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Connection diagram



Connection diagram



Connection of the supply voltage of a light

Forwarding of the supply voltage with the series connection of lights


# LED enclosure light - PLD E 400 W 375 - 2702222

Schematic diagram




Connection of a light

Connection diagram

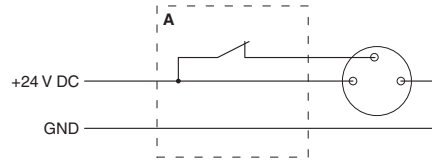


Connection of the light using a door position switch (A)

Schematic diagram





Series connection of two lights

Dimensional drawing

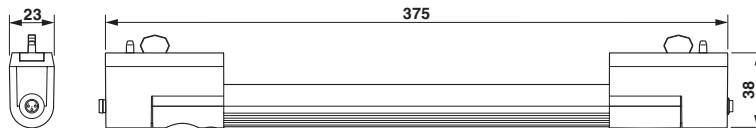

Dimensional drawing

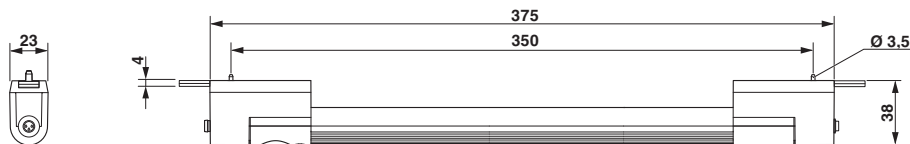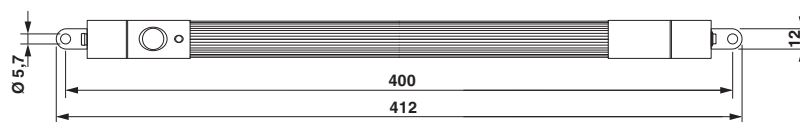

Dimensional drawing for screw mounting

## Classifications

eCl@ss

eCl@ss 10.0.1	27182808
---------------	----------

# LED enclosure light - PLD E 400 W 375 - 2702222

## Classifications

### eCl@ss

eCl@ss 11.0	27182808
eCl@ss 5.0	27189200
eCl@ss 5.1	27189200
eCl@ss 6.0	27189200
eCl@ss 7.0	27189241
eCl@ss 9.0	27189241

### ETIM

ETIM 4.0	EC000321
ETIM 6.0	EC000321
ETIM 7.0	EC000321

## Approvals


### Approvals


#### Approvals

UL Listed / UL Recognized / cUL Recognized / cUL Listed / cULus Recognized / cULus Listed

#### Ex Approvals


### Approval details


UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 362966
mm <sup>2</sup> /AWG/kcmil		30-14	

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 255026
mm <sup>2</sup> /AWG/kcmil		30-14	


# LED enclosure light - PLD E 400 W 375 - 2702222

## Approvals

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 255026
mm <sup>2</sup> /AWG/kcmil		30-14	

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 362966
mm <sup>2</sup> /AWG/kcmil		30-14	

cULus Recognized	
------------------	---

cULus Listed	
--------------	---