

## Interface card - 1771-CONTACT21/D25F - 2906375

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Allen-Bradley® PLC-5 migration board used to convert 1771 I/O and pre-wired 21-position swing arm (1771-WG, 1771-WH, 1771-WHF, or 1771WHFB) to 25-position (female) D-SUB socket.

### Your advantages

- Durable PCB designed to easily mount within 1771 chassis
- Terminal connection with locking tab
- Quick cable connection via D-SUB 25 female connector



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 365701
GTIN	4055626365701
Weight per Piece (excluding packing)	550.000 g
Custom tariff number	85366990
Country of origin	United States

### Technical data

#### Dimensions

Width	254 mm
	254 mm
Height	143.5 mm
	143.5 mm
Depth	23.6 mm
	23.6 mm

## Interface card - 1771-CONTACT21/D25F - 2906375

### Technical data

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

#### General

Nominal voltage U <sub>N</sub>	max. 125 V AC/DC
Max. perm. current (per branch)	2 A
Number of positions	21
Status display	No

#### Connection data

Connection name	Terminal connection
Number of positions	21
Connection name	Terminal connection
Number of positions	21

#### Supported controller

Controller	Allen-Bradley® 1771 (PLC5)
- suitable I/O card	1771-IFE
	1771-IFF
	1771-IFMS
	1771-IAD
	1771-IBD
	1771-ICD
	1771-IGD
	1771-IND
	1771-IND1
	1771-OAD
	1771-OBD
	1771-OBDS
	1771-OGD
	1771-OND


#### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


### Drawings

# Interface card - 1771-CONTACT21/D25F - 2906375

Dimensional drawing

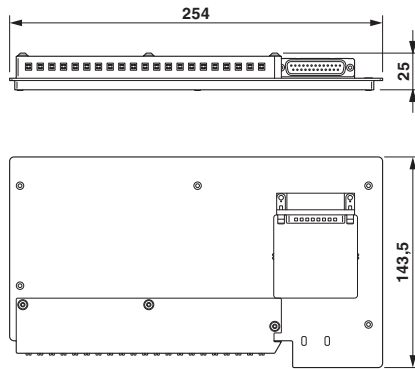

Circuit diagram

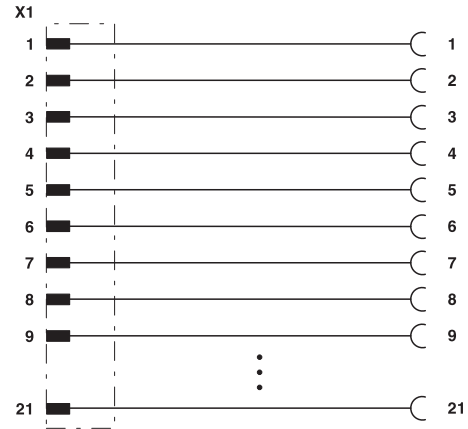

## Classifications

eCl@ss

eCl@ss 10.0.1	27141152
eCl@ss 11.0	27141152
eCl@ss 4.0	27250313
eCl@ss 4.1	27250313
eCl@ss 5.0	27250313
eCl@ss 5.1	27250313
eCl@ss 7.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 4.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

## Approvals

Approvals

Approvals


CSA / UL Recognized / cUL Recognized / CSAus / cULus Recognized / cCSAus


Ex Approvals


# Interface card - 1771-CONTACT21/D25F - 2906375


## Approvals

### Approval details

CSA		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	108860_0_000
Nominal voltage UN		125 V	
Nominal current IN		2 A	

UL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		125 V	
Nominal current IN		2 A	

cUL Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
Nominal voltage UN		125 V	
Nominal current IN		2 A	

CSAus		<a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a>	108860_0_000
Nominal voltage UN		125 V	
Nominal current IN		2 A	

cULus Recognized	
------------------	---

cCSAus	
--------	---

