

Panel feed-through terminal block - PT 4-WE/34 - 3044939

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Panel feed-through terminal block, Minimum distance to other conductive surfaces: min 5 mm, nom. voltage: 500 V, nominal current: 24 A, connection method: Push-in connection, number of connections: 68, number of positions: 34, cross section: 0.14 mm² - 4 mm², AWG: 26 - 12, width: 180.1 mm, height: 26.6 mm, color: gray, mounting type: Wall mounting

The figure shows a version of the article

Your advantages

- ✓ Easy grouping with engagement pin versions
- ✓ Highly flexible, thanks to alignable single terminal blocks
- ✓ Easy connection of the conductors, thanks to fast Push-in spring connection
- ✓ CLIPLINE complete accessories for easy bridging, testing, and marking
- ✓ Automatic compensation of the panel thickness via the snap principle integrated in the insulation housing

RoHS

Key Commercial Data

Packing unit	1
GTIN	 4 0 5 5 6 2 6 4 6 1 7 3 1
GTIN	4055626461731
Custom tariff number	85369010

Technical data

Item properties

Number of positions	34
Number of connections	68

Dimensions for the product

Length [l]	51.3 mm
Width [w]	180.1 mm

Panel feed-through terminal block - PT 4-WE/34 - 3044939

Technical data

Dimensions for the product

Height [h]	26.6 mm
Pitch	5.2 mm

Dimensions for mounting cutout

Plate thickness	1 mm ... 2.5 mm
-----------------	-----------------

Packaging information

Pieces per package	5
Denomination packing units	Pcs.

General product information

Type of note	Assembly instruction:
Note	Minimum distance to other conductive surfaces: min 5 mm

Standards and Regulations

Connection in acc. with standard	IEC 60947-7-1
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings


Circuit diagram



Dimensional drawing

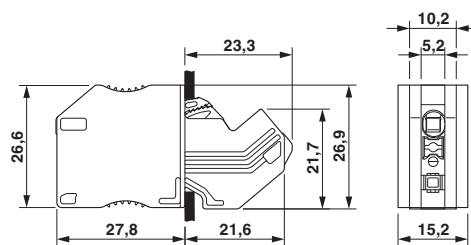


Dimensional drawing

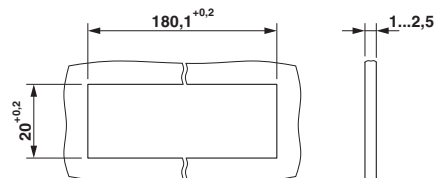

Panel feed-through terminal block - PT 4-WE/34 - 3044939

Schematic diagram

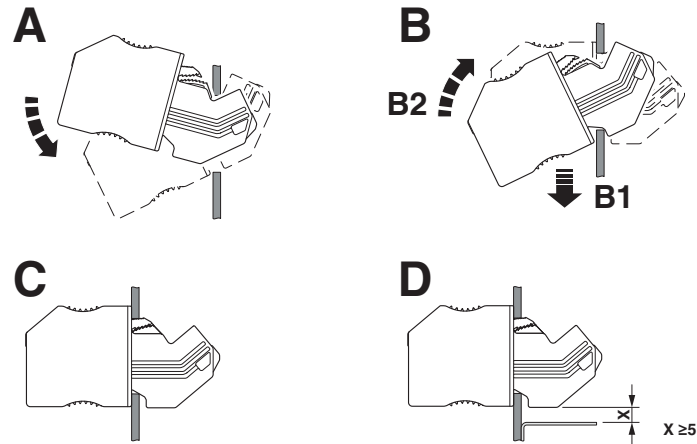

Assembly drawing

Classifications

eCl@ss

eCl@ss 10.0.1	27141120
eCl@ss 11.0	27141120
eCl@ss 4.0	27141111
eCl@ss 4.1	27141111
eCl@ss 5.0	27141100
eCl@ss 5.1	27141100
eCl@ss 6.0	27141100
eCl@ss 7.0	27141134
eCl@ss 9.0	27141120

ETIM

ETIM 3.0	EC001283
ETIM 4.0	EC001283
ETIM 6.0	EC000897
ETIM 7.0	EC000897

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410
UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410

Panel feed-through terminal block - PT 4-WE/34 - 3044939

Classifications

UNSPSC

UNSPSC 18.0	39121410
UNSPSC 19.0	39121410
UNSPSC 20.0	39121410
UNSPSC 21.0	39121410

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / EAC / EAC / cULus Recognized

Ex Approvals

Approval details

UL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 60425			
	B	C	D
Nominal voltage UN	300 V	150 V	300 V
Nominal current IN	25 A	25 A	10 A
mm²/AWG/kcmil	24-10	24-10	24-10

cUL Recognized  http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm FILE E 60425			
	B	C	D
Nominal voltage UN	300 V	150 V	300 V
Nominal current IN	25 A	25 A	10 A
mm²/AWG/kcmil	24-10	24-10	24-10

EAC  RU C- DE.AI30.B.01102			
---	--	--	--

Panel feed-through terminal block - PT 4-WE/34 - 3044939

Approvals

EAC



RU C-
DE.BL08.B.00682

cULus Recognized

