

IoT gateway - CLOUD IOT GATEWAY - 1031235

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Cloud IoT gateway for integrating new and existing systems without additional engineering costs. Thanks to simple process connection using protocols such as Modbus/TCP, sensor and process data can be collected, processed, and monitored in the Proficloud.

Your advantages

- ✓ Direct connection to the Proficloud, the open IoT platform
- ✓ Compact housing
- ✓ Easy configuration, thanks to web-based management
- ✓ Dashboard for easy visualization of sensor and processor data
- ✓ Various protocols supported, e.g. Modbus/TCP
- ✓ Robust hardware for use in the industrial environment
- ✓ Secure transmission, thanks to TLS (Transport Layer Security) encryption



Key Commercial Data

Packing unit	1 pc
GTIN	 4 055626 534169
GTIN	4055626534169
Weight per Piece (excluding packing)	200.000 g
Custom tariff number	85176200
Country of origin	Germany

Technical data

Dimensions

Width	22.5 mm
Height	99 mm
Depth	114.5 mm

IoT gateway - CLOUD IOT GATEWAY - 1031235

Technical data

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	-25 °C ... 55 °C up to 2000 m above mean sea level
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Permissible humidity (operation)	30 % ... 95 % (according to DIN EN 61131-2)
Permissible humidity (storage/transport)	5 % ... 95 %
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Air pressure (storage/transport)	58 kPa ... 106 kPa (up to 4500 m above mean sea level)
Shock	30g, 11 ms period, half-sine shock pulse, according to IEC 60068-2-27

Mechanical design

Weight	144.5 g
Note on weight specifications	with connectors

Data interfaces

Interface	RS-232
Connection method	COMBICON connectors
Interface	RS-485
Number	1
Connection method	COMBICON connectors
Interface	Ethernet
Number	2
Connection method	RJ45
Transmission speed	100 Mbps
Protocols supported	Modbus/RTU (Master)
	Modbus/RTU
	Modbus/TCP, HTTPS
Interface	Service
Number	1
Connection method	USB type C

Power supply

Typical current consumption	200 mA
Supply voltage	24 V DC -20 % / +15 %
Supply voltage range	18 V DC ... 30 V DC

General data

Processor	Arm® Cortex®-A8 1x 600 MHz
-----------	----------------------------

IEC 61131 runtime system

Realtime clock	Yes
----------------	-----

IoT gateway - CLOUD IOT GATEWAY - 1031235

Technical data

Standards and Regulations

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
Interference emission	Noise emission test according to EN 61000-6-3 Class B
Immunity to surge	Noise immunity test in accordance with EN 61000-6-2 Transient overvoltage (surge) EN 61000-4-5/IEC 61000-4-5 Criterion B, DC supply lines: ± 0.5 kV/ ± 0.5 kV (symmetrical/asymmetrical), fieldbus cable shield: ± 1 kV
Immunity to burst	Noise immunity test in accordance with EN 61000-6-2 Fast transients (burst) EN 61000-4-4/IEC 61000-4-4 Criterion B, 2 kV
Immunity to EF	Noise immunity test in accordance with EN 61000-6-2 Electromagnetic fields EN 61000-4-3/IEC 61000-4-3 Criterion A, Field intensity: 10 V/m
Immunity to ESD	Noise immunity test in accordance with EN 61000-6-2 Electrostatic discharge (ESD) EN 61000-4-2/IEC 61000-4-2 Criterion B, 6 kV contact discharge, 8 kV air discharge
Immunity to conducted interference	Noise immunity test in accordance with EN 61000-6-2 Conducted interference EN 61000-4-6/IEC 61000-4-6 Criterion A, Test voltage 10 V
Shock	30g, 11 ms period, half-sine shock pulse, according to IEC 60068-2-27
Shock (operation)	10g (Bump endurance test according to DIN EN 60068-2-27)

IoT capability


Supports cloud computing	yes
IoT platform	PROFICLOUD

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

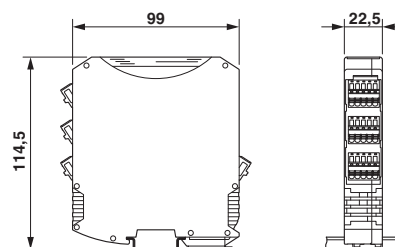

Classifications

eCl@ss

eCl@ss 10.0.1	27242608
eCl@ss 11.0	27242608

IoT gateway - CLOUD IOT GATEWAY - 1031235

Classifications

eCl@ss

eCl@ss 5.1	27242608
eCl@ss 6.0	27242600
eCl@ss 7.0	27242608
eCl@ss 9.0	27242608

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 6.0	EC001604
ETIM 7.0	EC001604

Approvals

Approvals

Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
-----------	--	---	---------------

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
------------	--	---	---------------

cULus Listed			
--------------	--	--	--