

# Router - TC MGUARD RS4000 4G VZW VPN - 1010461

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Security appliance, version for Verizon Wireless (US), WAN and 4G mobile network interface, SD card slot, 10 VPN tunnels, intelligent firewall with full scope of functions, router with NAT/1:1 NAT, optional CIFS Integrity Monitoring, 4 port Managed Switch

## Product Description

The TC MGUARD... security appliances are industrial mobile network routers with mGuard technology. As such, the routers offer a remote maintenance infrastructure for the secure connection of machines and systems via the Internet.

A high-speed mobile network interface and a 4-port switch are integrated into a compact metal housing. Secure remote communication on a global scale takes place via 4G LTE as well as UMTS and CDMA networks.

With the help of an SD card as a configuration memory, the devices can be quickly and easily started up or replaced. The devices have a buffered realtime clock and Trusted Platform Module (TPM) for secure key generation and management.

## Your advantages

- ✓ Integrated 4-port switch
- ✓ Maximum security with IPsec protocol on Layer 3
- ✓ Web-based management
- ✓ Replaceable configuration memory
- ✓ RS-232 interface with COM server function for integrating serial devices
- ✓ Flexible routing
- ✓ Up to 10 parallel VPN tunnels (up to 250 possible with additional license as an option)
- ✓ Supports current certificates such as x509.v3
- ✓ Stateful inspection firewall for dynamic filtering
- ✓ Extended temperature rating



## Key Commercial Data

Packing unit	1 pc
GTIN	
GTIN	4055626484143
Weight per Piece (excluding packing)	640.000 g

## Router - TC MGUARD RS4000 4G VZW VPN - 1010461

Custom tariff number	85176200
Country of origin	Germany

### Technical data

#### Note

Utilization restriction	Use in potentially explosive areas is not permitted in China.
-------------------------	---------------------------------------------------------------

#### Dimensions

Width	45 mm
Height	130 mm
Depth	114 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 60 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C
Permissible humidity (operation)	5 % ... 95 % (non-condensing)
Altitude	≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation)
Degree of protection	IP20 (Manufacturer's declaration)

#### General

Electrical isolation	VCC // PE
Test voltage data interface/data interface	1 kV (50 Hz, 1 min., manufacturer's declaration)
Test voltage data interface/power supply	1 kV (50 Hz, 1 min., manufacturer's declaration)
Electromagnetic compatibility	Conformance with RED Directive 2014/53/EU
Mounting type	DIN rail mounting
Net weight	630.1 g
Housing material	Metal
Color	silver
MTTF	532 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	250 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	104 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)
Degree of pollution	2
Wireless licences	USA

#### Power supply

Supply voltage range	11 V DC ... 36 V DC (via pluggable COMBICON screw terminal block)
Max. current consumption	1.8 A (at 11 V DC (incl. 3 x 125 mA for the outputs))
Typical current consumption	< 320 mA (24 V DC)
Conductor cross section flexible, with ferrule without plastic sleeve	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, flexible, with ferrule, with plastic sleeve	0.25 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>

# Router - TC MGUARD RS4000 4G VZW VPN - 1010461

## Technical data

### Power supply

Conductor cross section flexible max.	2.50 mm <sup>2</sup>
Conductor cross section flexible min.	0.20 mm <sup>2</sup>
Conductor cross section solid max.	2.50 mm <sup>2</sup>
Conductor cross section solid min.	0.20 mm <sup>2</sup>
Conductor cross section AWG max.	14
Conductor cross section AWG min.	24
Stripping length	7 mm

### Interfaces

Interface 1	Ethernet interface, 10/100Base-T(X) in accordance with IEEE 802.3
Interface	Ethernet
No. of ports	6
Connection method	RJ45
Transmission length	100 m (shielded twisted pair)
Protocols supported	TCP/IP, UDP/IP, FTP, HTTP
Auxiliary protocols	ARP, DHCP, PING (ICMP), SNMP V1, SMTP
Basic functions	Router with intelligent firewall and VPN for 10 tunnels (up to 250 supported with optional additional license), CIFS Integrity Monitoring (as an option), metal housing, slot for SD memory card
Transmission speed	10/100 Mbps (auto negotiation)
Interface 2	V.24 (RS-232) interface in acc. with ITU-T V.28, EIA/TIA-232, DIN 66259-1
Interface	RS-232
Connection method	D-SUB 9 plug
File format/coding	UART/NRZ: 8 Data, 1/2 Stop, None/Even/Odd Parity
Transmission length	15 m
Data flow control/protocols	Software handshake, Xon/Xoff or hardware handshake RTS/CTS
Serial transmission speed	9.6; 19.2; 38.4; 57.6; 115.2 kbps

### Wireless interface

Interface description	LTE (FDD)
Frequency range	700 MHz (LTE B13) 1700 MHz (LTE B4)
Data rate	≤ 150 Mbps (LTE (DL)) ≤ 50 Mbps (LTE (UL))
Antenna	50 Ω impedance SMA antenna socket
SIM interface 1	1.8 volt, 3 volt
LTE	CAT4
Country support	USA

### Function

# Router - TC MGUARD RS4000 4G VZW VPN - 1010461

## Technical data

### Function

Web-based management	yes
Management	Web-based management, SNMP
Number of VPN tunnels	10 (up to 250 tunnels with additional license as an option)
Security functions	Supported Supported Supported DES, 3DES, AES-128, -192, -256 ESP tunnel / ESP transport Supported Supported X.509v3 certificates with RSA or PSK MD5, SHA-1 Quick mode, Main mode, PFS RFC 3706 MAC and IP addresses, ports, protocols IP spoofing, DoS and Syn Flood Protection Standard routing, NAT, 1:1-NAT, port forwarding

### Digital outputs

Output name	Digital output, resistive load
Number of outputs	3
Voltage output signal	10 V DC ... 30 V DC (depending on the operating voltage)
Current output signal	≤ 125 mA (Short-circuit-proof)

### Digital inputs

Description of the input	Digital input
Number of inputs	3
Voltage input signal	10 V DC ... 30 V DC
Current input signal	5 mA

### Conformance/approvals

Designation	UL, USA/Canada
Identification	Class I, Zone 2, AEx nA IIC T4 / Ex nA IIC T4 Gc
	Class I, Div. 2, Groups A, B, C, D T4
Designation	Corrosive gas test
Identification	ISA-S71.04-1985 G3 Harsh Group A

### Standards and Regulations

Electromagnetic compatibility	Conformance with RED Directive 2014/53/EU
Type of test	Free fall in acc. with IEC 60068-2-32
Test result	1 m
Type of test	Vibration resistance in acc. with EN 60068-2-6/IEC 60068-2-6
Test result	5g, 10...150 Hz, 2.5 h, in XYZ direction
Type of test	Shock in acc. with EN 60068-2-27/IEC 60068-2-27
Test result	Operation: 15g, 11 ms period, half-sine shock pulse
Type of test	Shock in acc. with EN 60068-2-27/IEC 60068-2-27
Test result	Storage: 30g, 11 ms period, half-sine shock pulse
Free from substances that could impair the application of coating	according to P-VW 3.10.7 57 65 0 VW-AUDI-Seat central standard
Standards/regulations	EN 61000-4-2
Contact discharge	± 6 kV (Test Level 3)

# Router - TC MGUARD RS4000 4G VZW VPN - 1010461

## Technical data

### Standards and Regulations


Standards/regulations	EN 61000-4-3
Frequency range	80 MHz ... 3 GHz (Test Level 3)
Standards/regulations	EN 61000-4-4
Comments	Criterion B
Standards/regulations	EN 61000-4-5
Signal	± 1 kV (Data line, asymmetrical)
Standards/regulations	EN 61000-6-4
	EN 61000-4-6
Frequency range	0.15 MHz ... 80 MHz

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


## Drawings

Schematic diagram

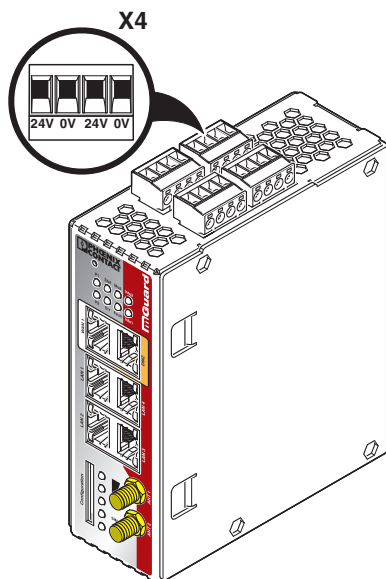

Connecting the supply voltage


Schematic diagram

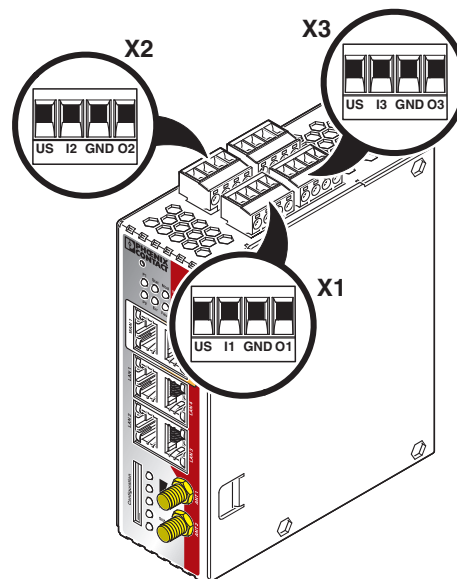

Service and signal contacts


# Router - TC MGUARD RS4000 4G VZW VPN - 1010461

Schematic diagram

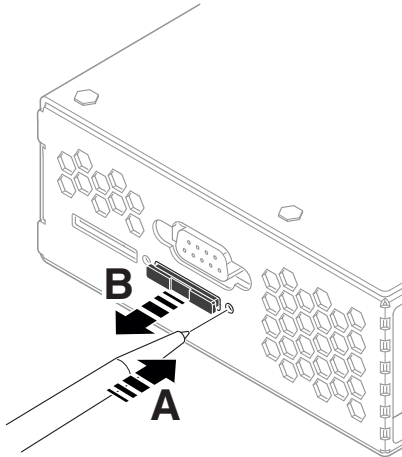


Remove SIM card holder

Schematic diagram

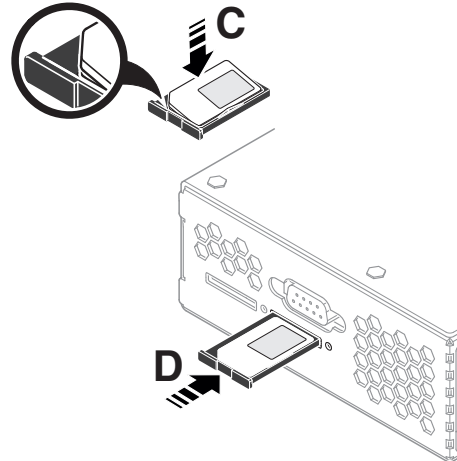


Insert the SIM card

Schematic diagram

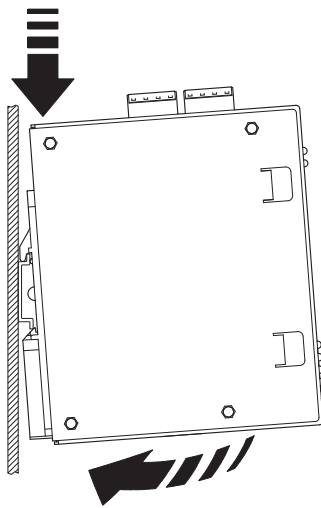

Mounting

Schematic diagram

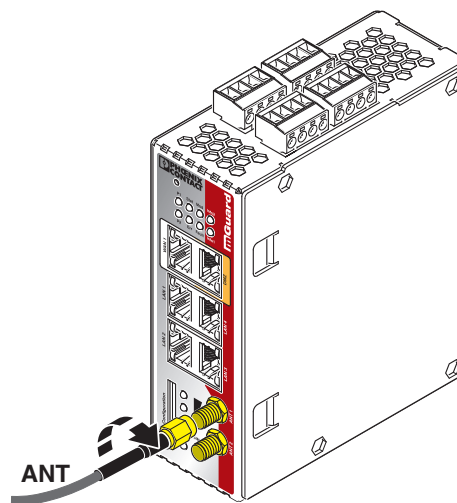

Connect the antenna

## Classifications

eCl@ss

eCl@ss 10.0.1	19170406
eCl@ss 11.0	19170406
eCl@ss 5.0	19030100

# Router - TC MGuard RS4000 4G VZW VPN - 1010461

## Classifications

### eCl@ss

eCl@ss 5.1	19030100
eCl@ss 6.0	19170100
eCl@ss 7.0	19170103
eCl@ss 9.0	19170103

### ETIM

ETIM 6.0	EC001478
ETIM 7.0	EC001478

## Approvals

### Approvals


#### Approvals


UL Listed / cUL Listed / UL Listed / cUL Listed


#### Ex Approvals

UL Listed / cUL Listed / UL Listed / cUL Listed

### Approval details

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
-----------	-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
------------	-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

UL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
-----------	-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

cUL Listed		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	FILE E 238705
------------	-------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

