

## PCB connector - FRONT-FMC 1,5/D28-FF-6,35-R BD - 1097918

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PCB connector, nominal cross section: 1.5 mm², color: light gray, nominal current: 6 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, Number of rows: 2, Number of positions per row: 28, product range: FRONT-FMC 1,5/...FF, pitch: 6.35 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, pin layout: Linear pinning, Locking clip: - without locking clip, plug-in system: IEC 60603 Connectors - Type D, Locking: Screw locking, type of packaging: packed in cardboard


The figure shows a 28-pos. version of the product

### Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Operation and conductor connection from one direction enable integration into front of device
- ✓ Screwable flange for superior mechanical stability



### Key Commercial Data

Packing unit	1
GTIN	 4 0 5 5 6 2 6 9 4 0 3 2 8
GTIN	4055626940328
Custom tariff number	85366990

### Technical data

#### Dimensions

Length [ l ]	17.27 mm
Width [ w ]	117.23 mm
Height [ h ]	26 mm
Pitch	6.35 mm
Dimension a	82.55 mm

# PCB connector - FRONT-FMC 1,5/D28-FF-6,35-R BD - 1097918


## Technical data

### General

Range of articles	FRONT-FMC 1,5/...-FF
Number of positions	28
Nominal cross section	1.5 mm <sup>2</sup>

## Drawings

Diagram

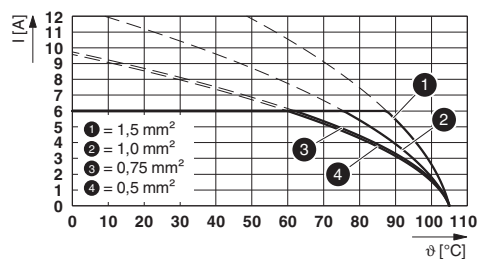

Type: FRONT-FMC 1,5/D...-FF-6,35-R with FRONT-FMC 1,5/D...-MF-6,35

## Classifications

### eCl@ss

eCl@ss 10.0.1	27440309
eCl@ss 11.0	27460202
eCl@ss 9.0	27440309

### ETIM

ETIM 6.0	EC002638
ETIM 7.0	EC002638