


# PCB connector - TVFKC 1,5/ 2-ST RDB GY35BD:-FO - 1178048

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




The figure shows a 10-position version of the product


PCB connector, nominal cross section: 1.5 mm<sup>2</sup>, color: light gray, nominal current: 10 A, rated voltage (III/2): 320 V, contact surface: Tin, type of contact: Female connector, Number of rows: 1, Number of positions per row: 2, product range: TVFKC 1,5/..-ST, pitch: 5 mm, connection method: Push-in spring connection, conductor/PCB connection direction: 0 °, Locking clip: RDB Locking clip in doubled width, plug-in system: CLASSIC COMBICON, Locking: without, type of packaging: packed in cardboard

## Your advantages

- ✓ Time saving push-in connection, tools not required
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Intuitive use through colour coded actuation lever
- ✓ Can be combined with the MSTB 2,5 range

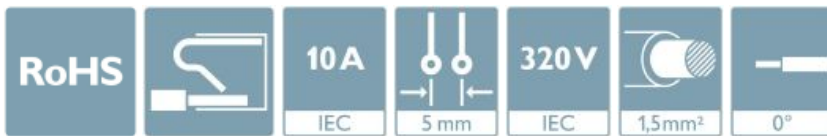

## Key Commercial Data

Packing unit	1
GTIN	 4 063151 212131
GTIN	4063151212131
Custom tariff number	85366990

## Technical data

Product type	PCB plug
Approval	EAC
	cULus Recognized
Rated voltage (IEC)	320
Rated current (IEC)	10
Number of positions	2
Pitch	5 mm


# PCB connector - TVFKC 1,5/ 2-ST RDB GY35BD:-FO - 1178048

## Technical data

Connection cross section	1.5
Type of locking	without
Connection method	Push-in spring connection
Conductor connection direction	0 °
Plug-in system	CLASSIC COMBICON
Product family	TVFKC 1,5/..-ST
Contact type	Female connector
Color	light gray (7035)
Contact surface material	Tin
Standard	IEC 61984

## Drawings

Diagram

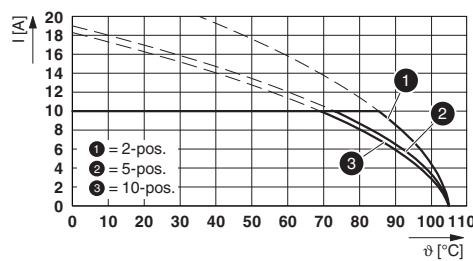

Type: TVFKC 1,5/...-ST RDB ... with MSTB 2,5/...-G

## Classifications

eCl@ss

eCl@ss 10.0.1	27440309
eCl@ss 11.0	27460202
eCl@ss 9.0	27440309

## Approvals

Approvals

Approvals

EAC / cULus Recognized

# PCB connector - TVFKC 1,5/ 2-ST RDB GY35BD:-FO - 1178048


## Approvals

Ex Approvals

---

### Approval details

EAC		B.01687
-----	---	---------

cULus Recognized		<a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a>	E60425-19931012
	B	D	
Nominal voltage UN	300 V	300 V	
Nominal current IN	8 A	8 A	
mm <sup>2</sup> /AWG/kcmil	24-16	24-16	