

Power cable - SAC-5P-M12MSL/35,0-290/FSL FE - 1276485

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Power cable, 5-position, PUR halogen-free, gray RAL 7001, cable length: 35 m, For direct current up to 12 A/63 V

Your advantages

- ✓ Easy and safe: 100% electrically tested plug-in components
- ✓ High-performance: DC connectors for up to 12 A and 63 V DC
- ✓ Protection against mismatching, thanks to special L-coding
- ✓ Our standard: robust halogen-free PUR cable

Key Commercial Data

Packing unit	1
GTIN	 4 063151 469955
GTIN	4063151469955
Custom tariff number	85444290

Technical data

Dimensions

Length of cable	35 m
-----------------	------

Ambient conditions

Degree of protection	IP65
	IP67

General

Rated current at 40°C	12 A
Rated voltage	63 V DC
Number of positions	5
Standards/regulations	M12 connector IEC 61076-2-111
Status display	No
Protective circuit/component	unwired

Power cable - SAC-5P-M12MSL/35,0-290/FSL FE - 1276485

Technical data

General

Overvoltage category	III
Degree of pollution	3
Torque	0.4 Nm

Material

Flammability rating according to UL 94	V0
--	----

Standards and Regulations

Standards/specifications	M12 connector IEC 61076-2-111
Flammability rating according to UL 94	V0

Cable

Cable type	PUR halogen-free gray
Cable type (abbreviation)	290
UL AWM style	20233 / 10493 (80°C/300 V)
Conductor cross section	5x 1.5 mm ²
AWG power supply	16
Conductor structure, voltage supply	78x 0.15 mm
Core diameter including insulation	2.35 mm ±0.05 mm
Thickness, insulation	≥ 0.25 mm
Wire colors	brown, white, blue, black, pink
External sheath, color	gray RAL 7001
Outer sheath thickness	approx. 1.3 mm
External cable diameter D	9.1 mm ±0.25 mm
Minimum bending radius, fixed installation	5 x D
Minimum bending radius, flexible installation	10 x D
Number of bending cycles	4000000
Minimum bending radius, drag chain applications	10 x D
Traversing path	10 m
Traversing rate	3 m/s
Acceleration	10 m/s ²
Outer sheath, material	PUR
Material conductor insulation	PP
Conductor material	Bare Cu litz wires
Insulation resistance	≥ 1 GΩ*km (at 20 °C)
Conductor resistance	≤ 13 Ω/km (at 20 °C)
Nominal voltage, cable	≤ 300 V AC
Test voltage, cable	≥ 3000 V AC (Spark test)
Other resistance	Hydrolysis and microbe resistant as per VDE 0282 section 10

Power cable - SAC-5P-M12MSL/35,0-290/FSL FE - 1276485


Technical data

Cable

	Low adhesion
	abrasion-resistant
	Resistant to salt water
Flame resistance	According to UL 758/1581 (Cable Flame)
	according to UL 758/1581 FT1
	According to DIN EN 60332-1-2
Halogen-free	in accordance with DIN VDE 0472 part 815
	in accordance with DIN EN 50267-2-1
Resistance to oil	according to DIN EN 60811-404, 168 h at 100 °C
Ambient temperature (operation)	-50 °C ... 80 °C (cable, fixed installation)
	-30 °C ... 80 °C (cable, flexible installation)


Drawings

Schematic diagram




Pin assignment of M12 connector, 5-pos., L-coded, pin side view

Schematic diagram




Pin assignment of M12 socket, 5-pos., L-coded, socket side view

Diagram

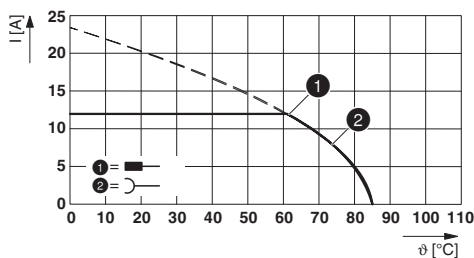

Current carrying capacity


Dimensional drawing

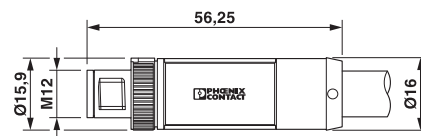

Plug, M12 x 1, straight, shielded

Power cable - SAC-5P-M12MSL/35,0-290/FSL FE - 1276485

Dimensional drawing

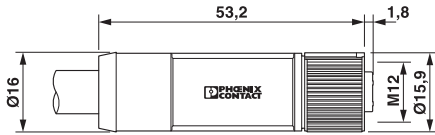


M12 x 1 socket, straight

Circuit diagram



Contact assignment of M12 connector/socket

Cable cross section

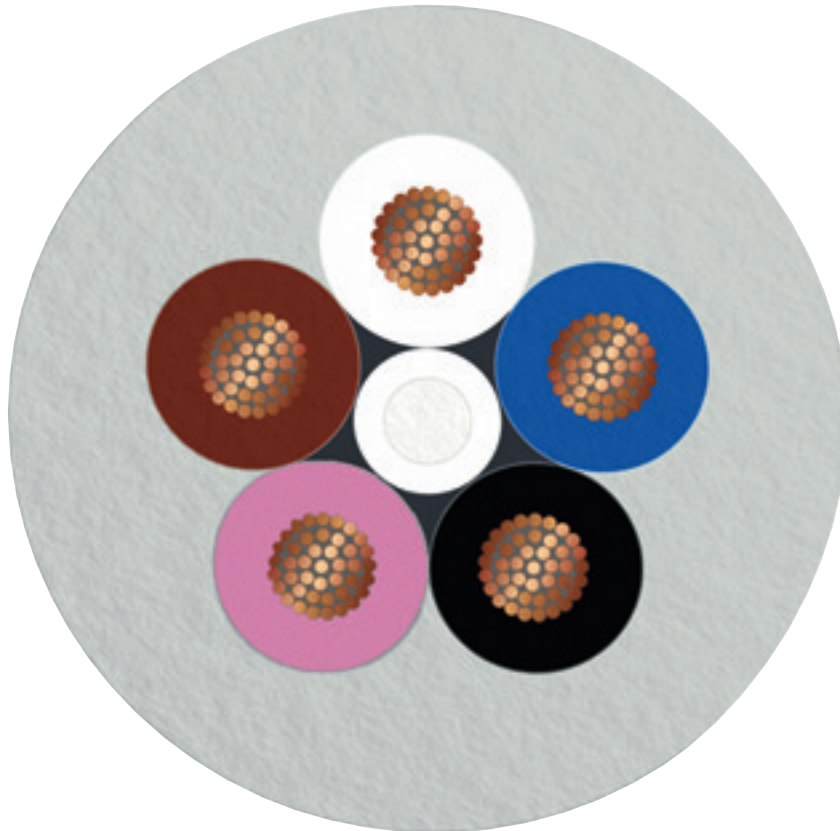

PUR halogen-free gray [290]

Power cable - SAC-5P-M12MSL/35,0-290/FSL FE - 1276485

Classifications

eCl@ss

eCl@ss 10.0.1	27060311
eCl@ss 11.0	27060311
eCl@ss 9.0	27060311

Approvals


Approvals


Approvals

UL Listed / cUL Listed / cULus Listed

Ex Approvals

Approval details

UL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E468743
Nominal voltage UN	63 V		
Nominal current IN	16 A		
mm ² /AWG/kcmil	14		

cUL Listed		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E468743
Nominal voltage UN	63 V		
Nominal current IN	16 A		
mm ² /AWG/kcmil	14		

cULus Listed			
--------------	---	--	--

