

RC-12S2N12Z100 - Cable connector



1599996

<https://www.phoenixcontact.com/pc/products/1599996>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: RC, angled, shielded: no, Screw locking mechanism, No. of pos.: 12, Direction of rotation: Counter direction, contact connection type: Socket, Solder cup, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241154

Commercial data

Item number	1599996
Packing unit	8 pc
Minimum order quantity	1 pc
Note	Made to order (non-returnable)
Product key	ABRAFC
GTIN	4046356228121
Weight per piece (including packing)	146.9 g
Weight per piece (excluding packing)	139.97 g
Customs tariff number	85366990
Country of origin	DE

RC-12S2N12Z100 - Cable connector



1599996

<https://www.phoenixcontact.com/pc/products/1599996>

Technical data

Product properties

Product type	Circular connector (cable-side)
Thread type	M23

Material specifications

Flammability rating according to UL 94	V0
--	----

Connection data

Conductor connection

Connection method	Solder connection
-------------------	-------------------

Connector

Insulating body

Coding	N
Insertion/withdrawal cycles	50
Connection method	Solder cup
Contact switching type	Socket
Application	Signal
Number of positions	12
Direction of rotation	Counter direction
Connection profile	12
Contact diameter	1 mm
Power contacts	
Litz wire cross-section Power contacts min.	0.08 mm ²
Litz wire cross-section Power contacts max.	1 mm ²
Rated current Power contacts	8 A
Rated voltage	48 V AC
	74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

Housing

Housing material	Metal
Type of locking	Screw locking mechanism
Pg screw connection	Pg9
Degree of protection (plugged in)	IP65
	IP67
Thread type	M23

Environmental and real-life conditions

RC-12S2N12Z100 - Cable connector



1599996

<https://www.phoenixcontact.com/pc/products/1599996>

Ambient conditions

Degree of protection	IP67
----------------------	------


RC-12S2N12Z100 - Cable connector

1599996

<https://www.phoenixcontact.com/pc/products/1599996>

Drawings

Schematic diagram

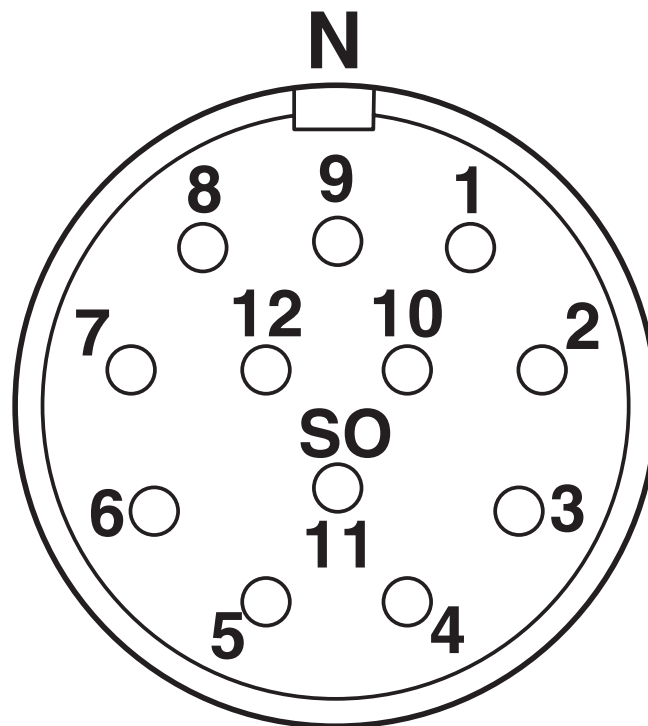

Connector pin assignment

RC-12S2N12Z100 - Cable connector



1599996

<https://www.phoenixcontact.com/pc/products/1599996>

Classifications

ECLASS

ECLASS-11.0	27440109
ECLASS-12.0	27440109
ECLASS-13.0	27440109

ETIM

ETIM 8.0	EC003569
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

RC-12S2N12Z100 - Cable connector



1599996

<https://www.phoenixcontact.com/pc/products/1599996>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	c3d4b4d8-378e-49e7-8343-c0bae111b4bc

RC-12S2N12Z100 - Cable connector



1599996

<https://www.phoenixcontact.com/pc/products/1599996>

Accessories

PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/pc/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstraße 8
D-32825 Blomberg
+49 (0) 5235-3 00
info@phoenixcontact.com