

1400763

<https://www.phoenixcontact.com/pc/products/1400763>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Sensor/actuator cable, 4-position, PUR halogen-free, black-gray RAL 7021, free cable end, on Valve connector AD (pressure switch), Wiring: unwired, cable length: 3 m, Pin connector pattern of valve plug rotated 180°

Commercial data

Item number	1400763
Packing unit	1 pc
Minimum order quantity	100 pc
Product key	BF1DBA
GTIN	4046356513739
Weight per piece (including packing)	133.2 g
Weight per piece (excluding packing)	130.2 g
Customs tariff number	85444290
Country of origin	PL

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

Technical data

Product properties

Product type	Sensor/actuator cable with valve connector
Number of positions	4
No. of cable outlets	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Material specifications

Flammability rating according to UL 94	V0
Material housing valve plug	TPU
Contact material	CuSn
Valve plug contact insert material	PA 6
Contact surface material	Sn

Electrical properties

Insulation resistance	$\geq 100 \text{ M}\Omega$
Nominal voltage U_N	230 V AC
	230 V DC
Nominal current I_N	4 A

Signaling

Status display	No
Status display present	No

Connector

Connection 1

Type	free cable end
------	----------------

Connection 2

Type	Valve connector AD (pressure switch)
Material	CuSn (Contact)
	Sn (Contact surface)
	PA 6 (Contact carriers)
	TPU (Housing)

Cable/line

Cable length	3 m
--------------	-----


PUR halogen-free black [PUR]

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

Dimensional drawing	
UL AWM Style	20549
Number of positions	4
Shielded	no
Cable type	PUR halogen-free black [PUR]
Conductor structure signal line	28x 0.15 mm
AWG signal line	20
Conductor cross section	4x 0.5 mm²
Wire diameter incl. insulation	1.5 mm ±0.05 mm (Signal line)
External cable diameter	4.90 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black-gray RAL 7021
Conductor material	Bare Cu litz wires
Material wire insulation	PP
Single wire, color	black 1, black 2, black 3, green/yellow
Overall twist	4 wires, twisted
Max. conductor resistance	39 Ω/km (at 20 °C)
Insulation resistance	min. 20 MΩ*km
Nominal voltage, cable	300 V
Test voltage	1200 V
Smallest bending radius, fixed installation	25 mm
Smallest bending radius, movable installation	50 mm
Max. bending cycles	15000000
Flame resistance	according to DIN VDE 0482 According to DIN EN 50265-2-1
Other resistance	largely oil-resistant partly UV-resistant (in accordance with DIN EN ISO 4892-2-A)
Ambient temperature (operation)	-40 °C ... 80 °C (cable, fixed installation) -20 °C ... 80 °C (Cable, flexible installation)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65 IP67
Ambient temperature (operation)	-20 °C ... 85 °C (valve plug)

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

Standards and regulations

Valve connector

Standard designation	Valve connector
Standards/specifications	EN 175301-803


SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable




1400763

<https://www.phoenixcontact.com/pc/products/1400763>


Drawings

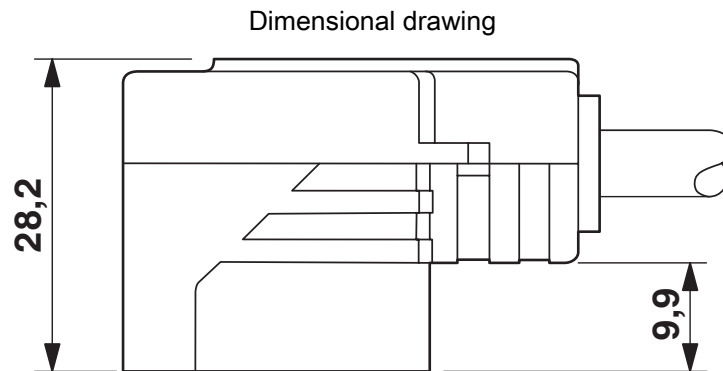

Valve connector, type AD, side view

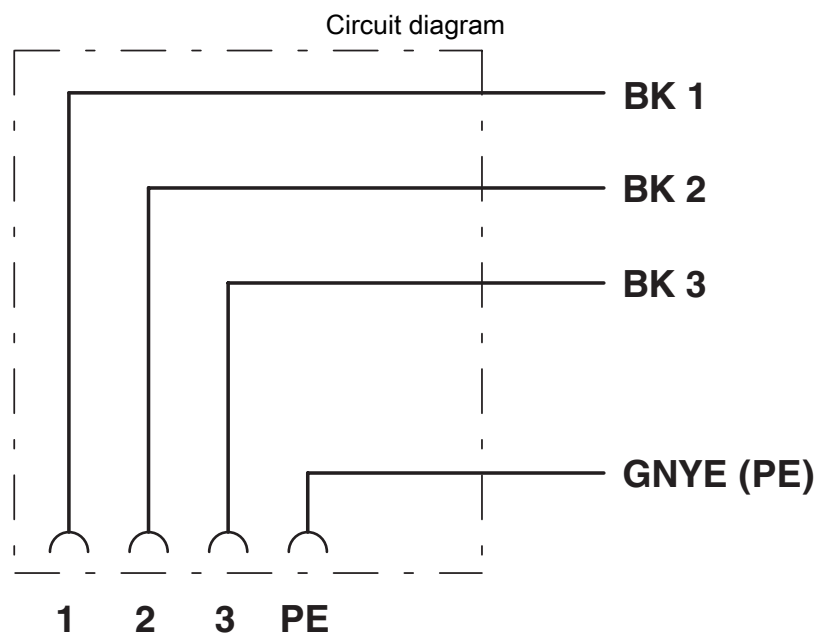


Dimensional drawing

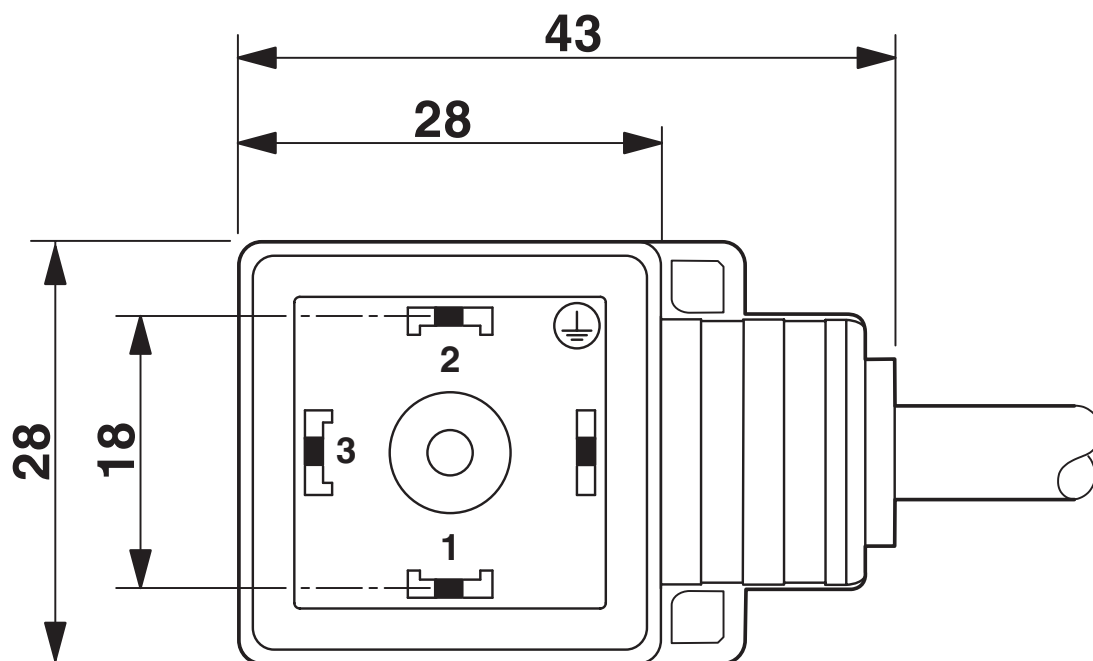

Valve connector, type AD, 180° rotated

Schematic diagram

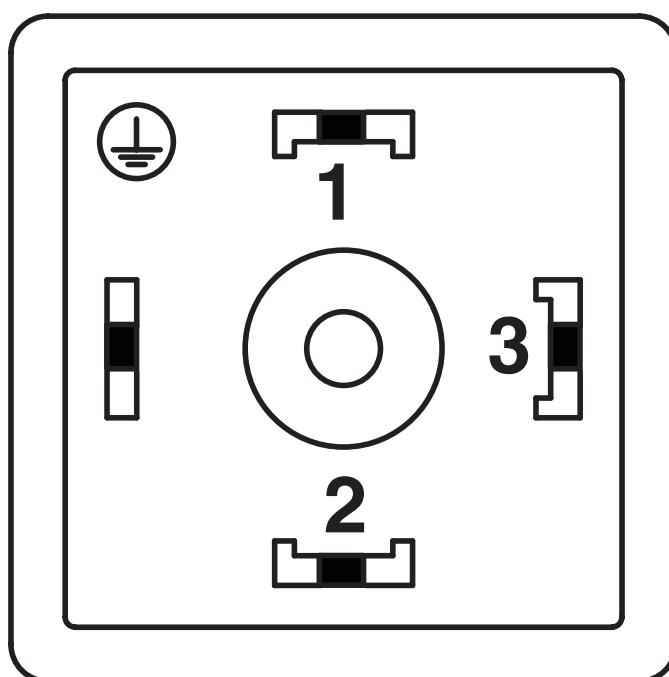

Valve plug connector pin assignment, type AD

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

Classifications

ECLASS

ECLASS-11.0	27060312
ECLASS-12.0	27060312
ECLASS-13.0	27060312

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

Accessories

SAC-V-SCREW-M3-29 KNURL - Screw

1403779

<https://www.phoenixcontact.com/pc/products/1403779>

Fillister head screw with plastic knurl, M3 x 40



UCT-WMT (23X4) - Conductor marker

0801453

<https://www.phoenixcontact.com/pc/products/0801453>

Conductor marker, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 30



SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

UC-WMT (23X4) - Conductor marker

0819411

<https://www.phoenixcontact.com/pc/products/0819411>



Conductor marker, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 24

US-WMT (23X4) - Cable marker

0828769

<https://www.phoenixcontact.com/pc/products/0828769>



Cable marker, Card, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: slide-on, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 56

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable

1400763

<https://www.phoenixcontact.com/pc/products/1400763>



WMTW (23X4)R - Cable marker

0831004

<https://www.phoenixcontact.com/pc/products/0831004>



Cable marker, Roll, white, unlabeled, can be labeled with: THERMOMARK E.300 (D)/600 (D), THERMOMARK ROLL 2.0, THERMOMARK ROLL, THERMOMARK ROLL X1, THERMOMARK ROLLMASTER 300/600, THERMOMARK X1.2, mounting type: insert, cable diameter range: 1.5 ... 35 mm, lettering field size: 23 x 4 mm, Number of individual labels: 3000

WP-CTA POM 13,0 BK - Protective hose adapter

1422884

<https://www.phoenixcontact.com/pc/products/1422884>



Protective hose adapter, for corrugated hoses with a nominal size of 13 (10 x 13), corrugated in parallel

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable

1400763

<https://www.phoenixcontact.com/pc/products/1400763>



WP-PA HF 13,0 BK - Protective hose

3240681

<https://www.phoenixcontact.com/pc/products/3240681>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: V0, inner diameter: 10 mm, Total length: 50 m

WP-PA HF-HB 13,0 BK - Protective hose

3240839

<https://www.phoenixcontact.com/pc/products/3240839>



Protective hose, material: PA 6, UV-resistant: yes, flexible, degree of protection: IP68, color: black, flammability rating in acc. with UL 94: HB, inner diameter: 10 mm, Total length: 50 m

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

TSD-M 1,2NM - Torque screwdriver

1212224

<https://www.phoenixcontact.com/pc/products/1212224>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 0.3 - 1.2 Nm

SF-BIT-PH 1-70 - Screw insert

1212582

<https://www.phoenixcontact.com/pc/products/1212582>



Screw bit, PH crosshead, E6.3-1/4" drive, size: PH 1 x 70 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable

1400763

<https://www.phoenixcontact.com/pc/products/1400763>



B-STIFT - Marker pen

1051993

<https://www.phoenixcontact.com/pc/products/1051993>



Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm

CUTFOX-S VDE - Diagonal cutter

1212207

<https://www.phoenixcontact.com/pc/products/1212207>



Diagonal cutter for hard (piano wire) and soft wires, VDE 1000 V AC/1500 V DC tested

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

WIREFOX SAC-1 - Stripping tool

1212757

<https://www.phoenixcontact.com/pc/products/1212757>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 3.2 to 4.4 mm, any stripping length

WIREFOX SAC - Stripping tool

1212623

<https://www.phoenixcontact.com/pc/products/1212623>



Stripping pliers, for halogen-free sensor/actuator cables (SAC cables), with PUR and PVC insulation, from Ø of 4.4 to 7 mm, any stripping length

SAC-4P-3,0-PUR/AD 180 - Sensor/actuator cable



1400763

<https://www.phoenixcontact.com/pc/products/1400763>

WIREFOX 10 - Stripping tool

1212150

<https://www.phoenixcontact.com/pc/products/1212150>



Stripping tool, for cables and conductors from 0.02 - 10 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com