

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat



0810863

<https://www.phoenixcontact.com/pc/products/0810863>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Zack Marker strip, flat, Strip, white, labeled, printed horizontally: Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

Your advantages

- Labeling service: Phoenix Contact can custom-label all zack marker strip markers according to your requirements
- Unlabeled marking strips can be custom-labeled with a plotter or by hand
- Other pitches available on request
- The ZBF zack marker strip system with flat marker groove is a marking solution for modular terminal blocks and electronics modules
- The multi-section marking strips are easy to fit and can be easily separated if required

Commercial data

Item number	0810863
Packing unit	10 pc
Minimum order quantity	10 pc
Product key	BG2122
Catalog page	Page 127 (C-3-2019)
Weight per piece (including packing)	400 MGM
Weight per piece (excluding packing)	310 MGM
Customs tariff number	49119900
Country of origin	DE

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat



0810863

<https://www.phoenixcontact.com/pc/products/0810863>

Technical data

Product properties

Product type	Labeled terminal marker
Pitch	5 mm
Type	flat

Marking

Number of individual labels	10
Number of individual labels per row	10
Number of marker strips	10
Printing direction	printed horizontally
Printing	Odd numbers 1 - 19, 21 - 39, etc. up to 81 - 99

Mounting

Mounting type	snapped
---------------	---------

Material specifications

Color	white
Material	PA
Flammability rating according to UL 94	V2
Base element material	PA
Components	free from silicone and halogen

Environmental and real-life conditions

UV resistance

Specification	ISO 4892-2:2013-03 (following)
---------------	--------------------------------

Wipe resistance of inscriptions

Specification	DIN EN 61010-1 (VDE 0411-1):2011-07
	DIN EN 62208 (VDE 0660-511):2012-06 (in parts)

Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
Recommended ambient temperature (storage/transport)	23 °C
Recommended humidity (storage/transport)	50 %

Dimensions

Width	5 mm
Pitch	5 mm

Standards and regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------

Notes

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat



0810863

<https://www.phoenixcontact.com/pc/products/0810863>

General

10 identically marked strips make up one packing unit (PU).


ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat

0810863

<https://www.phoenixcontact.com/pc/products/0810863>

Drawings

Schematic diagram

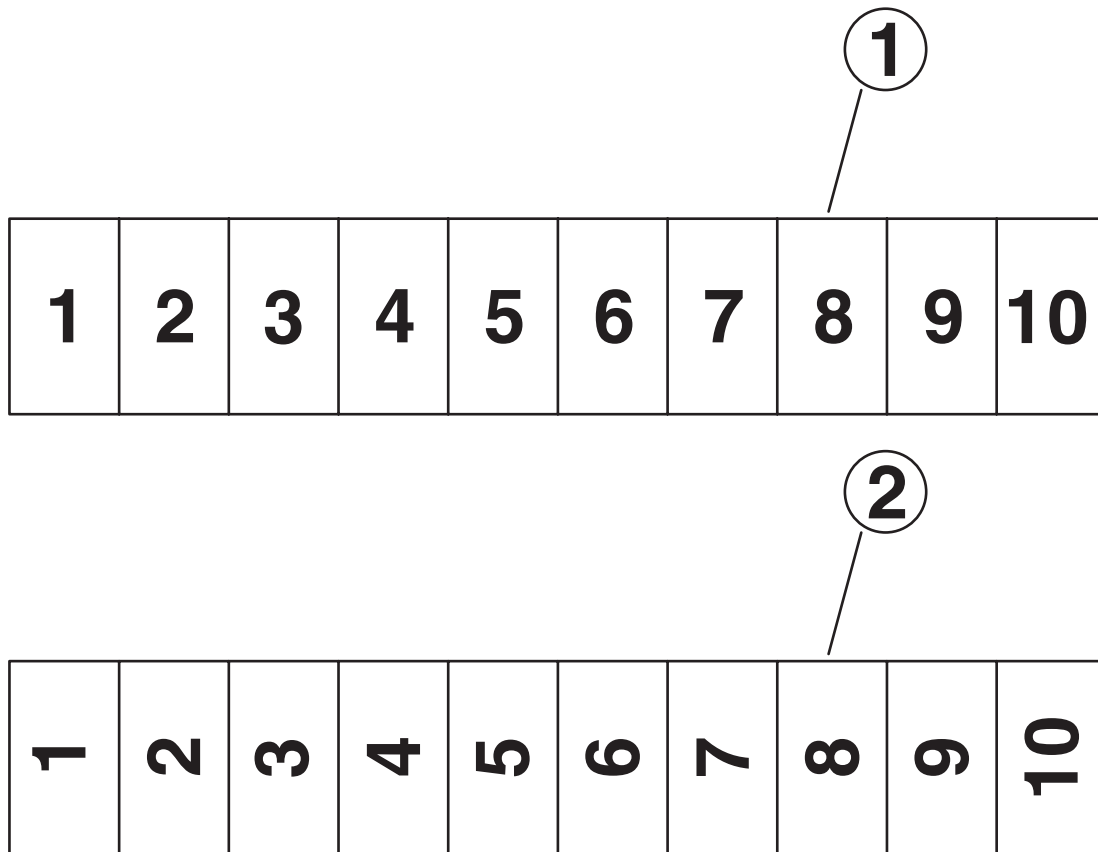

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat



0810863

<https://www.phoenixcontact.com/pc/products/0810863>

Classifications

ECLASS

ECLASS-11.0	27281101
ECLASS-12.0	27281101
ECLASS-13.0	27281101

ETIM

ETIM 8.0	EC000761
----------	----------

UNSPSC

UNSPSC 21.0	39131500
-------------	----------

ZBF 5,LGS:UNGERADE ZAHLEN - Zack Marker strip, flat



0810863

<https://www.phoenixcontact.com/pc/products/0810863>

Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

info@phoenixcontact.com