

# ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat



0808697

<https://www.phoenixcontact.com/pc/products/0808697>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Zack Marker strip, flat, Strip, white, labeled, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100, mounting type: snapped, for terminal block width: 5 mm, lettering field size: 5.15 x 5.15 mm, Number of individual labels: 10

## Your advantages

- Labeling service: Phoenix Contact can custom-label all zack marker strip markers according to your requirements
- Unlabeled marking strips can be custom-labeled with a plotter or by hand
- Other pitches available on request
- The ZBF zack marker strip system with flat marker groove is a marking solution for modular terminal blocks and electronics modules
- The multi-section marking strips are easy to fit and can be easily separated if required

## Commercial data

Item number	0808697
Packing unit	10 pc
Minimum order quantity	10 pc
Product key	BG2122
Catalog page	Page 127 (C-3-2019)
Weight per piece (including packing)	0.52 g
Weight per piece (excluding packing)	0.52 g
Customs tariff number	49119900
Country of origin	DE

# ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat



0808697

<https://www.phoenixcontact.com/pc/products/0808697>

## Technical data

### Product properties

Product type	Labeled terminal marker
Pitch	5 mm
Type	flat

### Marking

Number of individual labels	10
Number of individual labels per row	10
Number of marker strips	10
Printing direction	Printed vertically
Printing	consecutive numbers 1 ... 10, 11 ... 20, etc. up to 91 ... 100

### Mounting

Mounting type	snapped
---------------	---------

### Material specifications

Color	white
Material	PA
Flammability rating according to UL 94	V2
Components	free from silicone and halogen

### Environmental and real-life conditions

#### UV resistance

Specification	ISO 4892-2:2013-03 (following)
---------------	--------------------------------

#### Wipe resistance of inscriptions

Specification	DIN EN 61010-1 (VDE 0411-1):2011-07
	DIN EN 62208 (VDE 0660-511):2012-06 (in parts)

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 100 °C
Recommended ambient temperature (storage/transport)	23 °C
Recommended humidity (storage/transport)	50 %

### Dimensions

Width	5 mm
Pitch	5 mm

### Standards and regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
-----------------	-----------------------------

### Notes

General	For labeling according to customer requirements, please select
---------	--

# ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat

0808697

<https://www.phoenixcontact.com/pc/products/0808697>




---

product 0825025

Drawings

Schematic diagram

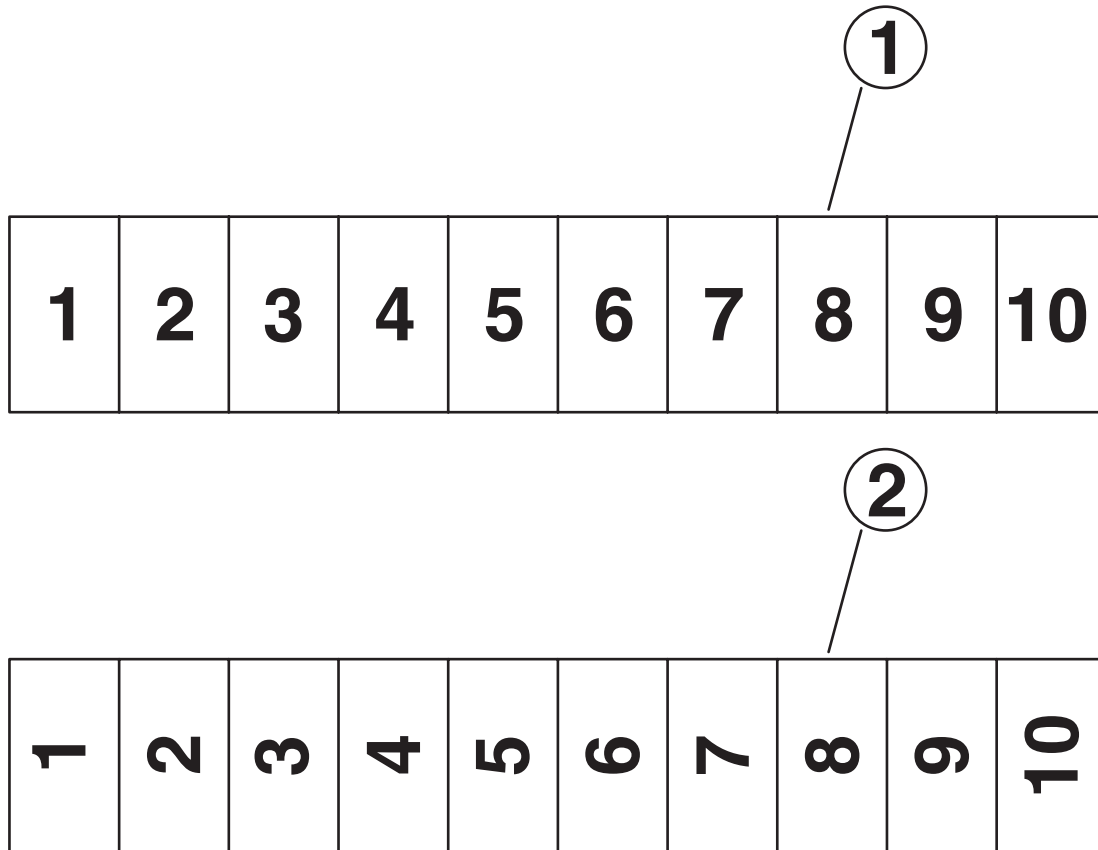

# ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat



0808697

<https://www.phoenixcontact.com/pc/products/0808697>

## Classifications

### ECLASS

ECLASS-11.0	27281101
ECLASS-12.0	27281101
ECLASS-13.0	27281101

### ETIM

ETIM 8.0	EC000761
----------	----------

### UNSPSC

UNSPSC 21.0	39131500
-------------	----------

# ZBF 5,QR:FORTL.ZAHLEN - Zack Marker strip, flat



0808697

<https://www.phoenixcontact.com/pc/products/0808697>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes, No exemptions
---	--------------------

### EU REACH SVHC

REACH candidate substance (CAS No.)	No substance above 0.1 wt%
-------------------------------------	----------------------------

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG

Flachsmarktstraße 8

D-32825 Blomberg

+49 (0) 5235-3 00

[info@phoenixcontact.com](mailto:info@phoenixcontact.com)