

## Electronic circuit breaker - ECP-E2-6A - 0900634

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Electronic circuit breaker, number of positions: 1, connection method: Screw connection, width: 12.5 mm, fuse type: electronic, fuse type: Automatic device, mounting type: on base element, Color: black

### Your advantages

- ✓ Includes the advantages of current limitation
- ✓ Output voltage of switched-mode power supply unit remains stable
- ✓ Sufficient supply of all error-free load circuits
- ✓ Responds faster than switched-mode power supply unit to overload and short circuit
- ✓ Application - all aspects of the switched-mode power supply unit
- ✓ In addition, the ECP-E2 can be controlled remotely by the control input (12), e.g., by means of a PLC



### Key Commercial Data

|                                      |               |
|--------------------------------------|---------------|
| Packing unit                         | 1 pc          |
| GTIN                                 |               |
| GTIN                                 | 4046356106955 |
| Weight per Piece (excluding packing) | 43.900 g      |
| Custom tariff number                 | 85363030      |
| Country of origin                    | Germany       |

### Technical data

#### General

|                           |   |
|---------------------------|---|
| Installation instructions | When mounted in rows without convection cooling, the nominal device current should only be led to a maximum of 80% due to the thermal effect during continuous operation (100% operating factor). Special precautionary measures must be taken in systems or machines, to prevent components from restarting (e.g., use of a safety PLC). |
|---------------------------|---|

# Electronic circuit breaker - ECP-E2-6A - 0900634

## Technical data

### General

|  |  |
|--|--|
|  | Parallel connection of multiple circuit breakers is not permitted. |
| Mounting type                          | on base element  |
| Color                                  | black  |
| Number of positions                    | 1  |
| Overvoltage category                   | II   |
| Insulating material                    | PA66/6   |
| Flammability rating according to UL 94 | V0   |

### Electrical data

|                                    |   |
|------------------------------------|---|
| Fuse                               | electronic  |
| Fuse type                          | Automatic device  |
| Rated surge voltage                | 0.5 kV  |
| Operating voltage                  | 24 V DC   |
|                                    | 24 V DC (at 50 °C (UL 2367, UL 508, ANSI/ISA 12.12.01)) |
|                                    | 18 V DC ... 32 V DC                                     |
| Nominal current $I_N$              | 6 A   |
| Required backup fuse               | not required, integrated failsafe element               |
| Dielectric strength                | max. 32 V DC (Load circuit)                             |
| Degree of pollution                | 2   |
| Overvoltage category               | II  |
| Insulating material group          | I   |
| Switching capacity $I_{CN}$        | Active current limitation                               |
| Closed-circuit current range $I_O$ | typ. 25 mA $\pm$ 5 mA (When switched on)                |

### Dimensions

|                        |          |
|------------------------|----------|
| Height                 | 60 mm    |
| Width                  | 12.5 mm  |
| Depth                  | 70 mm    |
| Height NS 35/7,5       | 144 mm   |
| Height NS 35/15        | 151.5 mm |
| Complete module height | 115 mm   |
| Complete module width  | 38 mm    |
| Complete module depth  | 112.5 mm |

### Ambient conditions

|                                 |                                 |
|---------------------------------|---------------------------------|
| Degree of protection            | IP30 (Actuation area)           |
| Ambient temperature (operation) | 0 °C ... 50 °C (non-condensing) |

### Connection data

|                   |                  |
|-------------------|------------------|
| Connection method | Screw connection |
|-------------------|------------------|

# Electronic circuit breaker - ECP-E2-6A - 0900634

## Technical data

### Standards and Regulations


|                          |                 |
|--------------------------|-----------------|
| Standards/specifications | UL 2367         |
|                          | UL 508          |
|                          | CSA 22.2 No. 14 |

### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50 years  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |


## Drawings

Block diagram



# Electronic circuit breaker - ECP-E2-6A - 0900634

Diagram

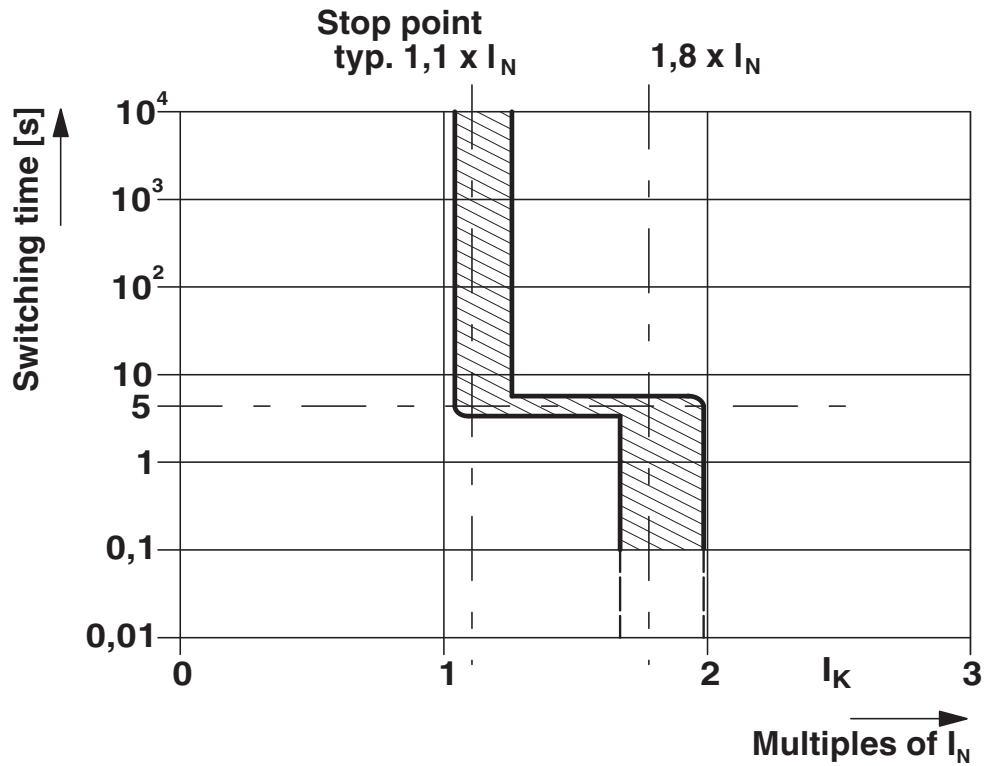

## Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27140401 |
| eCl@ss 11.0   | 27140401 |
| eCl@ss 4.0    | 27141100 |
| eCl@ss 4.1    | 27141100 |
| eCl@ss 5.0    | 27141100 |
| eCl@ss 5.1    | 27141100 |
| eCl@ss 6.0    | 27141100 |
| eCl@ss 7.0    | 27141116 |
| eCl@ss 9.0    | 27141116 |

ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000899 |
| ETIM 3.0 | EC000899 |
| ETIM 4.0 | EC000899 |
| ETIM 6.0 | EC000899 |

# Electronic circuit breaker - ECP-E2-6A - 0900634

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 7.0 | EC000899 |
|----------|----------|

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211812 |
| UNSPSC 7.0901 | 39121411 |
| UNSPSC 11     | 39121411 |
| UNSPSC 12.01  | 39121411 |
| UNSPSC 13.2   | 39121410 |
| UNSPSC 18.0   | 39121410 |
| UNSPSC 19.0   | 39121410 |
| UNSPSC 20.0   | 39121410 |
| UNSPSC 21.0   | 39121410 |

## Approvals

### Approvals

---

#### Approvals

UL Recognized


---

#### Ex Approvals

UL Recognized / CSA

---

### Approval details

|               |   |   |               |
|---------------|---|---|---------------|
| UL Recognized |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | FILE E 317172 |
|---------------|---|---|---------------|

---