

Terminal outlet - VS-TO-IW-2-F-9010 - 1653016

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




Terminal outlet, flush-type mounting, IP20, two slots for contact inserts with the Freenet system

Your advantages

- ✔ Can be optionally equipped with copper and FO inserts
- ✔ Halogen free, according to DIN VDE 0472/815



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 962081
GTIN	4017918962081
Weight per Piece (excluding packing)	48.600 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

Dimensions

Width	80 mm
Length	80 mm

Ambient conditions

Degree of protection	IP20
Ambient temperature (operation)	5 °C ... 55 °C

General data

Housing material	PC+ABS
------------------	--------

Terminal outlet - VS-TO-IW-2-F-9010 - 1653016

Technical data

General data

Number of slots	2
-----------------	---

Standards and Regulations


Flammability rating according to UL 94	HB
--	----

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

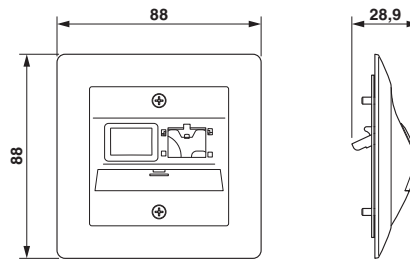

Terminal outlet

Classifications

eCl@ss

eCl@ss 10.0.1	27440318
eCl@ss 11.0	27440318
eCl@ss 4.0	27260700
eCl@ss 4.1	27260700
eCl@ss 5.0	27260700
eCl@ss 5.1	27260700
eCl@ss 6.0	27260700
eCl@ss 7.0	27440309
eCl@ss 9.0	27440318

ETIM

ETIM 2.0	EC000764
ETIM 3.0	EC001121
ETIM 4.0	EC001121
ETIM 6.0	EC002597

Terminal outlet - VS-TO-IW-2-F-9010 - 1653016

Classifications

ETIM

ETIM 7.0	EC002597
----------	----------

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501
UNSPSC 18.0	31261501
UNSPSC 19.0	31261501
UNSPSC 20.0	31261501
UNSPSC 21.0	31261501

Approvals


Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.01687
-----	---	---------
