

## Protective covers - HC-D 25-SD-FL/FS - 1660135


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover D25, for single locking latch, protective cover material: PA, height: 20.5 mm, seal: yes, with lanyard, diameter of retaining cord eyelet: 30 mm



### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| Minimum order quantity               | 10 pc   |
| GTIN                                 | <br>4 017918 021870 |
| GTIN                                 | 4017918021870   |
| Weight per Piece (excluding packing) | 21.910 g  |
| Custom tariff number                 | 85389099  |
| Country of origin                    | Germany   |

### Technical data

#### Dimensions

|                                   |         |
|-----------------------------------|---------|
| Length                            | 79.5 mm |
| Width                             | 32.5 mm |
| Height                            | 20.5 mm |
| Diameter of retaining cord eyelet | 30 mm   |

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Degree of protection            | IP66              |
| Ambient temperature (operation) | -20 °C ... 100 °C |

#### General

|      |     |
|------|-----|
| Size | D25 |
|------|-----|

## Protective covers - HC-D 25-SD-FL/FS - 1660135

### Technical data

#### General

|  |   |
|--|---|
| Type                                   | for supporting base element with single locking latch |
| Material                               | PA  |
| Seal material                          | NBR   |
| Flammability rating according to UL 94 | V2  |
| Color                                  | gray  |
| Seal present                           | yes   |
| Connection                             | Plastic protective cover for short-term protection    |

#### Standards and Regulations


|  |    |
|--|----|
| Flammability rating according to UL 94 | V2 |
|--|----|

#### Environmental Product Compliance

|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

### Drawings

Dimensional drawing

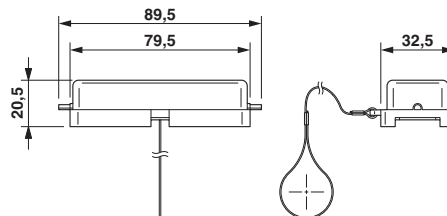

Dimensional drawing

### Classifications

eCl@ss

|               |          |
|---------------|----------|
| eCl@ss 10.0.1 | 27440208 |
| eCl@ss 11.0   | 27440208 |
| eCl@ss 4.0    | 27141200 |
| eCl@ss 4.1    | 27141200 |
| eCl@ss 5.0    | 27149100 |
| eCl@ss 5.1    | 27149100 |
| eCl@ss 6.0    | 27261200 |
| eCl@ss 7.0    | 27440208 |
| eCl@ss 9.0    | 27440208 |

## Protective covers - HC-D 25-SD-FL/FS - 1660135

### Classifications

#### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000241 |
| ETIM 3.0 | EC002040 |
| ETIM 4.0 | EC002314 |
| ETIM 6.0 | EC002314 |
| ETIM 7.0 | EC002314 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212113 |
| UNSPSC 7.0901 | 39121712 |
| UNSPSC 11     | 39121712 |
| UNSPSC 12.01  | 39121712 |
| UNSPSC 13.2   | 39121421 |
| UNSPSC 18.0   | 39121421 |
| UNSPSC 19.0   | 39121421 |
| UNSPSC 20.0   | 39121421 |
| UNSPSC 21.0   | 39121421 |

### Approvals

#### Approvals

---

#### Approvals


#### EAC

---

#### Ex Approvals

---

### Approval details

|     |   |                          |
|-----|---|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|---|--------------------------|