

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



INTERBUS-ST digital input/output module, eight inputs, 24 V DC, eight outputs, 24 V DC, 2 A, IP20 degree of protection, consisting of: Terminal part with screw connection and module electronics

Product Description

INTERBUS-ST digital input and output modules

The digital INTERBUS input/output modules provide connection options for 8 sensors and 8 actuators in 3-conductor technology.

The module electronics have a plug-in design. In the event of an error, the passive basic terminal block remains on the DIN rail and the active electronics are replaced in just a few steps.

The modules are protected against polarity reversal and the outputs are additionally protected against short circuits with fuses. The state of the fuses is monitored; any errors that occur are reported to the controller.

Contact with the protective grounding is established directly when the modules are snapped onto the DIN rail.

The input/output status LED and bus diagnostics indicators on the top of the module electronics provide information about the module state at all times.


All modules can be marked individually via the large pull-out marking field. The insert cards can be marked by hand or using a plotter or printer. In addition, the terminal points can be marked individually with zack marker strips.

Your advantages

- ✓ 8 digital outputs
- ✓ 8 digital inputs
- ✓ Connection of actuators in 3-conductor technology
- ✓ Connection of sensors in 3-conductor technology
- ✓ Electrical isolation
- ✓ Diagnostic and status indicators
- ✓ DIN rail mounting



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 062880
GTIN	4017918062880
Weight per Piece (excluding packing)	710.000 g

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Custom tariff number	85389091
Country of origin	Germany

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---------------------------------------------------------------------------

Dimensions

Width	118 mm
Height	117 mm
Depth	116 mm

Ambient conditions

Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	30 % ... 75 % (non-condensing)
Permissible humidity (storage/transport)	30 % ... 95 % (non-condensing)
Air pressure (operation)	86 kPa ... 108 kPa (1500 m above sea level)
Air pressure (storage/transport)	66 kPa ... 108 kPa (3500 m above sea level)
Degree of protection	IP20

Interfaces

Designation	ST local bus
Connection method	ST local bus connector
Transmission speed	500 kbps

Digital inputs

Input name	Digital inputs
Connection method	Screw connection
Connection technology	3-conductor
Number of inputs	8
Typical response time	3 ms (typ.)
Protective circuit	Overload protection Fuse in header
Nominal input current at U_{IN}	typ. 5 mA (per channel)
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	13 V DC ... 30 V DC

Digital outputs

Output name	Digital outputs
Connection method	Screw connection
Connection technology	3-conductor

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Technical data

Digital outputs

Number of outputs	8
Protective circuit	Short-circuit protection Fuse
	Overload protection Fuse in header

Power supply for module electronics

Supply voltage	24 V DC
Supply voltage range	20 V DC ... 30 V DC (including ripple)
Ripple	3.6 V _{pp} within the allowable voltage range
Current consumption	0.2 A

General

Mounting type	DIN rail
Net weight	710 g
Mounting position	Horizontal DIN rail

Electrical isolation

Test section	Bus logic / I/O 500 V AC 50 Hz 1 min.
	I/O / Ground conductor 500 V AC 50 Hz 1 min.

Standards and Regulations


Connection in acc. with standard	CUL
Protection class	III (IEC 61140, EN 61140, VDE 0140-1)

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Connection diagram

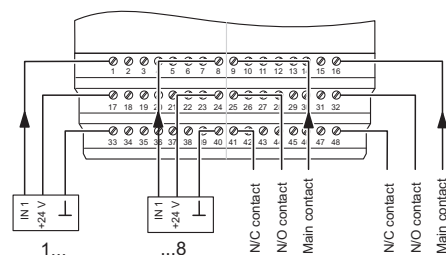

I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Classifications

eCl@ss

eCl@ss 10.0.1	27242604
eCl@ss 11.0	27242604
eCl@ss 4.0	27250300
eCl@ss 4.1	27250300
eCl@ss 5.0	27250300
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600
eCl@ss 7.0	27242604
eCl@ss 9.0	27242604

ETIM

ETIM 2.0	EC001430
ETIM 3.0	EC001599
ETIM 4.0	EC001599
ETIM 6.0	EC001599
ETIM 7.0	EC001599

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	32151602
UNSPSC 18.0	32151602
UNSPSC 19.0	32151602
UNSPSC 20.0	32151602
UNSPSC 21.0	32151602

Approvals

Approvals

Approvals


UL Recognized / cUL Recognized / EAC / cULus Recognized


Ex Approvals


I/O module - IB ST 24 DIO 8/8/3-2A - 2753708

Approvals

Approval details

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
mm²/AWG/kcmil		30-12	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 140324
mm²/AWG/kcmil		30-12	

EAC		EAC-Zulassung
-----	-----------------------------------------------------------------------------------	---------------

cULus Recognized	
------------------	-------------------------------------------------------------------------------------