

https://www.phoenixcontact.com/us/products/2809241



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Wiring bridge for modules with connecting pitch 17.5 mm, 3-phase, 6-pos.



Your advantages

- · In combination with other devices in the distribution board, such as residual current devices and miniature circuit breakers
- · Practical wiring of all common applications
- · For combinations of lightning and surge arresters
- End covers are used to terminate and insulate individually cut bridges

Commercial data

Item number	2809241
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	CL18
Product key	CL132Z
Catalog page	Page 61 (C-6-2013)
GTIN	4017918076313
Weight per piece (including packing)	57.36 g
Weight per piece (excluding packing)	56.8 g
Customs tariff number	85369095
Country of origin	DE



https://www.phoenixcontact.com/us/products/2809241



Technical data


Product properties

Туре	Comb bridge
Product type	Bridge
Number of positions	6

Electrical properties

Number of phases	3
Nominal current I _N	80 A

Dimensions

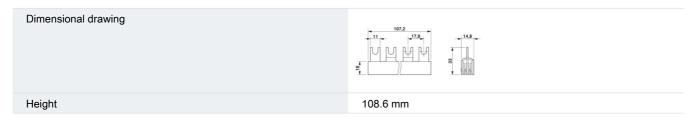

Material specifications

Color	gray (RAL 7042)
	Copper
Contact material	E-Cu 58
Housing material	Plastic



https://www.phoenixcontact.com/us/products/2809241



Classifications

ECLASS

	ECLASS-11.0	27371306		
	ECLASS-12.0	27371306		
	ECLASS-13.0	27371306		
ETIM				
	ETIM 9.0	EC000215		

UNSPSC



https://www.phoenixcontact.com/us/products/2809241



Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 @ - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com