


## Inline terminal - IB IL EX-IS TEMP 4 RTD/TC-PAC - 2869913

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Inline intrinsically safe temperature terminal, 4 configurable input channels, complete with accessories




### Your advantages

- ✓ Fieldbus-independent diagnostics using FDT/DTM technology
- ✓ Module-based electrical isolation
- ✓ RTD inputs: Pt 100, etc.
- ✓ 2- or 3-conductor RTD sensors
- ✓ Single-channel diagnostics
- ✓ 4 configurable I/O channels
- ✓ TC inputs: J, K, E, etc.



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 470179
GTIN	4046356470179
Weight per Piece (excluding packing)	227.000 g
Custom tariff number	85389099
Country of origin	United States

### Technical data

#### Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
	Use in potentially explosive areas is not permitted in China.

# Inline terminal - IB IL EX-IS TEMP 4 RTD/TC-PAC - 2869913

## Technical data

### Dimensions

Width	48.8 mm
Height	136.8 mm
Depth	71.5 mm

### Ambient conditions

Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	10 % ... 95 % (according to DIN EN 61131-2)
Air pressure (operation)	70 kPa ... 106 kPa (up to 3000 m above sea level)
Degree of protection	IP20
	IP20

### General

Mounting type	DIN rail
Color	blue
Net weight	222 g

### Interfaces

Designation	Inline local bus
Connection method	Inline data jumper
Transmission speed	500 kbps

### Inline potentials

Designation	Communications power ( $U_L$ )
Supply voltage	5 V DC (via voltage jumper)
Current consumption	max. 50 mA
Supply voltage	28 V DC
Current consumption	max. 80 mA
Power consumption	1.5 W (all channels)

### Analog inputs

Voltage input signal	-15 mV ... 85 mV
Number of inputs	4
Connection method	Inline shield connector
Connection technology	2-, 3-conductor
Sensor types (RTD) that can be used	2 and 3-wire, Pt, Ni (DIN 100, 200, 500, 1000)
Sensor types that can be used (TC)	J, K, E, R, S, T
Linear resistance measuring range	0 $\Omega$ ... 800 $\Omega$
	0 $\Omega$ ... 5000 $\Omega$
A/D converter resolution	16 bit (15 bit + sign bit)

# Inline terminal - IB IL EX-IS TEMP 4 RTD/TC-PAC - 2869913

## Technical data

### Analog inputs

Type of protection	Polarity protection, surge protection
Data formats	IB IL, S7-compatible

### Standards and Regulations


Group	IIC (A, B)
	IIB, [IIIC, IIIB] (C, E, F, G)
	IIA (D)
ATEX	# II 3(1)GD Ex nA [ia Ga Da] IIC T4 Gc Sira 09ATEX2339X
IECEX	Ex nA [ia Ga Da] IIC T4 Gc IECEX SIR 10.0033X
UL, USA/Canada	Class I, Div. 2, Groups A, B, C, D

### Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Connection diagram

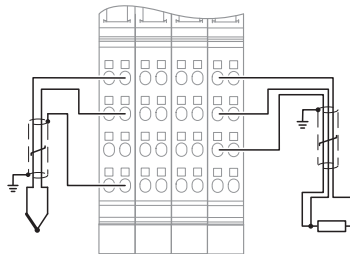

Dimensional drawing

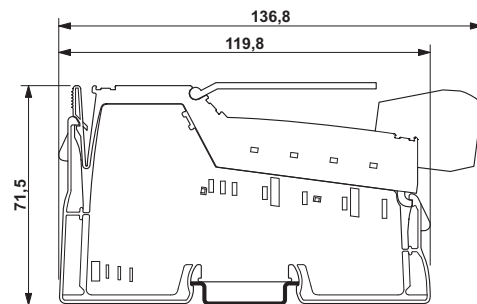

## Classifications

### eCl@ss

eCl@ss 10.0.1	27242601
eCl@ss 11.0	27242601
eCl@ss 4.0	27240400
eCl@ss 4.1	27240400
eCl@ss 5.0	27242200
eCl@ss 5.1	27242600
eCl@ss 6.0	27242600

## Inline terminal - IB IL EX-IS TEMP 4 RTD/TC-PAC - 2869913

### Classifications

#### eCl@ss

eCl@ss 7.0	27242601
eCl@ss 9.0	27242601

#### ETIM

ETIM 3.0	EC001596
ETIM 4.0	EC001596
ETIM 6.0	EC001596
ETIM 7.0	EC001596

#### UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	32151602
UNSPSC 18.0	32151602
UNSPSC 19.0	32151602
UNSPSC 20.0	32151602
UNSPSC 21.0	32151602