
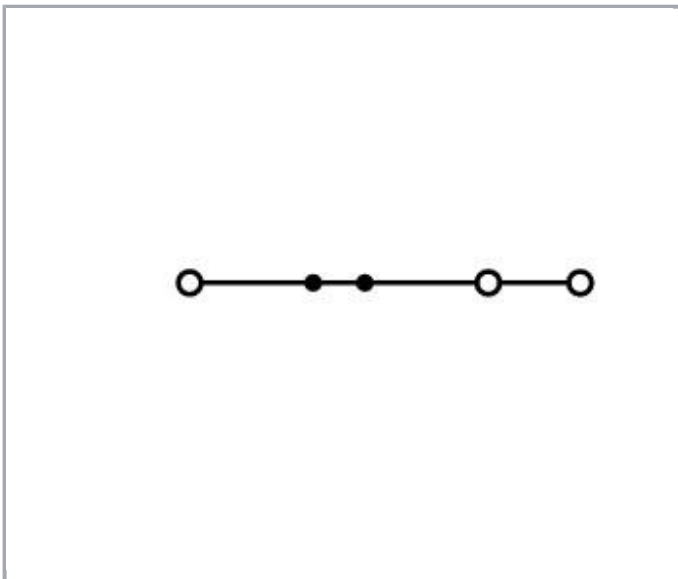
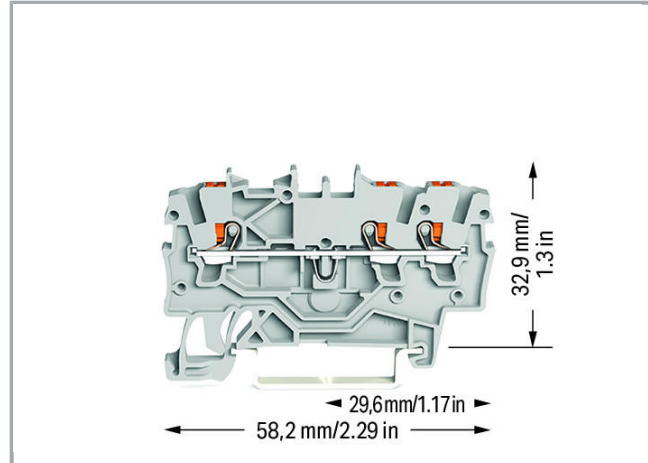


**Data sheet | Item number: 2200-1301**

3-conductor through terminal block; with push-button; 1 mm<sup>2</sup>; with test port; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 1,00 mm<sup>2</sup>; gray

[www.wago.com/2200-1301](http://www.wago.com/2200-1301)

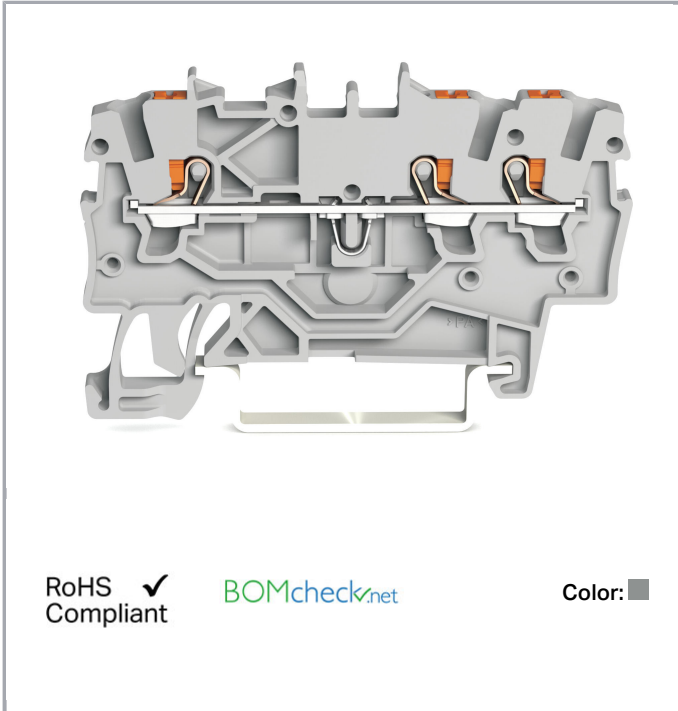

**Data**

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



## Electrical data

### Ratings per IEC/EN 60664-1

|                                 |   |
|---------------------------------|---|
| Ratings per                     | IEC/EN 60947-7-1  |
| Rated voltage (III / 3)         | 800 V   |
| Rated impulse voltage (III / 3) | 8 kV  |
| Rated current                   | 13.5 A  |
| Rated current (2)               | 17.5 A  |
| Legend (ratings)                | (III / 3) ≙ Overvoltage category III / Pollution degree 3 |

### Approvals per UL 1059

|                                |         |
|--------------------------------|---------|
| Rated voltage UL (Use Group B) | 600 V   |
| Rated current UL (Use Group B) | 10 A    |
| Rated voltage UL (Use Group C) | 600 V   |
| Rated current UL (Use Group C) | 10 A    |
| Approvals per                  | UL 1059 |

## Connection data

|   |   |
|---|---|
| Connection technology   | Push-in CAGE CLAMP®   |
| Actuation type  | Push-in<br>Push-button  |
| Connectable conductor materials                                 | Copper  |
| Nominal cross section   | 1 mm <sup>2</sup>   |
| Solid conductor   | 0,14 ... 1,5 mm <sup>2</sup> / 24 ... 16 AWG  |
| Solid conductor, push-in termination                            | 0,5 ... 1,5 mm <sup>2</sup> / 20 ... 16 AWG   |
| Fine-stranded conductor   | 0,14 ... 1,5 mm <sup>2</sup> / 24 ... 16 AWG  |
| Fine-stranded conductor with ferrule with plastic collar        | 0,5 ... 0,75 mm <sup>2</sup> / 20 ... 18 AWG  |
| Fine-stranded conductor with ferrule, push-in termination, from | 0,5 ... 0,75 mm <sup>2</sup> / 20 ... 18 AWG  |
| Strip length  | 9 ... 11 mm / 0.35 ... 0.43 inch  |
| Total number of connection points                               | 3   |
| Total number of potentials                                      | 1   |
| Number of levels  | 1   |
| Type of wiring  | Front-entry wiring  |
| Note (conductor cross-section)                                  | Depending on the conductor characteristic, a conductor with a smaller cross section can also be inserted via push-in termination. |
| Number of jumper slots  | 2   |

Subject to changes. Please also observe the further product documentation!

## Geometrical Data

|                                       |                      |
|---------------------------------------|----------------------|
| Width                                 | 3,5 mm / 0.138 inch  |
| Height from upper-edge of DIN-35 rail | 32,9 mm / 1.295 inch |
| Depth                                 | 58,2 mm / 2.291 inch |

## Mechanical data

|                  |                     |
|------------------|---------------------|
| Design           | horizontal          |
| Type of mounting | DIN-35 rail         |
| Marking level    | Center/side marking |

## Material Data




|                     |                      |
|---------------------|----------------------|
| Color               | gray                 |
| Insulating material | Polyamide 66 (PA 66) |
| Weight              | 4.2 g                |

## Commercial data

|                    |               |
|--------------------|---------------|
| Packaging type     | BOX           |
| Country of origin  | DE            |
| GTIN               | 4055143691611 |
| Customs Tariff No. | 85369010000   |




## Approvals / Certificates

### Ex-Approvals




| Logo   | Approval                                       | Additional Approval Text | Certificate name   |
|--|--|--------------------------|--|
|  | AEx<br>Underwriters Laboratories Inc.          | UL 60079                 | 4788311594   |
|  | ATEX<br>Physikalisch Technische Bundesanstalt  | IEC 60079-0              | PTB 18<br>ATEX 1003<br>U                                     |
|  | IECEX<br>Physikalisch Technische Bundesanstalt | IEC 60079                | IECEX PTB<br>18.0010U<br>(Ex eb IIC<br>Gb and Ex<br>eb I Mb) |

Subject to changes. Please also observe the further product documentation!


## Country specific Approvals

| Logo   | Approval                                     | Additional Approval Text | Certificate name |
|--|--|--------------------------|------------------|
|  | <b>CCA</b><br>DEKRA Certification B.V.       | EN 60947                 | NTR NL<br>7663   |
|  | <b>CSA</b><br>DEKRA Certification B.V.       | C22.2                    | 70173737         |
|  | <b>KEMA/KEUR</b><br>DEKRA Certification B.V. | EN 60947                 | 71-<br>102874    |

## Ship Approvals

| Logo  | Approval  | Additional Approval Text | Certificate name         |
|---|---|--------------------------|--------------------------|
|    | <b>ABS</b><br>American Bureau of Shipping               | -                        | 19-<br>HG1866350-<br>PDA |
|   | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAE00003JT               |
|  | <b>LR</b><br>Lloyds Register                            | -                        | 19/20050                 |

## UL-Approvals

| Logo   | Approval                                       | Additional Approval Text | Certificate name |
|--|--|--------------------------|------------------|
|  | <b>cURus</b><br>Underwriters Laboratories Inc. | UL 1059                  | 4788311592       |

## Counterpart



Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)



Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.

## Compatible products



## End plate

|  |  |  |
|--|--|--|
|  | <b>Item no.: 2000-1391</b><br>End and intermediate plate; 0.7 mm thick; gray   | <a href="http://www.wago.com/2000-1391">www.wago.com/2000-1391</a> |
|  | <b>Item no.: 2000-1392</b><br>End and intermediate plate; 0.7 mm thick; orange | <a href="http://www.wago.com/2000-1392">www.wago.com/2000-1392</a> |

## ferrule

|   |  |  |
|---|--|--|
|  | <b>Item no.: 216-241</b><br>Ferrule; Sleeve for 0.5 mm <sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white | <a href="http://www.wago.com/216-241">www.wago.com/216-241</a> |
|  | <b>Item no.: 216-242</b><br>Ferrule; Sleeve for 0.75 mm <sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray | <a href="http://www.wago.com/216-242">www.wago.com/216-242</a> |
|   | <b>Item no.: 216-243</b><br>Ferrule; Sleeve for 1 mm <sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red     | <a href="http://www.wago.com/216-243">www.wago.com/216-243</a> |

## tools

|  |  |  |
|--|--|--|
|  | <b>Item no.: 210-647</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft                | <a href="http://www.wago.com/210-647">www.wago.com/210-647</a> |
|  | <b>Item no.: 210-648</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; angled; short | <a href="http://www.wago.com/210-648">www.wago.com/210-648</a> |
|  | <b>Item no.: 210-719</b><br>Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft                | <a href="http://www.wago.com/210-719">www.wago.com/210-719</a> |

## Jumper

|  |  |  |
|--|--|--|
|  | <b>Item no.: 2000-402</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-402">www.wago.com/2000-402</a>                 |
|  | <b>Item no.: 2000-402/000-005</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; red  | <a href="http://www.wago.com/2000-402/000-005">www.wago.com/2000-402/000-005</a> |
|  | <b>Item no.: 2000-402/000-006</b><br>Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; blue | <a href="http://www.wago.com/2000-402/000-006">www.wago.com/2000-402/000-006</a> |

Subject to changes. Please also observe the further product documentation!



**Item no.: 2000-402/000-018**

Push-in type jumper bar; insulated; 2-way; Nominal current 14 A; yellow-green

[www.wago.com/2000-402/000-018](http://www.wago.com/2000-402/000-018)

**Item no.: 2000-403**

Push-in type jumper bar; insulated; 3-way; Nominal current 14 A; light gray

[www.wago.com/2000-403](http://www.wago.com/2000-403)

**Item no.: 2000-403/000-005**

Push-in type jumper bar; insulated; 3-way; Nominal current 14 A; red

[www.wago.com/2000-403/000-005](http://www.wago.com/2000-403/000-005)

**Item no.: 2000-403/000-006**

Push-in type jumper bar; insulated; 3-way; Nominal current 14 A; blue

[www.wago.com/2000-403/000-006](http://www.wago.com/2000-403/000-006)

**Item no.: 2000-404**

Push-in type jumper bar; insulated; 4-way; Nominal current 14 A; light gray

[www.wago.com/2000-404](http://www.wago.com/2000-404)

**Item no.: 2000-404/000-005**

Push-in type jumper bar; insulated; 4-way; Nominal current 14 A; red

[www.wago.com/2000-404/000-005](http://www.wago.com/2000-404/000-005)

**Item no.: 2000-404/000-006**

Push-in type jumper bar; insulated; 4-way; Nominal current 14 A; blue

[www.wago.com/2000-404/000-006](http://www.wago.com/2000-404/000-006)

**Item no.: 2000-405**

Push-in type jumper bar; insulated; 5-way; Nominal current 14 A; light gray

[www.wago.com/2000-405](http://www.wago.com/2000-405)

**Item no.: 2000-405/000-005**

Push-in type jumper bar; insulated; 5-way; Nominal current 14 A; red

[www.wago.com/2000-405/000-005](http://www.wago.com/2000-405/000-005)

**Item no.: 2000-405/000-006**

Push-in type jumper bar; insulated; 5-way; Nominal current 14 A; blue

[www.wago.com/2000-405/000-006](http://www.wago.com/2000-405/000-006)

**Item no.: 2000-405/011-000**

Star point jumper; insulated; 3-way (1-3-5); IN = IN terminal block; light gray

[www.wago.com/2000-405/011-000](http://www.wago.com/2000-405/011-000)

**Item no.: 2000-406**

Push-in type jumper bar; insulated; 6-way; Nominal current 14 A; light gray

[www.wago.com/2000-406](http://www.wago.com/2000-406)

**Item no.: 2000-406/000-005**

Push-in type jumper bar; insulated; 6-way; Nominal current 14 A; red

[www.wago.com/2000-406/000-005](http://www.wago.com/2000-406/000-005)

**Item no.: 2000-406/000-006**

Push-in type jumper bar; insulated; 6-way; Nominal current 14 A; blue

[www.wago.com/2000-406/000-006](http://www.wago.com/2000-406/000-006)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)



Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.








|   |  |
|---|--|
| <b>Item no.: 2000-406/020-000</b><br>Delta jumper; insulated; 1-2 3-4 5-6; IN = IN terminal block; light gray   | <a href="http://www.wago.com/2000-406/020-000">www.wago.com/2000-406/020-000</a> |
| <b>Item no.: 2000-407</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 14 A; light gray        | <a href="http://www.wago.com/2000-407">www.wago.com/2000-407</a>                 |
| <b>Item no.: 2000-407/000-005</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 14 A; red       | <a href="http://www.wago.com/2000-407/000-005">www.wago.com/2000-407/000-005</a> |
| <b>Item no.: 2000-407/000-006</b><br>Push-in type jumper bar; insulated; 7-way; Nominal current 14 A; blue      | <a href="http://www.wago.com/2000-407/000-006">www.wago.com/2000-407/000-006</a> |
| <b>Item no.: 2000-408</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 14 A; light gray        | <a href="http://www.wago.com/2000-408">www.wago.com/2000-408</a>                 |
| <b>Item no.: 2000-408/000-005</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 14 A; red       | <a href="http://www.wago.com/2000-408/000-005">www.wago.com/2000-408/000-005</a> |
| <b>Item no.: 2000-408/000-006</b><br>Push-in type jumper bar; insulated; 8-way; Nominal current 14 A; blue      | <a href="http://www.wago.com/2000-408/000-006">www.wago.com/2000-408/000-006</a> |
| <b>Item no.: 2000-409</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 14 A; light gray        | <a href="http://www.wago.com/2000-409">www.wago.com/2000-409</a>                 |
| <b>Item no.: 2000-409/000-005</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 14 A; red       | <a href="http://www.wago.com/2000-409/000-005">www.wago.com/2000-409/000-005</a> |
| <b>Item no.: 2000-409/000-006</b><br>Push-in type jumper bar; insulated; 9-way; Nominal current 14 A; blue      | <a href="http://www.wago.com/2000-409/000-006">www.wago.com/2000-409/000-006</a> |
| <b>Item no.: 2000-410</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 14 A; light gray       | <a href="http://www.wago.com/2000-410">www.wago.com/2000-410</a>                 |
| <b>Item no.: 2000-410/000-005</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 14 A; red      | <a href="http://www.wago.com/2000-410/000-005">www.wago.com/2000-410/000-005</a> |
| <b>Item no.: 2000-410/000-006</b><br>Push-in type jumper bar; insulated; 10-way; Nominal current 14 A; blue     | <a href="http://www.wago.com/2000-410/000-006">www.wago.com/2000-410/000-006</a> |
| <b>Item no.: 2000-433</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-433">www.wago.com/2000-433</a>                 |
| <b>Item no.: 2000-433/000-005</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 14 A; red | <a href="http://www.wago.com/2000-433/000-005">www.wago.com/2000-433/000-005</a> |

Subject to changes. Please also observe the further product documentation!

|   |  |
|---|--|
| <b>Item no.: 2000-433/000-006</b><br>Push-in type jumper bar; insulated; from 1 to 3; Nominal current 14 A; blue  | <a href="http://www.wago.com/2000-433/000-006">www.wago.com/2000-433/000-006</a> |
| <b>Item no.: 2000-434</b><br>Push-in type jumper bar; insulated; from 1 to 4; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-434">www.wago.com/2000-434</a>                 |
| <b>Item no.: 2000-435</b><br>Push-in type jumper bar; insulated; from 1 to 5; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-435">www.wago.com/2000-435</a>                 |
| <b>Item no.: 2000-436</b><br>Push-in type jumper bar; insulated; from 1 to 6; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-436">www.wago.com/2000-436</a>                 |
| <b>Item no.: 2000-437</b><br>Push-in type jumper bar; insulated; from 1 to 7; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-437">www.wago.com/2000-437</a>                 |
| <b>Item no.: 2000-438</b><br>Push-in type jumper bar; insulated; from 1 to 8; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-438">www.wago.com/2000-438</a>                 |
| <b>Item no.: 2000-439</b><br>Push-in type jumper bar; insulated; from 1 to 9; Nominal current 14 A; light gray  | <a href="http://www.wago.com/2000-439">www.wago.com/2000-439</a>                 |
| <b>Item no.: 2000-440</b><br>Push-in type jumper bar; insulated; from 1 to 10; Nominal current 14 A; light gray   | <a href="http://www.wago.com/2000-440">www.wago.com/2000-440</a>                 |
|  <b>Item no.: 210-103</b><br>Wire commoning chain; insulated; 50 connections; black                                      | <a href="http://www.wago.com/210-103">www.wago.com/210-103</a>                   |
|  <b>Item no.: 210-123</b><br>Wire commoning chain; insulated; 50 connections  | <a href="http://www.wago.com/210-123">www.wago.com/210-123</a>                   |
| <b>Push-In type wire jumper</b>   |  |
| <b>Item no.: 2009-402</b><br>Push-in type wire jumper; insulated; wire length 60 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray  | <a href="http://www.wago.com/2009-402">www.wago.com/2009-402</a>                 |
| <b>Item no.: 2009-404</b><br>Push-in type wire jumper; insulated; wire length 110 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray | <a href="http://www.wago.com/2009-404">www.wago.com/2009-404</a>                 |
| <b>Item no.: 2009-406</b><br>Push-in type wire jumper; insulated; wire length 250 mm; Conductor cross section 0.75 mm <sup>2</sup> ; suitable for 2000 and 2020 Series rail-mounted terminal blocks; gray | <a href="http://www.wago.com/2009-406">www.wago.com/2009-406</a>                 |
| <b>Carrier rail</b>   |  |
| <b>Item no.: 210-112</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm  | <a href="http://www.wago.com/210-112">www.wago.com/210-112</a>                   |
| <b>Item no.: 210-113</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715   | <a href="http://www.wago.com/210-113">www.wago.com/210-113</a>                   |
| <b>Item no.: 210-114</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715  | <a href="http://www.wago.com/210-114">www.wago.com/210-114</a>                   |

Subject to changes. Please also observe the further product documentation!



|  |  |  |
|--|--|--|
|  | <b>Item no.: 210-115</b><br>Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm   | <a href="http://www.wago.com/210-115">www.wago.com/210-115</a>   |
|  | <b>Item no.: 210-118</b><br>Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715                   | <a href="http://www.wago.com/210-118">www.wago.com/210-118</a>   |
|    | <b>Item no.: 210-196</b><br>Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored | <a href="http://www.wago.com/210-196">www.wago.com/210-196</a>   |
|  | <b>Item no.: 210-197</b><br>Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715                       | <a href="http://www.wago.com/210-197">www.wago.com/210-197</a>   |
|    | <b>Item no.: 210-198</b><br>Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored  | <a href="http://www.wago.com/210-198">www.wago.com/210-198</a>   |
| <b>Test Accessories</b>  |  |  |
|  | <b>Item no.: 2000-510</b><br>TOPJOB®S L-type test plug module; modular; for jumper contact slot; 1,00 mm <sup>2</sup> ; gray           | <a href="http://www.wago.com/2000-510">www.wago.com/2000-510</a> |
|  | <b>Item no.: 2000-511</b><br>TOPJOB®S L-type test plug module; modular; for jumper contact slot; 1-pole; 1,00 mm <sup>2</sup> ; gray   | <a href="http://www.wago.com/2000-511">www.wago.com/2000-511</a> |
|  | <b>Item no.: 2000-549</b><br>Spacer module; modular; e.g., for bridging commoned terminal blocks; gray                                 | <a href="http://www.wago.com/2000-549">www.wago.com/2000-549</a> |
|   | <b>Item no.: 2000-552</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-552">www.wago.com/2000-552</a> |
|  | <b>Item no.: 2000-553</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-553">www.wago.com/2000-553</a> |
|  | <b>Item no.: 2000-554</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-554">www.wago.com/2000-554</a> |
|  | <b>Item no.: 2000-555</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-555">www.wago.com/2000-555</a> |
|  | <b>Item no.: 2000-556</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-556">www.wago.com/2000-556</a> |
|  | <b>Item no.: 2000-557</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-557">www.wago.com/2000-557</a> |
|  | <b>Item no.: 2000-558</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-558">www.wago.com/2000-558</a> |
|  | <b>Item no.: 2000-559</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 1,00 mm <sup>2</sup> ; gray         | <a href="http://www.wago.com/2000-559">www.wago.com/2000-559</a> |
|  | <b>Item no.: 2000-560</b><br>Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 1,00 mm <sup>2</sup> ; gray        | <a href="http://www.wago.com/2000-560">www.wago.com/2000-560</a> |

Subject to changes. Please also observe the further product documentation!

**Item no.: 2009-174**

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray

[www.wago.com/2009-174](http://www.wago.com/2009-174)**Item no.: 2009-182**Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm; gray[www.wago.com/2009-182](http://www.wago.com/2009-182)**Item no.: 210-136**

Test plug; 2 mm Ø; with 500 mm cable; red

[www.wago.com/210-136](http://www.wago.com/210-136)**Item no.: 210-137**

Test plug; 2.3 mm Ø; with 500 mm cable; yellow

[www.wago.com/210-137](http://www.wago.com/210-137)**Marking accessories****Item no.: 2009-110**

Marking strips; on reel; not stretchable; plain; snap-on type; white

[www.wago.com/2009-110](http://www.wago.com/2009-110)**Item no.: 2009-113**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; white

[www.wago.com/2009-113](http://www.wago.com/2009-113)**Item no.: 2009-113/000-002**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; yellow

[www.wago.com/2009-113/000-002](http://www.wago.com/2009-113/000-002)**Item no.: 2009-113/000-005**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; red

[www.wago.com/2009-113/000-005](http://www.wago.com/2009-113/000-005)**Item no.: 2009-113/000-006**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; blue

[www.wago.com/2009-113/000-006](http://www.wago.com/2009-113/000-006)**Item no.: 2009-113/000-007**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; gray

[www.wago.com/2009-113/000-007](http://www.wago.com/2009-113/000-007)**Item no.: 2009-113/000-012**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; orange

[www.wago.com/2009-113/000-012](http://www.wago.com/2009-113/000-012)**Item no.: 2009-113/000-017**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; light green

[www.wago.com/2009-113/000-017](http://www.wago.com/2009-113/000-017)**Item no.: 2009-113/000-023**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; green

[www.wago.com/2009-113/000-023](http://www.wago.com/2009-113/000-023)**Item no.: 2009-113/000-024**

WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; violet

[www.wago.com/2009-113/000-024](http://www.wago.com/2009-113/000-024)**Item no.: 793-3501**

WMB marking card; as card; plain; snap-on type; white

[www.wago.com/793-3501](http://www.wago.com/793-3501)

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH &amp; Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.

## Downloads

### Documentation

#### Additional Information

Technical explanations

Apr 3, 2019

pdf  
2.1 MB

[Download](#)

## CAD/CAE-Data

### CAD data

2D/3D Models 2200-1301

[URL](#)

[Download](#)

### CAE data


EPLAN Data Portal 2200-1301

[URL](#)


[Download](#)

## Installation Notes

### Inserting a conductor

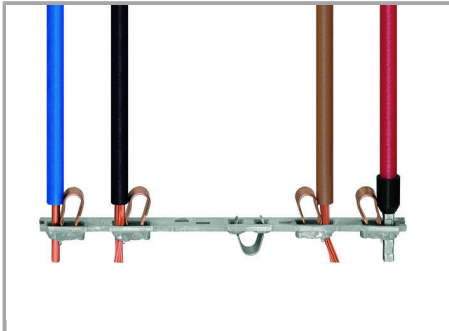

All conductor types at a glance

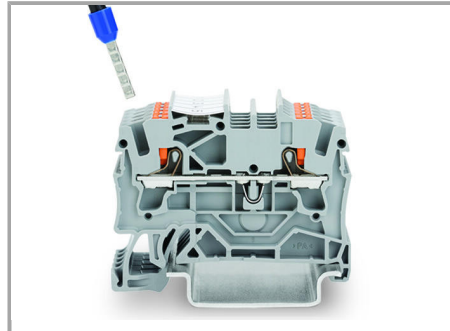

Push-in termination of solid and ferruled conductors




Insert fine-stranded conductors via operating tool.

Subject to changes. Please also observe the further product documentation!




Removing all conductors via operating tool.

### Jumpered

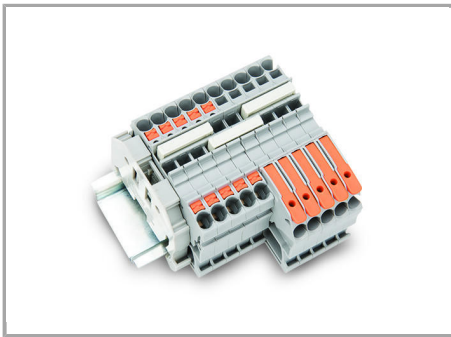


Insert push-in type jumper bar and push down until it hits backstop.

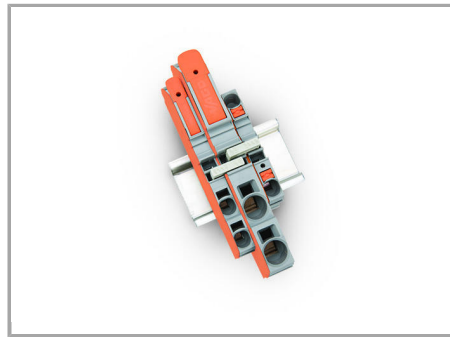

Commoning with step-down jumpers.



### Testing

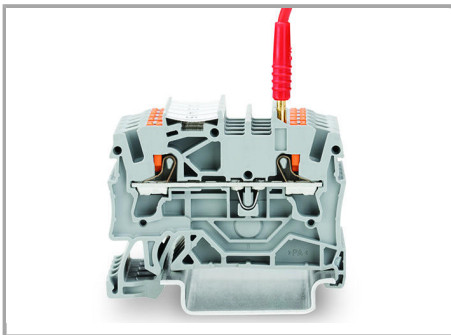

Testing with a 2 mm Ø test plug (max. 42 V).

### Marking

Subject to changes. Please also observe the further product documentation!

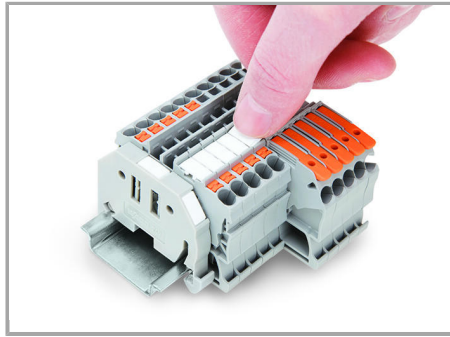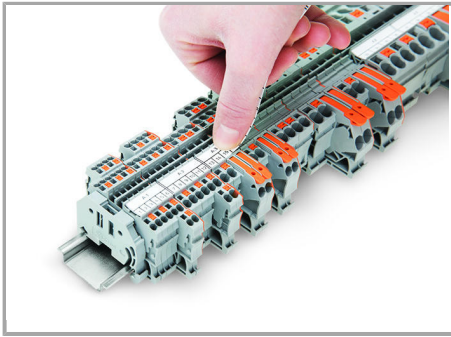

Snapping a marking strip into the marker slot.

Snapping a marking strip into the marker slot.

## Product family

### TOPJOB® S

TOPJOB® S: In various industrial applications and modern building installations, WAGO's wide and versatile range of rail-mount terminal blocks provides more than just reliable electrical connections.

[Learn more about the product family.](#)

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!