


Data sheet | Item number: 221-501

Mounting carrier; for Ex applications; 221 Series - 4 mm²; for DIN-35 rail mounting/screw mounting; light gray

www.wago.com/221-501

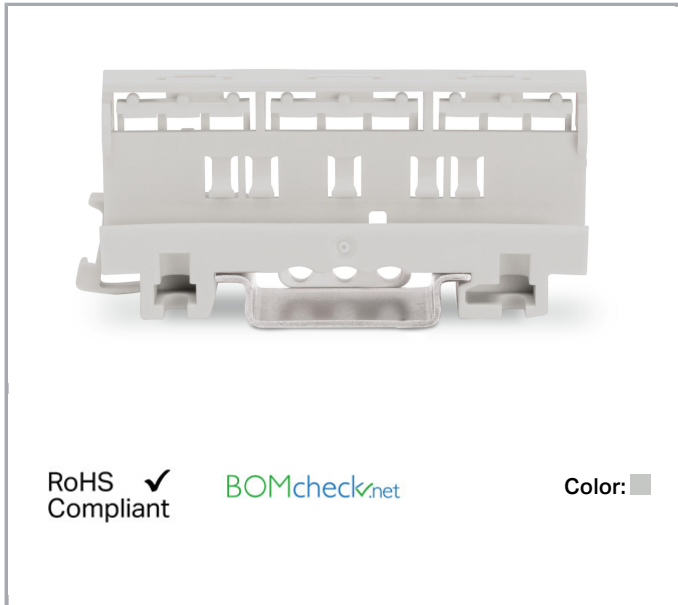

Data

Geometrical Data

Width	17,5 mm / 0.689 inch
Height from upper-edge of DIN-35 rail	25,5 mm / 1.004 inch
Depth	67,2 mm / 2.646 inch

Material Data

Color	light gray
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Fire load	0.289 MJ
Weight	9.6 g

Commercial data

Packaging type	BOX
Country of origin	CN
GTIN	4055143753449

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Counterpart

Downloads

Documentation

Additional Information


Technical explanations

Apr 3, 2019

pdf
2.1 MB


[Download](#)

Installation Notes

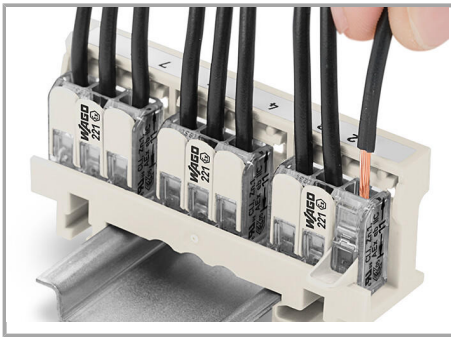


Removing a conductor.

Installation

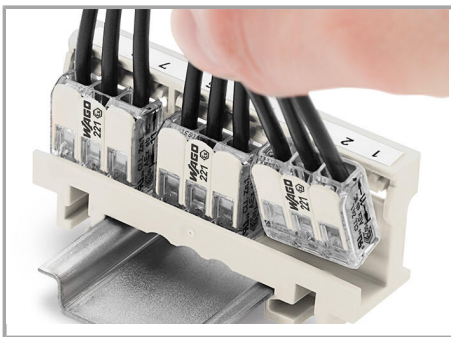


Inserting a connector into the mounting carrier.

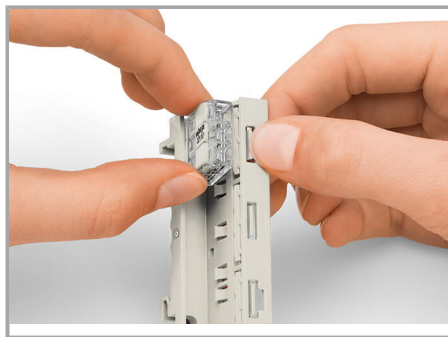

Removing a connector from the mounting carrier.

Subject to changes. Please also observe the further product documentation!

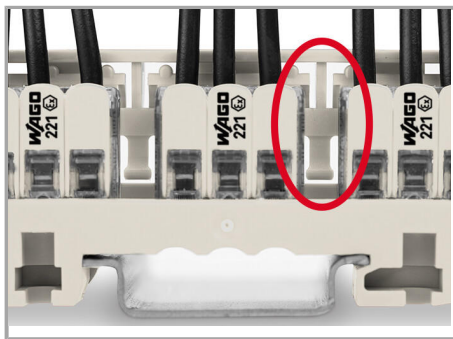


Mounting type (440 V)

Using spacers between the connectors.




Mounting type (440 V)

Vertical mounting on DIN-35 rail

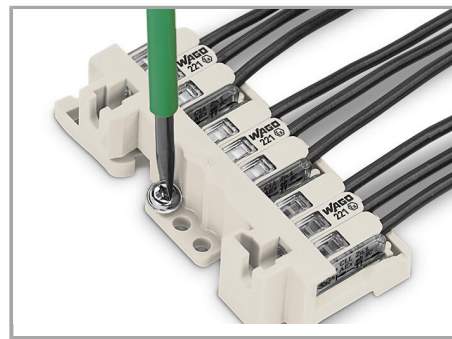


Mounting type (440 V)

Horizontal screw mounting on a flat surface

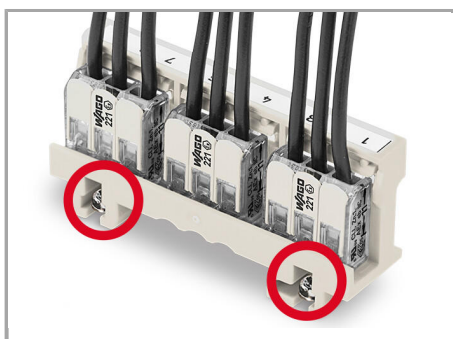


Mounting type (440 V)

Mounting the carrier via non-conductive screws.

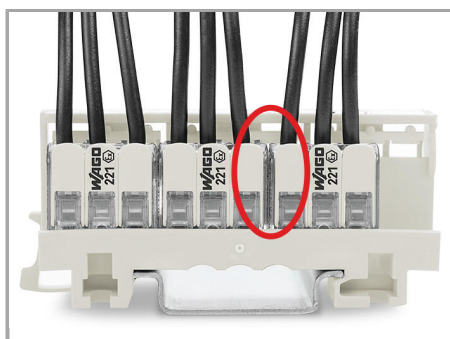


Mounting type (275 V)

No spacers are used between the connectors.

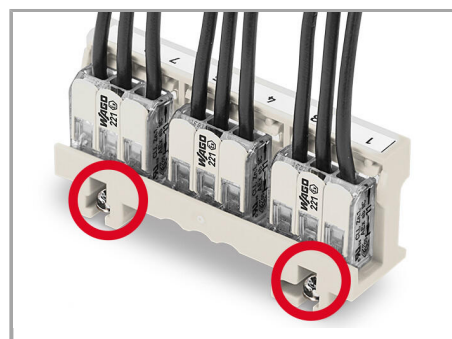

Mounting type (275 V)

Mounting the carrier using conductive screws.

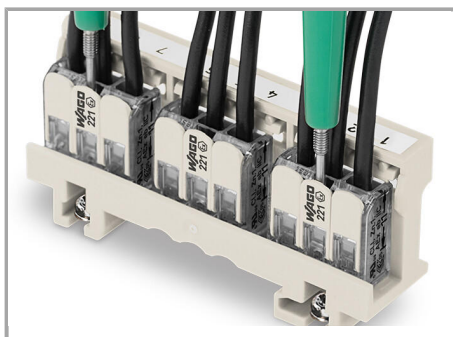

Easily test inserted connectors in the carrier
– without considering the type of mounting.

Subject to changes. Please also observe the further product documentation!