


## Data sheet | Item number: 221-515

Mounting carrier; for 5-conductor terminal blocks; 221 Series - 4 mm<sup>2</sup>; with snap-in mounting foot for horizontal mounting; white




[www.wago.com/221-515](http://www.wago.com/221-515)

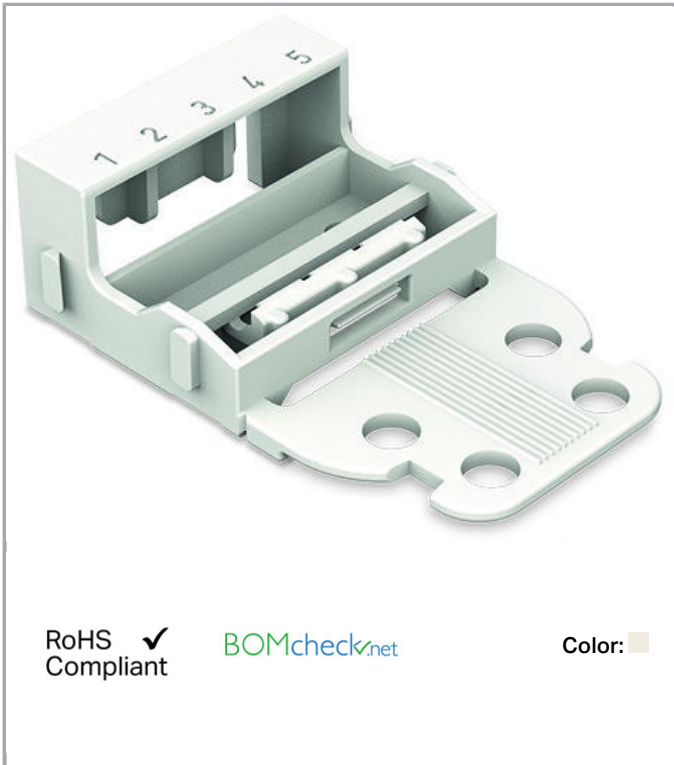

RoHS Compliant

Color:

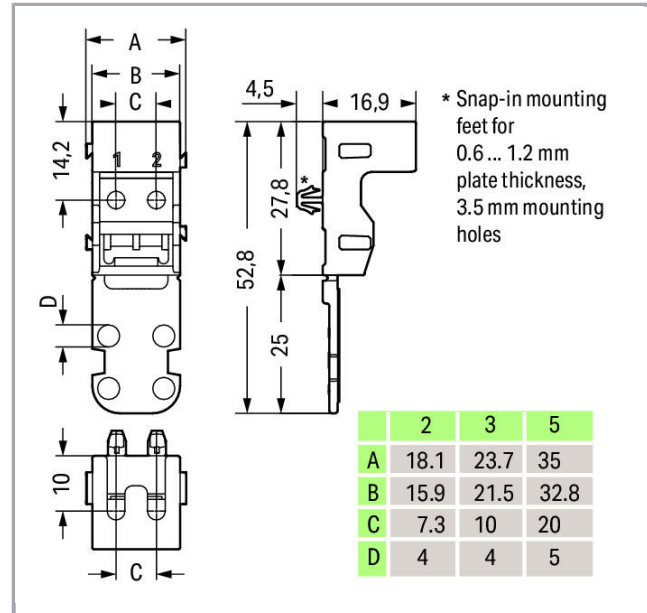

### Data

#### Geometrical Data

Width	35 mm / 1.378 inch
Height	21,4 mm / 0.843 inch
Height from the surface	16,9 mm / 0.665 inch
Depth	52,8 mm / 2.079 inch

#### Material Data

Color	white
Insulating material	Polyamide 66 (PA 66)
Flammability class per UL94	V0
Weight	5 g

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

## Commercial data

Packaging type	BOX
Country of origin	CN
GTIN	4055143640893
Customs Tariff No.	39269097900

## Counterpart

## Downloads

### Documentation

#### Additional Information


Technical explanations	Apr 3, 2019	pdf 2.1 MB	Download
------------------------	-------------	---------------	----------

## CAD/CAE-Data


### CAD data

2D/3D Models 221-515	URL	Download
----------------------	-----	----------

## Installation Notes

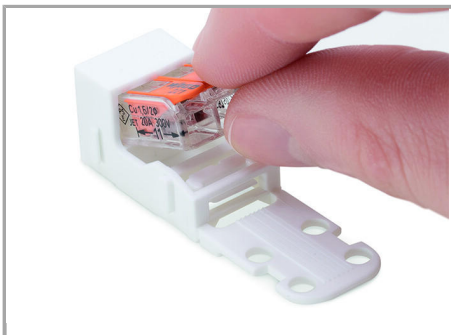


Inserting a connector into the mounting carrier.

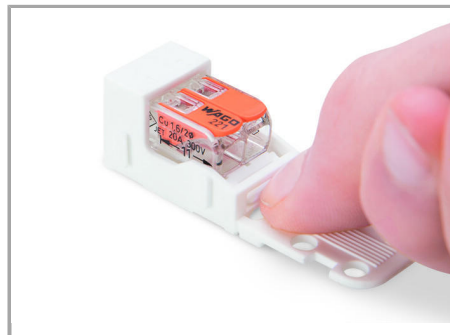


Removing a connector from the mounting carrier.

### Inserting a conductor


Subject to changes. Please also observe the further product documentation!

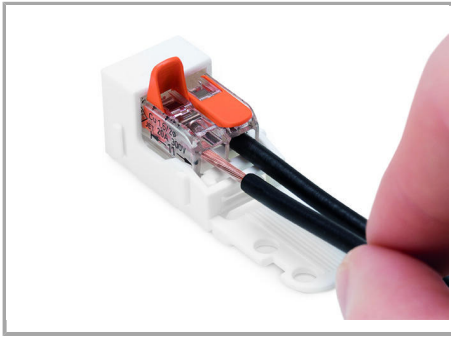


Inserting a conductor.

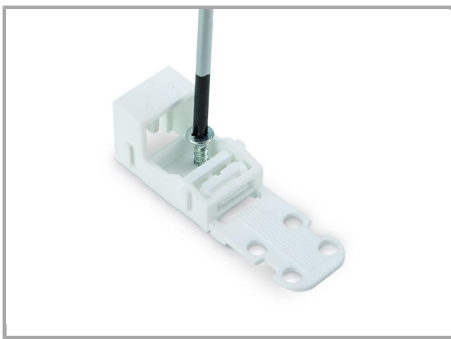


Horizontal screw mounting

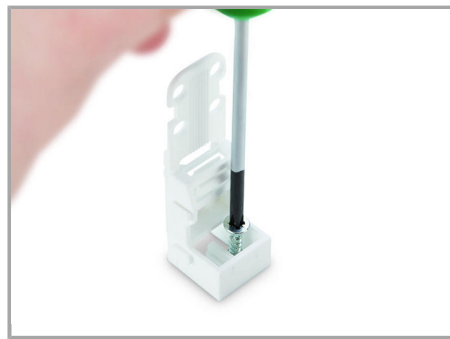

Vertical screw mounting

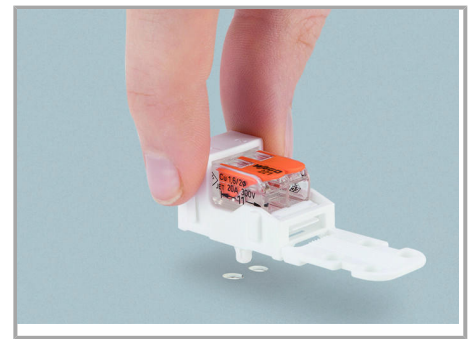


Horizontal mounting via snap-in foot

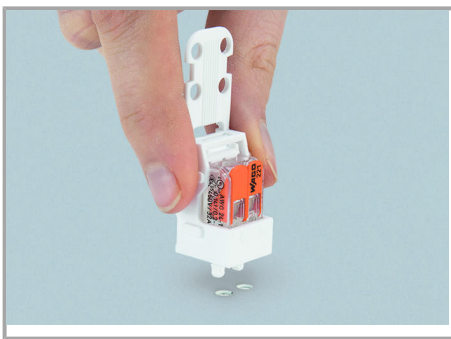

Vertical mounting via snap-in foot

### Strain Relief

Subject to changes. Please also observe the further product documentation!

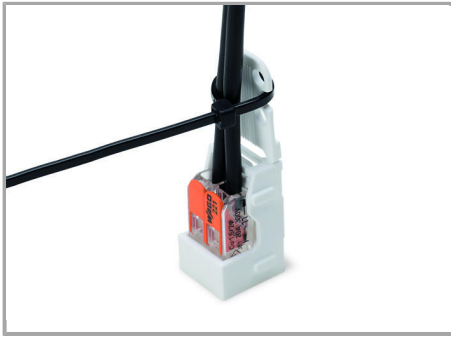


Use a cable tie to secure the conductors to the strain relief plate.



The strain relief plate can be removed.

### Testing

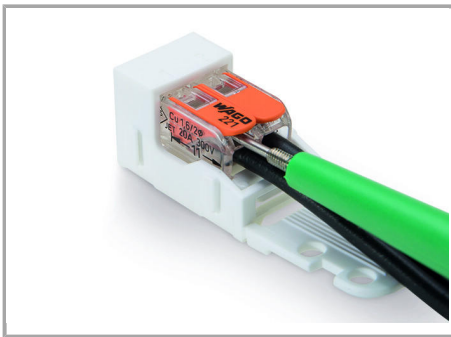

Testing a connector mounted on the carrier via test slot.


### Application



Connecting a light to the mains.

### Marking

Subject to changes. Please also observe the further product documentation!

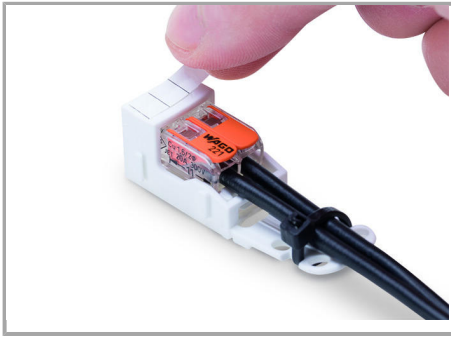

Labeling

Subject to changes. Please also observe the further product documentation!